# BENEITO FAURE®

passion for led light

passion
for
led light


BENEITO FAURE®


BENEITO FAURE
ARSAM
COMERCIAL
BENEITO FAURE



3D map

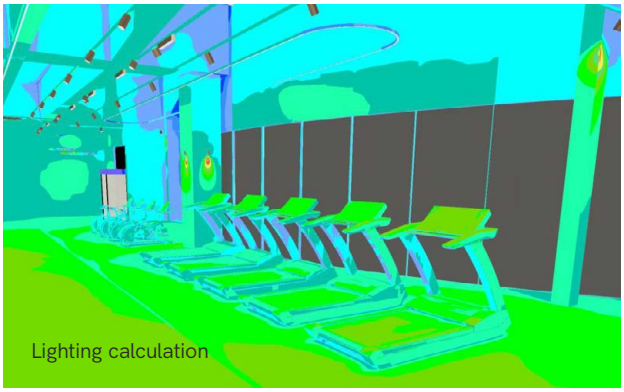

Lighting calculation



Render

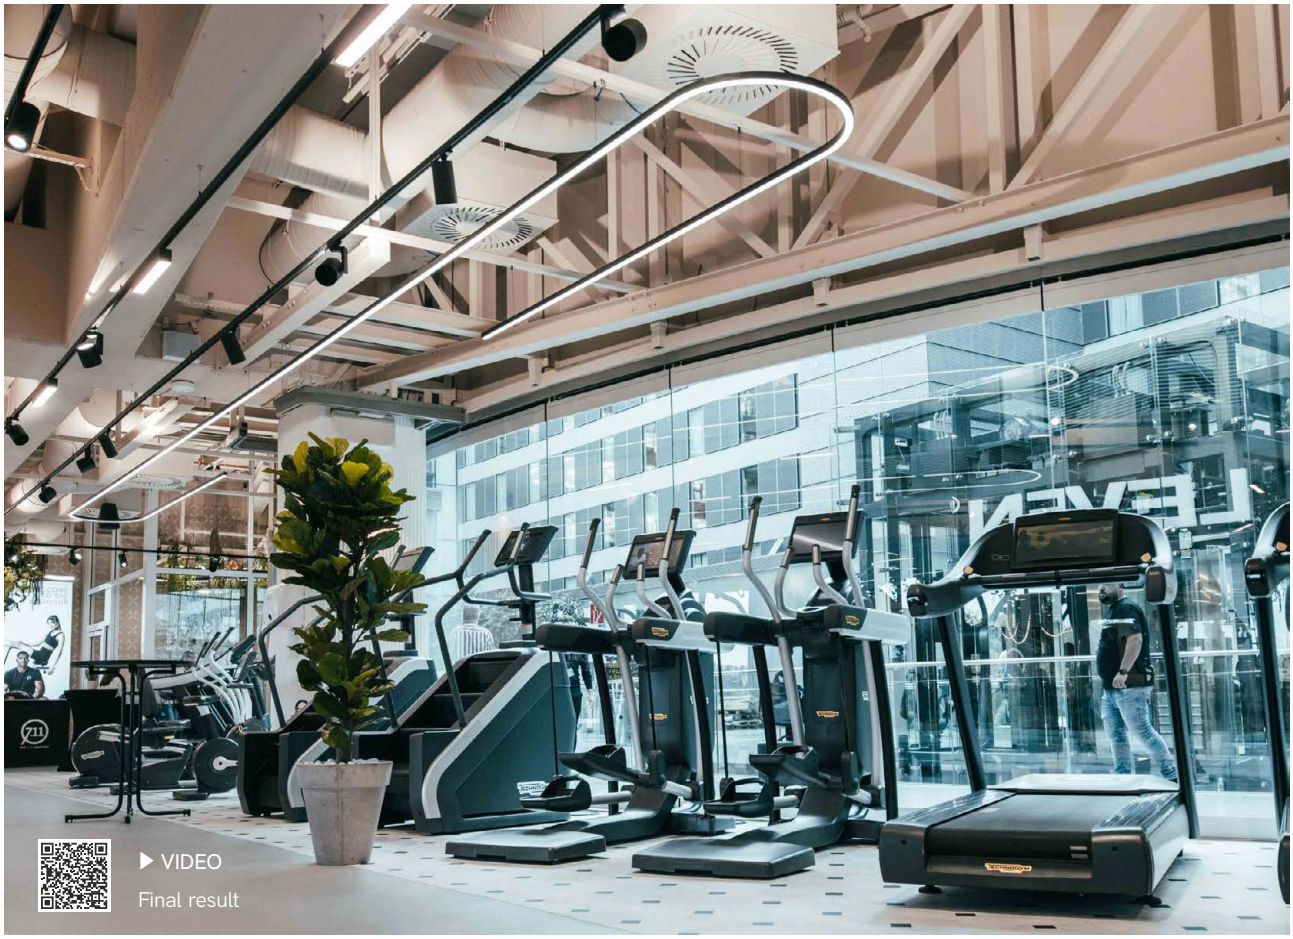

▶ VIDEO
Final result

FITSEVENELEVEN®, Club Frankfurt Airport.

# Projects

Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations.
Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.
If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.
On the left is one of our latest interior lighting projects for the FITSEVENELEVEN® Club at Frankfurt Airport.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.
A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.

Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.
A la izquierda se muestra uno de nuestros últimos proyectos de iluminación interior el Club FITSEVENELEVEN® en el Aeropuerto de Frankfurt.

# Symbology



Installation.
Instalación.



Casambi protocol.
Protocolo Casambi.




Tuya protocol.
Protocolo Tuya.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.




Dali protocol.
Protocolo Dali.




Dali 2 protocol.
Protocolo Dali 2.




Push.
Pulsador.



Emergency kit in luminaire.
Kit de emergencia en luminaria.




TRIAC Dimmable.
Regulable por TRIAC.




Radio frequency.
Radio frecuencia.



Made to measure strip LED cutting.
Corte de tiras LED a medida.




3 light intensities.
3 intensidades luminosas.



Saline-alkali resistance.
Resistencia a los álcalis salinos.



Customized cutting and handling.
Corte y manipulación personalizado.



Corrosion resisting.
Resistencia a la corrosión.



Anti-UV.
Anti-UV.



Customizable color.
Color personalizable.




Type of aluminium.
Tipo de aluminio.



Acoustic absorption.
Absorción acústica.



Fire resistance.
Resistente al fuego.



Recycled materials.
Materiales reciclados.




100% Polyethylene Terephthalate.
100% Tereftalato de polietileno.




Supported weight.
Peso soportado.




Glare rating.
Indice de deslumbramiento.




Color temperature selector.
Selector de temperatura de color.




Power selector.
Selector de potencia.




Color rendering index.
Índice de reproducción cromática.




Water and dust protection.
Resistencia al agua y al polvo.




Beam Angle.
Ángulo de apertura.




Light 360°.
Luz 360°.




Power Factor.
Factor de Potencia.




Voltage.
Tensión de entrada.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.



Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.



Do not cover.
No cubrir.

5
YEARS
WARRANTY

Warranty.
Años de garantía.

30.000
HOURS

Lifetime.
Horas de vida.

50/60
Hz

Hertz.
Hercios.



Class II.
Clase II.

CABLE
24CM

Cable length.
Longitud del cable.




Surge protection.
Protección contra sobretensiones.




Impact resistance.
Resistencia a los impactos.



Touch control.
Control táctil.




Battery autonomy.
Autonomía de la batería.




Charging time with electricity.
Tiempo de carga con corriente.




Motion sensor.
Detector de movimiento.




Distance sensor.
Distancia de detección.




Suitable for closed luminaires.
Apta para luminarias cerradas.




Units per box (min-max).
Unidades por caja.



Electronic waste.
Residuos electrónicos.



Replace cracked protection shield.
Sustituir pantalla de protección con fisuras.



Class I.
Clase I.



Class III.
Clase III.




Supported weight.
Peso soportado.




Operating Temperature.
Temperatura de trabajo.



Ground slope.
Inclinación del suelo.

AKZO
NOBEL

Anti corrosive marine paint.
Pintura anticorrosión marina.




Wireless charging.
Carga inalámbrica.




Battery capacity.
Capacidad de la batería.




Charging time with sun.
Tiempo de carga con sol.




Crepuscular sensor.
Sensor crepuscular.



Gravity sensor.
Sensor gravitatorio.




Adjustable operating time.
Tiempo de encendido regulable.



EMC anti-interference certification.
Certificación anti interferencias EMC.

RoHS

Restriction of Hazardous Substances.
Restricción de sustancias peligrosas.



European conformity.
Conformidad Europea.

# Sampling & Display Stand

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects.
Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products.
Contact our sales department to order your exhibitor.

Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.
Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos.
Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Led strip book

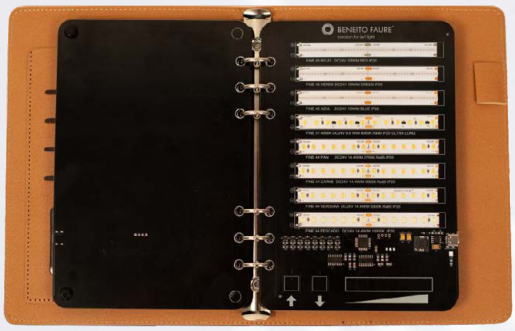

(37x3,5x23,5cm)

Led strip briefcase



(42x15x35cm)

Led strips and profiles
2nd display

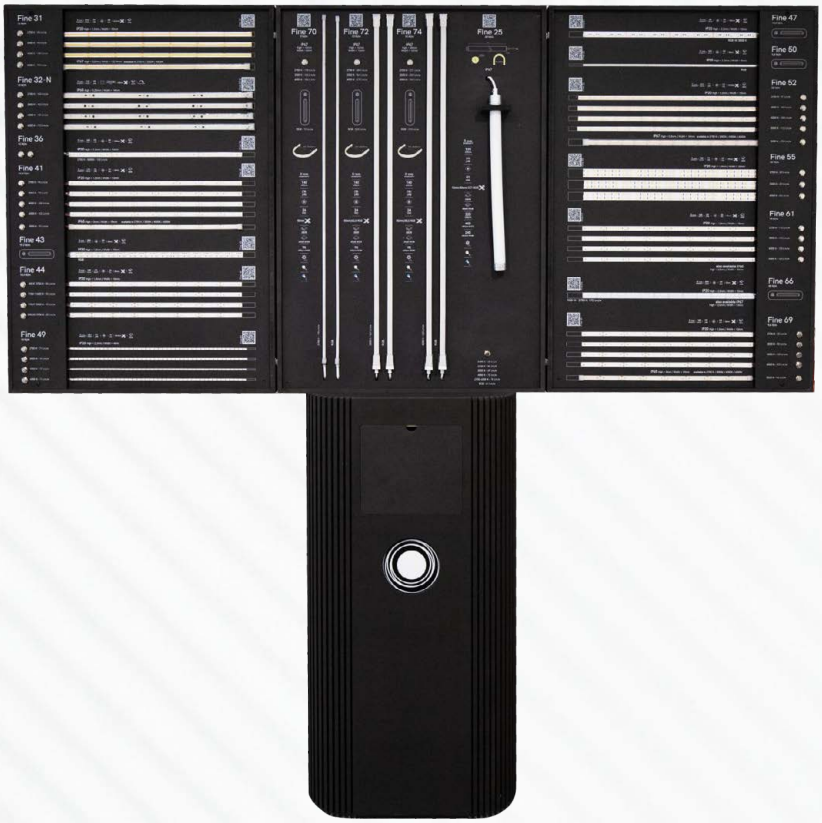


(197x45x197cm)

Led strips and profiles
1st display




(64x40x174cm) / (64x40x213cm)
with 2m profiles

# Sampling & Display Stand




Touch panel

Touch panel display
side A




(110x38x200cm)

Touch panel display
side B



NEW

Magnet track mini display






(71,5x18x46cm)

# HUMAN CENTRIC LIGHTING

## One CCT foreach activity
Un CCT en cada actividad de tu dia

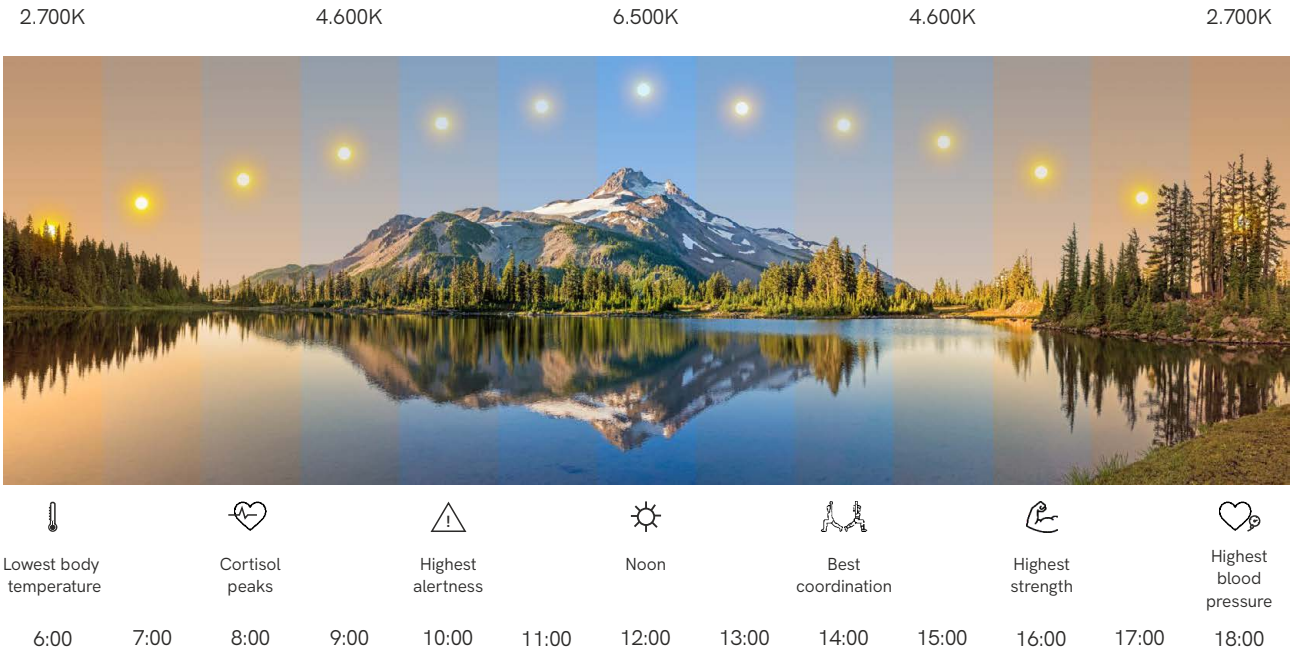


**CCT** is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.
You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El **CCT** es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.
Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.

## Light quality
Calidad de la luz

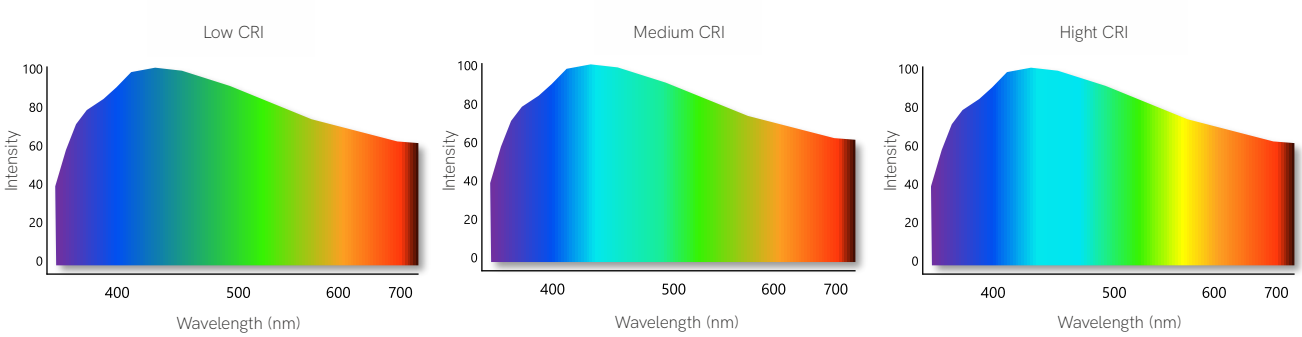


**CRI** or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El **CRI** o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.



**Photobiological risk** are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or RG1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.

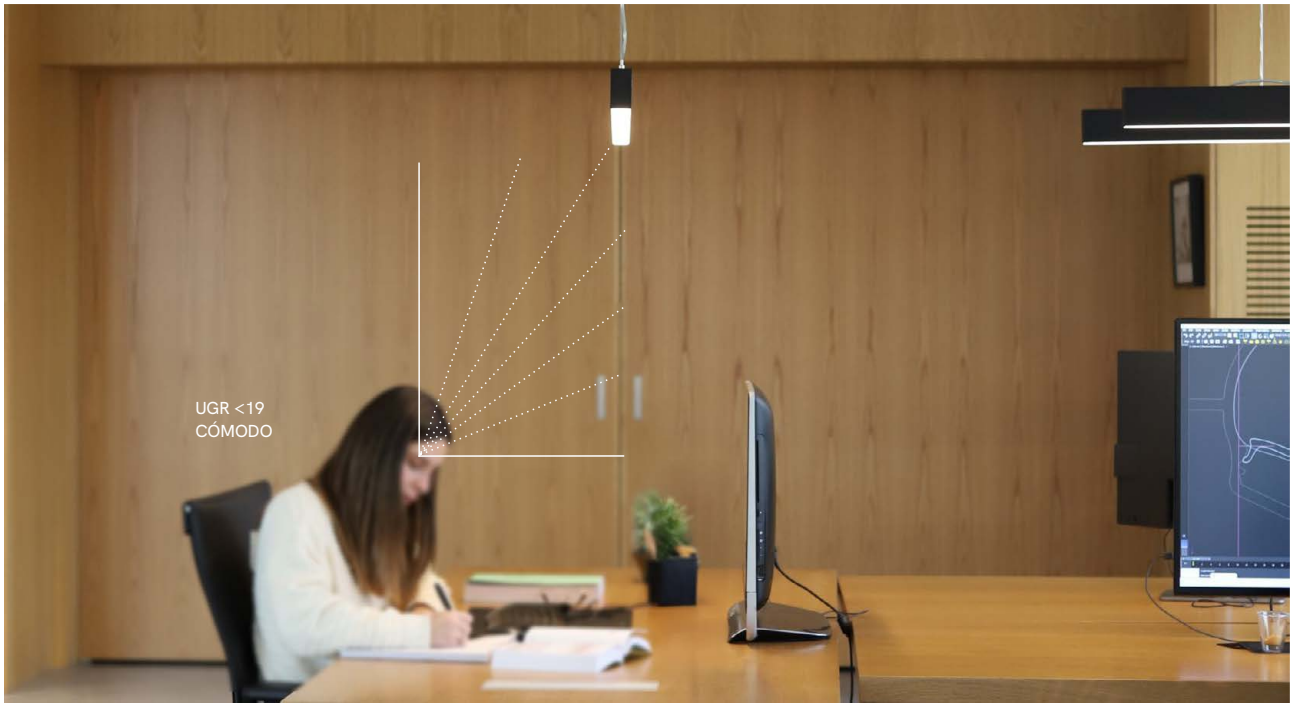


**UGR** or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less o equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

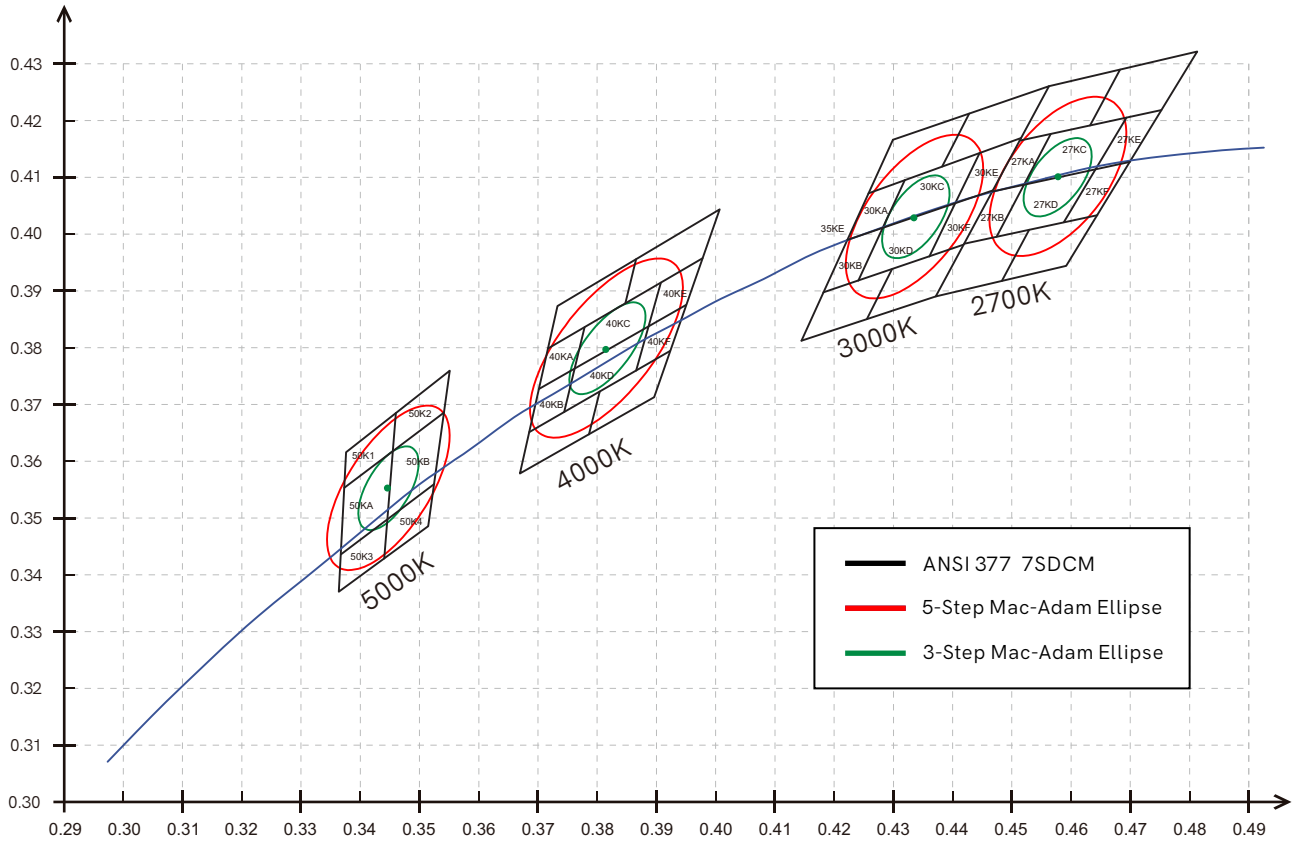


Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos Steps MacAdam son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.

ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.

## The effects of light
## Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.
La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.
Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.

# Custom system



37 Evo


39 Evo fly


41 Evo dual


43 Evo mini


43 Evo R


45 Evo E


47 New Evo mini track


49 Evo track


52 Urban


55 Urban E


57 Urban train


57 New Urban train E


59 Urban fly


59 New Urban fly E


61 Urban work


61 New Urban work E


63 Urban asymmetric


63 New Urban asymmetric E


64 Urban wall sensor


65 Urban track


67 Urban market


69 New Quick


71 New Lift


73 New Vision


75 Time


75 Time E


77 Nexus


79 Dual


81 Forest


83 Time wall sensor


85 Time track


87 Kubo


87 Kubo E


89 Mirrow


91 Tax


93 Filter


95 Tubi


97 Tubi wall


99 Grip


101 Nyneto


103 Minimus


105 Dau


105 Dau E


107 Square


109 New Zero in XL


111 New Zero out XL


113 Zero in


115 Zero out


117 New Circus in XL


117 New Circus out XL


119 Circus in


119 New Circus out


121 Tundra


123 Zero direct XL


125 Zero direct


126-127 Zero design



Zero dual



Kaa



Kaa line



Horizon



Flash



Triton



Triton down



Blaber Pick



Blaber line



Blaber r



Blaber custom



Blaber sq



Blaber mirrow



Blaber evo



Blaber zero direct



Blaber zero in XL



Blaber mac



Blaber atmos



Blaber atmos slim



Blaber trgl



Blaber tax



Custom system accessories


## Profiles




Box 15



Box 16



Box 17



Box 18



Box 53



Box 23



Box 87



Box 92



Box 74



Box 43



Box 95



Box 75



Box 38



Box 35



Box 14



Box 71



Box 60



Box 99



Box 11



Box 12



Box 13


186
Box 10


186
Box 19


187
Box 37


189
Box 24


191
New
Box 69


193
Box 68


193
New
Box 32


194
Box 22


195
Box 33


197
Box 98 railing


198
Box 21


199
Box 27


201
Box 65


203
Box 67


204
Box 39


205
Box 28


207
Box 29


208
Box 73


209
Box 30


## Led strips



216
Fine 64


217
Fine 48


219
New
Fine 97


220
Fine 84


221
Fine 69


222
Fine 41


223
Fine 31


224
New
Fine 92


225
New
Fine 82


226
New
Fine 68


227
New
Fine 79


228
Fine 61


229
Fine 76


231
Fine 52


233
Fine 96


234
Fine 56


235
New
Fine 30


237
Fine 51


238
New
Fine 75


239
Fine 32 N


240
New
Fine 88


241
Fine 49


242
Fine 55


243
New
Fine 37


245
Fine 44


247
Fine 63


248
Fine 36


249
Fine 42

251  Fine 54

253  Fine 46

254  Fine 43

255  Fine 50

257  New Fine 60

259  New Fine 66 N

261  Fine 71

262  Fine 47

263  Fine 45

265  Fine running

267  Fine SPI-2

269  Fine SPI-3

271  Fine SPI-4

273  Fine DMX-4

275  Fine DMX-5

279  Fine 25

281  New Fine 34

283  New Fine 77

285  Fine 70

287  Fine 72

289  Fine 74

291  New Dynamic control

294-295 tuya New Tuya

296-299 CASAMBI New Casambi

300-302  Control

301 SPI SPI

301 DMX DMX

303-304 DALI New Dali

307  New Sensor

308-309  New Power supplies 24V

310-311  New Led strips accessories


## Three phase track


316-319  Three phase track

321  Picolo 3PH

323  Picolo GU10 3PH

323  Picolo AR111 3PH

325  Cookie 3PH

327  Zoom 3PH

329  Aston 3PH / Konic 3PH

331  Tram 3PH

333  Kom 3PH

335  Lonja 3PH

337  Crown 3PH

339  Alfa 3PH

341  Lena 3PH

343  Sono 3PH

## Magnet track mini




Magnet track mini



Picolo 48V mini



Atmos slim 48V mini



Zoe 48V mini



Zoe 48V mini susp.



Sphere 48V mini



Sphere 48V mini susp.



Concord 48V mini



Tram 48V mini



Line 48V mini


## Magnet track




Magnet track 48V



Power supplies 48V



Casambi control



Alp 48V



Alp 48V suspension



Mini Bora 48V



Bora 48V suspension



Tram 48V



Curve tram 48V



Line 48V



Curve line 48V



Diro 48V



Zoe 48V suspension



Hat 48V suspension



Sphere 48V



Sphere 48V susp.



Volt 48V



Dot 48V



Cookie 48V



Cookie 48V susp.



Fine 25 circle 48V


## Outdoor track




Outdoor Track IP



Power supplies 48V IP



Frame 48V IP



Atmos slim 48V IP



Bit 48V IP



Ice 48V IP

## Recessed



409
Argo recessed


411
Atom recessed


413
Micro Zoom recessed


415
Nano Pulsar recessed


415
Nano Pulsar trim


415
Nano pulsar surface


417
Pulsar dimm recessed


417
Pulsar trim


417
Pulsar surface


419
Nano Oxo recessed


421
Mini Oxo recessed


423
Mini Oxo rect recessed


425
Oxo dimm recessed


427
Bora recessed


429
New
Tram recessed


431
Compac recessed


433
Pulcom recessed


435
Pulcom led accessory


435
Pulcom trim


435
Pulcom surface


437
Tao recessed


439
Noi recessed


441-443
New
Thessis recessed


445
Air recessed


447
Bonn recessed


449
Fijo recessed


449
Basculante recessed


449
Eclipse recessed


451
One recessed


451
Zio recessed


453
Luk recessed


455
Bathroom recessed


455
Rok recessed


457
Avant recessed


## Surface



460-461
Golf surface


463
Bora surface


465
Alp surface


467
Plus surface


469
Concord surface


471
Rubyc surface


473
Volt base


475
Volt 3 surface


476
Volt GU10 base


477
Volt 3 GU10 surface


479
Picolo base


481
Picolo GU10 surface


481
Picolo AR111 surface


483
Crown base


485-487
Kora surface


489
Nox surface


491
One surface


491
Zio surface


491
Avant surface

## Suspension


499  Alp space

501  Bora space

503  Lievo space

505  Zoe space

507-509  Side base / Front base

511  Ark suspension

513  Atmos slim susp.

515  Atmos suspension

517  Atmos GU10 susp.

519  Zoe suspension

521  New Hat suspension

523  Bora suspension

525  Cookie susp. base

527  Tot suspension


## Wall


531  Lao

533  Ilo

533  Skin

535  Port

535  Grow

535  Steps

537  Polo

537  Luky

539  Ina

539  Dis

539  Nix

541  Mis wall

543  Pun

545  Artis wall

547  Tween

549  Pure wall

551  Sweet wall

553  Beam wall

555  Mac wall

557  Mac wall base

559  New Lek sensor

561  Lek wall

563  Icon wall

565  Clos wall

567  Neo

569  Neo sensor

571  Oma

573  New Tron

575  Sphere wall

575  Sphere alp wall

579  Comet

581  Zibor

581  Selen

583  Blis

585  Sunset

587  Sunset XL

589  New Pla

591  One GU10 wall

593  Zio GU10 wall

## Portable and table


597  Bag

599  New Bimba

601  Converse

603  Madi

605  Visor portable

607  Stem


## Outdoor


611  Optic

613  New Sigma

615  New Caddie

615  New Fade

617  New Zas

619  Nik

621  Signal

623  New Sair

625  Fix

627  Wech

629  Sky spike

630-631  Sky switch

633  Sky sensor

634-635  Sky

637  Polaris

639  Krion

641  Clos base

643  Cam

645  Mac floor

647  Tura

649  New Twist

651  Gam

653  Popa

655  Proa

657  Egna

659  Iris

661  Visor solar

663  New Sky solar sensor


## Industrial


666-667  Ufo Lens switch

668-669  Ufo Lens Dali

673  Ufo 300W

# Retrofit


676

Tutto MR11 / GU10

677

Hook GU10 /dimm.

678

Uniform-line MR16 / GU10 / dimm.

679

Narrow GU10 dimm.

680

System MR16 / GU10 /dimmable

681

R-63 s-line GU10

682

Power MR16 / GU10 / dimmable

683

Lynk G53 / GU10 / dimmable

684

AR111 15° G53 / GU10

685

Nitro GU10 / Dole GU10

686

Shop E14 / Prisma E14

687

Flama E14 / E27 / dimmable

688

Esférica E14 / E27 / dimmable

689-691

Standard E27 / dimmable

692-693

Globo E27 / dimmable

694

R-39 E14

694

R-50 E14

694

R-63 E27

695

R-80 E27

695

R-90 E27

696

Pl T40 E27

697

Par 30 E27

697

Par 38 E27

697

Par 38 Green E27

698

Sil E27

699

Aria E27 / E40

700-701

Obo E27 / E40

702

Smile E27 / E40

703

Cup E27 / E40

704

Noa E27 / E40

705

Adn G4

706

Uniform-line G4

707

Uniform-line G9

708

Max BA15d

709

Cala G24

710-711

Lineal tubular R7S / dimmable

711

Lineal R7S

712

HQI tubular E27 / G12

712

HQI tubular RX7S

BENEITO FAURE
BF2102
BENEITO FAURE

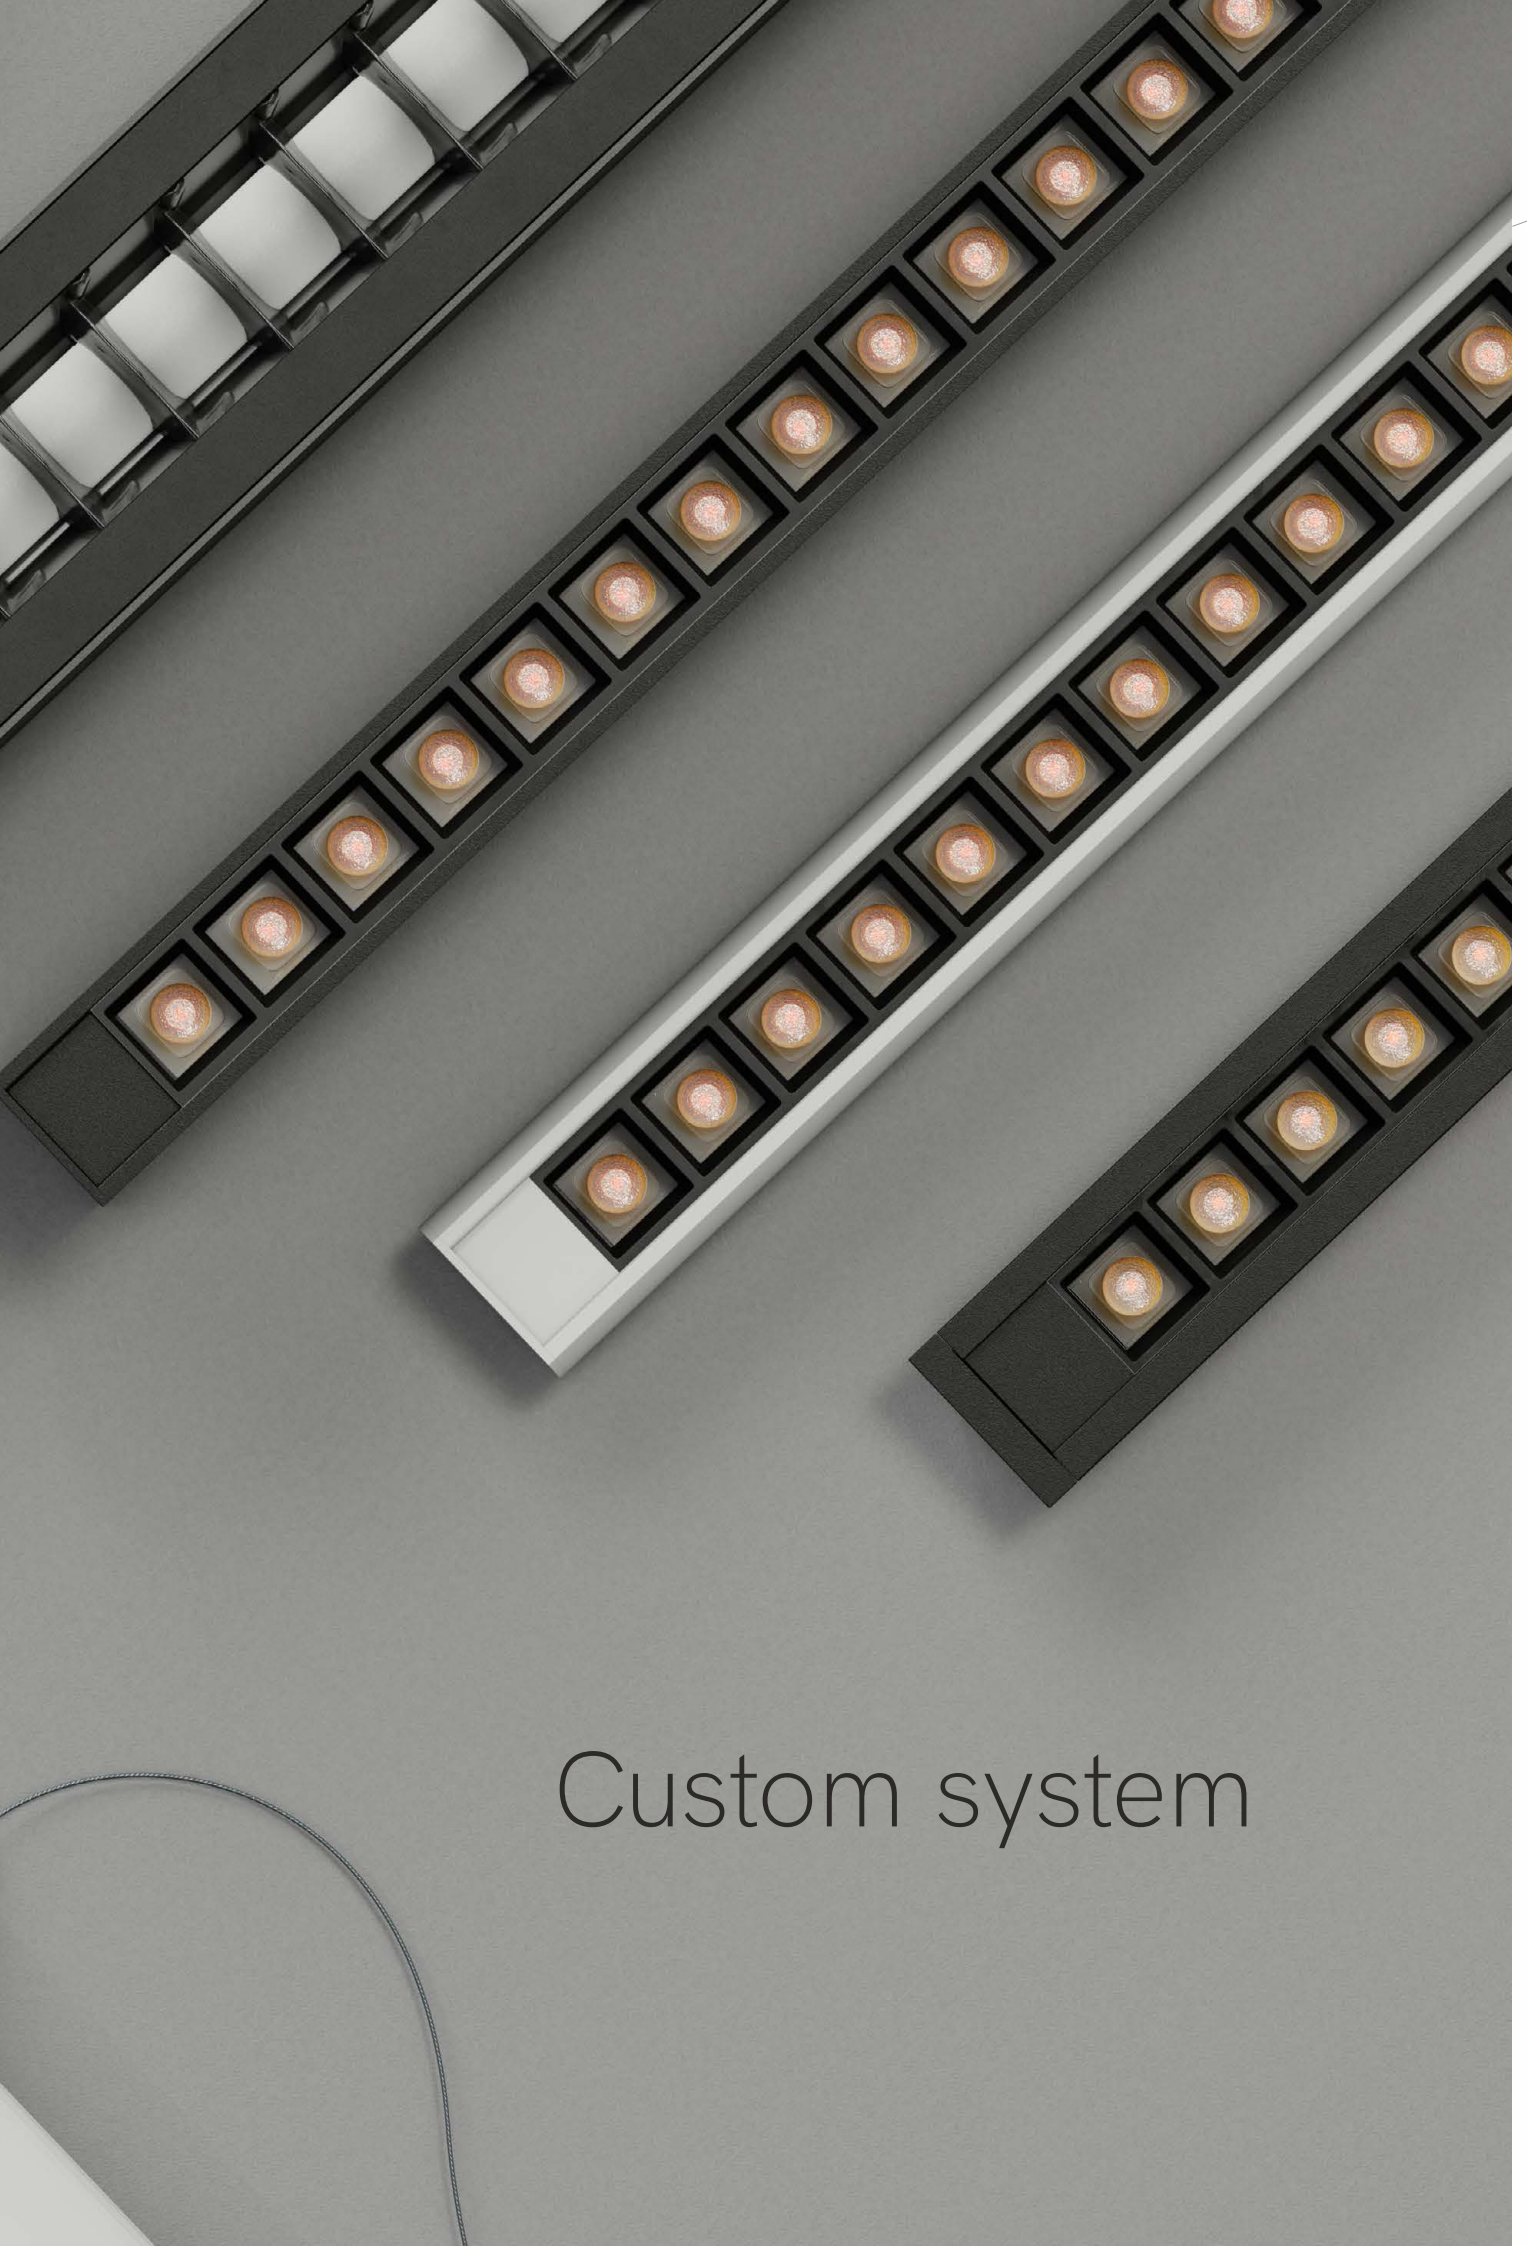

# Custom system

# The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:
- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
- Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
- Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
- Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
- Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
- Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
- Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.

When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality.
Contact us and find out how we can help you achieve your goals!

Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.

Nuestros servicios de I+D destacan por:
- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adapten perfectamente a sus requerimientos.
- Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
- Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
- Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
- Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
- Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
- Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.

Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!


BENEITO FAURE

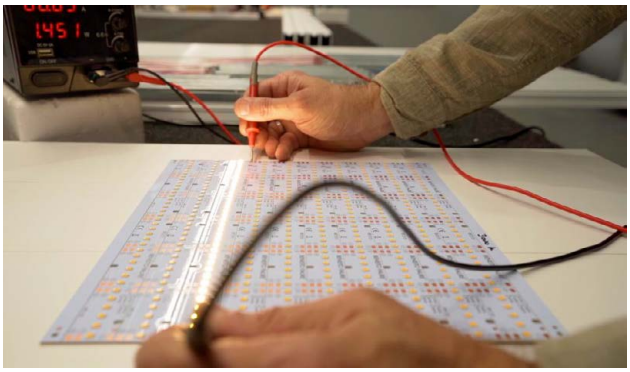



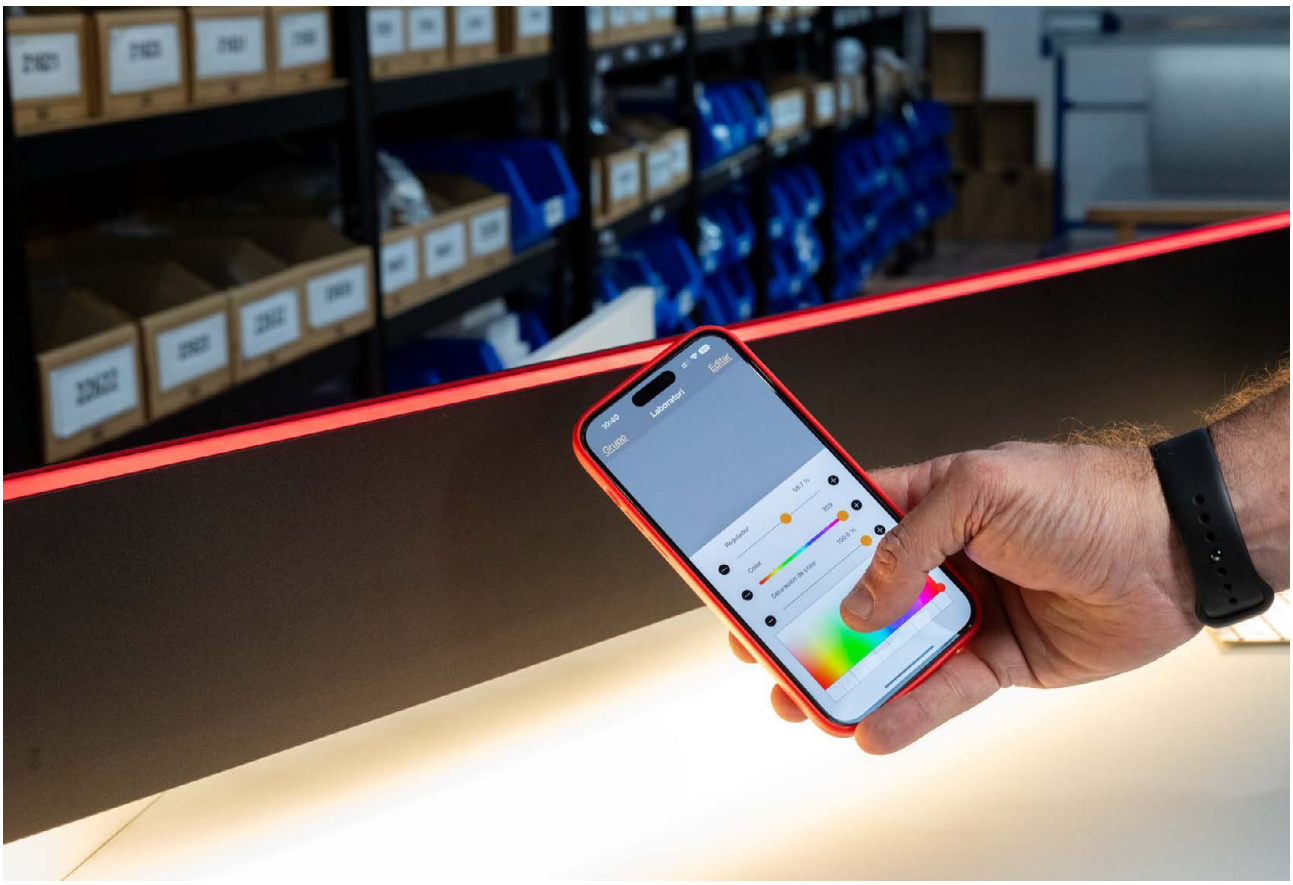



# Do you want a custom-made **luminaire**?

Look for the Cutting symbol and consult our sales department!



Customization of the cut and
handling to the requested size.



# Do you want to customize **your luminaires**?

Look for the Custom RAL or Custom Blaber symbol and consult our sales department!



Custom RAL



Custom Blaber

| | Model | Page | Power | Section Size | Installation |
|---|---|---|---|---|---|
| | EVO | 37 | 38W/47W/56W/74W | 28x60 mm | Pendant |
| | EVO FLY | 39 | 44W/55W/66W/77W | 24x75 mm | Pendant |
| | EVO DUAL | 41 | 49W/61W/73W/86W | 24x75 mm | Pendant / Wall |
| | EVO MINI | 43 | 38W/47W/56W/74W | 28x25 mm | Surface / Pendant |
| | EVO R | 43 | 38W/47W/56W/74W | 35x25 mm | Surface / Pendant |
| | EVO E | 45 | 10W/21W/31W/42W 52W/63W/73W | 34x25 mm | Recessed |
| NEW | EVO MINI TRACK | 47 | 9W/18W | 28x25 mm | Track |
| | EVO TRACK | 49 | 38W/56W | 90x57 mm | Track |
| | URBAN | 52 | 46W/57W/69W/ 80W/103W | 58x68 mm | Surface / Pendant |
| | URBAN E | 55 | 46W/57W/69W/ 80W/103W | 75x68 mm | Recessed |
| NEW | URBAN TRAIN E | 57 | 46W/57W/69W/80W | 75x68 mm | Recessed |
| | URBAN TRAIN | 57 | 46W/57W/69W/80W | 58x68 mm | Pendant |
| NEW | URBAN FLY E | 59 | 2X14W/3X14W 4X14W/6X14W | 75x68 mm | Recessed |
| | URBAN FLY | 59 | 2X14W/3X14W 4X14W/6X14W | 58x68 mm | Pendant |
| NEW | URBAN WORK E | 61 | 35W/43W/51W/ 59W/97,5W | 75x68 mm | Recessed |
| | URBAN WORK | 61 | 35W/43W/51W/ 59W/97,5W | 58x68 mm | Pendant |
| NEW | URBAN ASYMMETRIC E | 63 | 25W/31W/37W/ 43W/55W | 75x68 mm | Recessed |
| | URBAN ASYMMETRIC | 63 | 25W/31W/37W/ 43W/55W | 58x68 mm | Surface / Pendant |
| | URBAN WALL SENSOR | 64 | 21W/32W/43W | 58x68 mm | Wall |
| | URBAN TRACK | 65 | 21W/32W/43W | 58x68 mm | Track |
| | URBAN MARKET | 67 | 45W/55,5W/66W/ 76,5W/97,5W | 58x68 mm | Surface / Pendant |
| NEW | QUICK | 69 | 20W/30W/41W/ 51W/61W/71W | 60x86 mm | Wall |
| NEW | LIFT | 71 | 33W/42W/51W/59W 16W/27W/35W | 35x61,7 mm | Pendant / Wall |
| NEW | VISION | 73 | 33W/42W/51W/59W | 30x35 mm | Surface / Pendant |
| | TIME E | 75 | 31W/46W/69W | 54x75 mm | Recessed |
| | TIME | 75 | 31W/46W/69W | 39x75 mm | Surface / Pendant |

| CRI | CCT | IP | Standard finishes |
|---|---|---|---|
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K CCT | 40 IP | White Black |
| ≥80 CRI | 2700K 3000K 4000K RGB-W | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black Gray Matt Gold Corten Copper |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 20 IP | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5000K CCT | 20 IP | White Black |
| 80/93 CRI | 3000K MEAT R HAM MEAT M 4000K FISH FRUIT BREAD | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB CCT | 20 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K RGB-W CCT | 40 IP | White Black |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | White Black Gray |
| ≥95 CRI | 2700K 3000K 4000K 5000K | 40 IP | White Black Gray |

| | Model | Page | Power | Section Size | Installation |
|---|---|---|---|---|---|
| | NEXUS | 77 | 46W/70W | 39x75 mm | Pendant |
| | DUAL | 79 | 18-24W/28-35W/ 46-52W | 39x125 mm | Pendant |
| | FOREST | 81 | 31W/38W/46W/53W | 64x95 mm | Pendant |
| | TIME WALL SENSOR | 83 | 15W/23W/31W | 39x75 mm | Wall |
| | TIME TRACK | 85 | 15W/23W/31W | 39x75 mm | Track |
| | KUBO E | 87 | 31W/38W/46W/54W | 50x35 mm | Recessed |
| | KUBO | 87 | 31W/38W/46W/54W | 36,5x34 mm | Surface / Pendant |
| | MIRROW | 89 | 85W/94W | 36,5x33,5 mm | Pendant |
| | TAX | 91 | 52W/64W | 36,5x33,5 mm | Pendant |
| | FILTER | 93 | 32W/120W | Ø60 mm | Pendant |
| | TUBI | 95 | 35W/44W/53W/62W | Ø62 mm | Pendant |
| | TUBI WALL | 97 | 35W/44W/53W | Ø62 mm | Wall |
| | GRIP | 99 | 26W/33W/39W/46W | Ø28 mm | Pendant |
| | NYNETO | 101 | 16W/20W/24W/28W | 10x12 mm | Pendant |
| | MINIMUS | 103 | 25W/31W/37W/43W | 16x25 mm | Surface / Pendant |
| | DAU E | 105 | 18W/23W/26W/30W | 34x25 mm | Recessed |
| | DAU | 105 | 18W/23W/26W/30W | 25x25 mm | Surface / Pendant |
| | SQUARE | 107 | 43W/62W | 25x25 mm | Pendant |
| NEW | ZERO IN XL | 109 | 37W/65W/94 | 21x38 mm | Pendant |
| NEW | ZERO OUT XL | 111 | 37W/65W/94 | 21x38 mm | Pendant |
| | ZERO IN | 113 | 26W/44W/63W/96W | 11x30 mm | Pendant |
| | ZERO OUT | 115 | 26W/44W/63W/96W | 11x30 mm | Pendant |
| NEW | CIRCUS IN XL | 117 | 37W/65W/94W | 38x21 mm | Pendant |
| NEW | CIRCUS OUT XL | 117 | 37W/65W/94W | 38x21 mm | Pendant |
| | CIRCUS IN | 119 | 26W/44W/63W | 30x11 mm | Pendant |
| NEW | CIRCUS OUT | 119 | 26W/44W/63W | 30x11 mm | Pendant |

| CRI | CCT | IP | Standard finishes |
|---|---|---|---|
| ≥95 CRI | CCT | 40 IP | White, Black, Gray |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K | 40 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K, CCT | 40 IP | Wood |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K | 20 IP | White, Black, Gray |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K | 20 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 40 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K, RGB-W, CCT | 20 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB | 20 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, 5000K, RGB-W, CCT | 40 IP | White, Black |
| ≥95 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 40 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB, CCT | 40 IP | Black |
| ≥90 CRI | 2700K, 3000K, 4000K | 20 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K | 40 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K, 5000K, RGB-W, CCT | 20 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K, 5000K, RGB-W, CCT | 20 IP | White, Black |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |
| ≥90 CRI | 2700K, 3000K, 4000K, RGB-W, CCT | 20 IP | White, Black, Matt Gold, Silver |

| | Model | Page | Power | Section Size | Installation |
|---|---|---|---|---|---|
| | TUNDRA | 121 | 77W/112W | 21x38 mm | Pendant |
| | ZERO DIRECT XL | 123 | 78W/105W/131W | 95x90 mm | Pendant |
| | ZERO DIRECT | 125 | 35W/55W/75W/94W 189W | 36,5x33,5 mm | Surface / Pendant |
| | ZERO DESIGN | 126-127 | 22W/m | 36,5x33,5 mm | Surface / Pendant |
| | ZERO DUAL | 131 | 107W/162W/325W | 50x60 mm | Pendant |
| | KAA | 133 | 90W/180W/300W | Ø25 mm | Pendant |
| | KAA LINE | 135 | 30W/60W/100W | Ø25 mm | Pendant |
| | HORIZON | 137 | 48W-288W | 15 mm | Pendant |
| | FLASH | 139 | 16W/27W/35W/ 46W/55W | 18x49 mm | Wall |
| | TRITON | 141 | 21W/41W/61W | 47x66 mm | Surface |
| | TRITON DOWN | 143 | 46W/57W/69W/ 80W/103W | 47x66 mm | Surface / Pendant |
| NEW | BLABER PICK | 147 | 25W/30W/34W/38W | 20x22,5 mm | Pendant |
| | BLABER LINE | 149 | 30W/39W/49W | 54x300 mm | Pendant |
| | BLABER R | 151 | | | Pendant |
| NEW | BLABER CUSTOM | 151 | | | Pendant |
| | BLABER SQ | 152 | | | Pendant / Armstrong |
| NEW | BLABER MIRROW | 153 | 85W/94W | | Pendant |
| NEW | BLABER EVO | 153 | | | Pendant |
| NEW | BLABER ZERO DIRECT | 155 | 35W/55W/75W | | Pendant |
| NEW | BLABER ZERO IN XL | 155 | 37W/65W/94W | | Pendant |
| NEW | BLABER MAC | 157 | 23W/33W/45W | | Wall |
| NEW | BLABER ATMOS | 159 | 10W | | Pendant |
| NEW | BLABER ATMOS SLIM | 159 | 6W | | Pendant |
| | BLABER TRGL | 161 | | | Pendant |
| NEW | BLABER TAX | 161 | 52W/64W | | Pendant |

| CRI | CCT | IP | Standard finishes |
|---|---|---|---|
| ≥80 CRI | 2700K 3000K 4000K RGB-W CCT | 20 IP | White Black Matt Gold Silver |
| ≥80 CRI | 2700K 3000K 4000K | 20 IP | White Black Gray |
| ≥80 CRI | 2700K 3000K 4000K CCT | 20 IP | White Black Matt Gold Silver |
| ≥80 CRI | 2700K 3000K 4000K CCT | 20 IP | White Black Gray Matt Gold |
| ≥80 CRI | 3000K 4000K | 20 IP | White Black |
| ≥90 CRI | 2400K 2700K 3000K 4000K CCT | 40 IP | White Black |
| ≥90 CRI | 2400K 2700K 3000K 4000K RGB-W CCT | 40 IP | White Black Matt Gold |
| ≥90 CRI | 2700K 3000K 4000K | 20 IP | White Black |
| ≥80 CRI | 2700K 3000K 4000K 6000K | 20 IP | White Black Alum. |
| ≥80 CRI | 2700K 3000K 4000K | 65 IP | Black |
| ≥95 CRI | 2700K 3000K 4000K 5500K | 65 IP | White Black |
| ≥90 CRI | 2700K 3000K 4000K CCT | 40 IP | |
| ≥90 CRI | 2700K 3000K 4000K | 40 IP | |
| | | | |
| | | | |
| | | | |
| | 2700K 3000K 4000K RGB-W CCT | | |
| | 2700K 3000K 4000K RGB-W CCT | | |
| | 2700K 3000K 4000K CCT | | |
| | 2700K 3000K 4000K RGB-W CCT | | |
| | 3000K 4000K RGB-W | | |
| | 2700K 3200K 4000K | | |
| | CCT | | |
| | | | |
| | | | |



## Evo






Equipment

Ø60x28mm




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 38W / 47W / 56W / 74W |
| Lumens | 3.268 lm - 8.954 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 2 | Black Slats (60°) | N | 1.170mm | 2 | 2.700K (91-104 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | White Slats (60°) | P | N 1.450mm | 3 | 3.000K (96-109 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.730mm | 4 | 4.000K (103-121 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | 2.290mm | 6 | N RGB-W (86 lm/W) | 8 | Casambi | 5 | | |
| | | | | | | N 2.700-6.500K (95/105 lm/W) | 9 | N Tuya | 7 | | |

Code: 2

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | PUSH | DALI 2



## Evo fly






Equipment

Ø60x28mm




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 44W / 55W / 66W / 77W |
| Lumens | 3.872 lm - 9.317 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Down Rigid / Up Flex |

| Code | Diffuser (Angle) | Size (Power) | CCT (lm/W) | Driver | Colour |
|---|---|---|---|---|---|
| Code 4 | Down Black Slats (60°) Up Opal N | 1.120mm (44W) 4 | 2.700K Down (91-104 lm/W) Up (88 lm/W) 2 | On / Off 1 | White (9003) 1 |
| | Down White Slats (60°) Up Opal P | 1.400mm (55W) 5 | 3.000K Down (96-109 lm/W) Up (92 lm/W) 3 | Dali 2 | Black (9005) 2 |
| | | 1.680mm (66W) 6 | 4.000K Down (104-121 lm/W) Up (96 lm/W) 4 | Push 3 | ① Custom RAL C |
| | | 1.960mm (77W) 7 | N 2.700K 6.500K Down (95-105 lm/W) Up (100 lm/W) 5 | Casambi 5 | |

Code: 4

CE RoHS EAC

① Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2



## Evo dual






Equipment

Ø60x28mm




## Evo dual wall






Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

Evo dual wall

Evo dual

## Technical Information

| | |
|---|---|
| Power | 49W / 61W / 73W / 86W |
| Lumens | 4.410 lm - 11.696 lm |
| Installation | Pendant / Wall |
| Material | Aluminium |
| PCB | Flex / Rigid |

| Code | |
|---|---|
| Code | 5 |

| Installation | |
|---|---|
| Pendant | 3 |
| Wall | 7 |

| Size (Power) | |
|---|---|
| 1.130mm (49W) | 4 |
| 1.410mm (61W) | 5 |
| 1.690mm (73W) | 6 |
| 1.970mm (86W) | 7 |

| CCT (lm/W) | |
|---|---|
| Down-Up 2.700K (124 lm/W) | 2 |
| Down-Up 3.000K (128 lm/W) | 3 |
| Down-Up 4.000K (136 lm/W) | 4 |
| Down-Up RGB (100 lm/W) | 8 |
| Down-Up 1.800-4.000K (90 lm/W) | 9 |
| Down 1.800-4.000K Up RGB | C |
| Down 2.700K Up RGB | D |
| Down 3.000K Up RGB | T |
| Down 4.000K Up RGB | Q |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 5

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥80 | 2x90° | 1,96m Max | tuya | PUSH | DALI 2

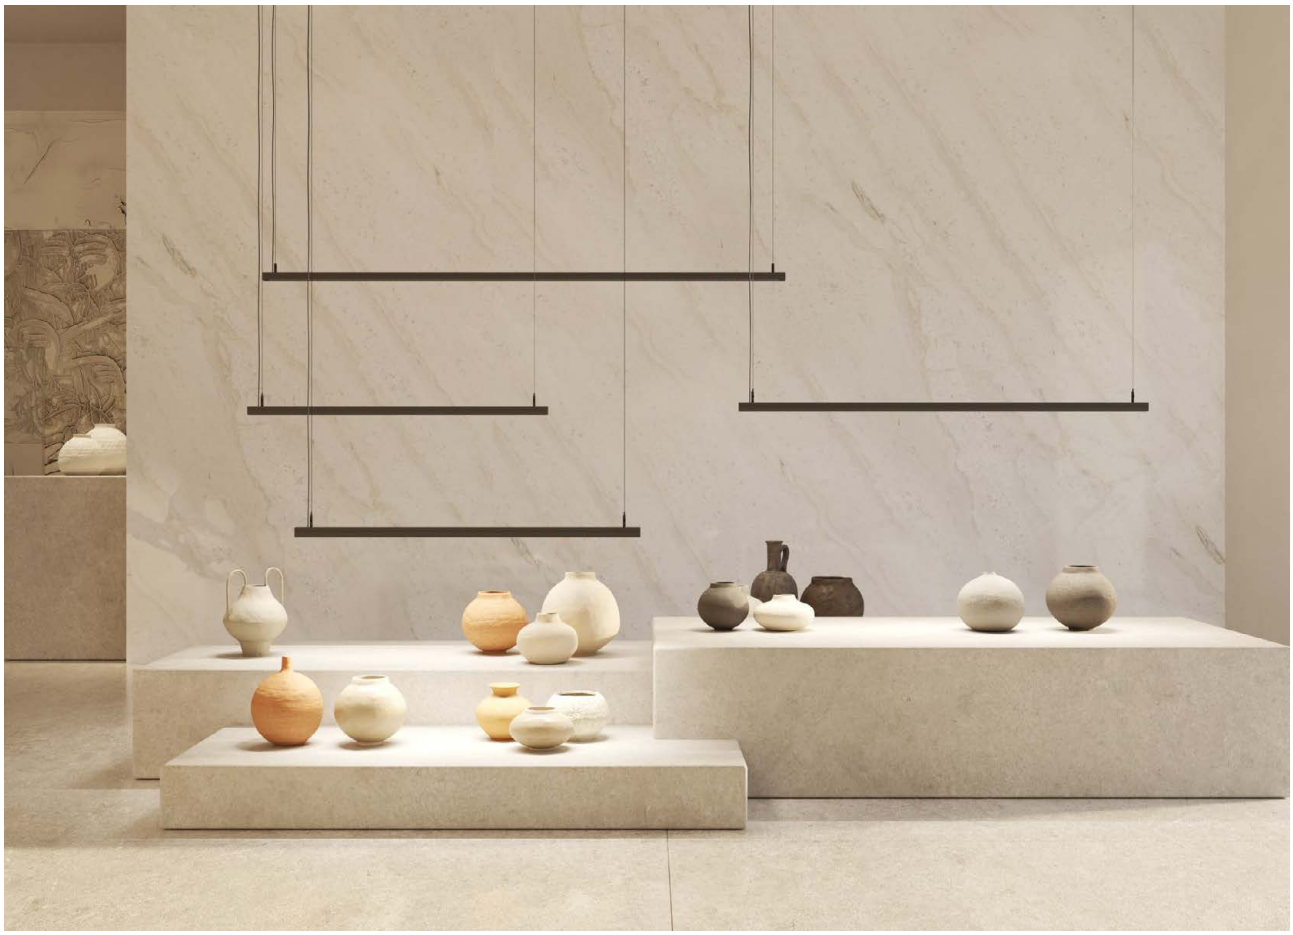



## Evo mini






## Evo R






## Equipment

Codes **8** and **3** recessed driver

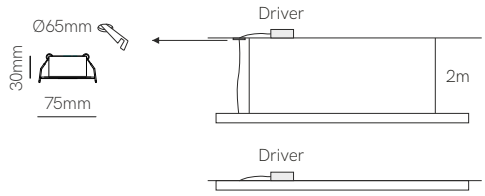


Codes **1** and **7** surface driver




Evo mini Evo R

Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 38W / 47W / 56W / 74W |
| Lumens | 3.458 lm - 8.954 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Evo mini recessed | 8 | Black Slats (60°) | N | 1.170mm | 2 | 2.700K (91-104 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| N Evo mini surface | 1 | White Slats (60°) | P | N 1.450mm | 3 | 3.000K (96-109 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| Evo r recessed | 3 | | | 1.730mm | 4 | 4.000K (103-121 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| N Evo r surface | 7 | | | 2.290mm | 6 | N 2.700-6.500K (95-105 lm/W) | 9 | Casambi | 5 | | |
| | | | | | | | | N Tuya | 7 | | |

Code:

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 3,37m Max | tuya | PUSH | DALI 2


CURIOUS
Helvetica Now

## Evo E

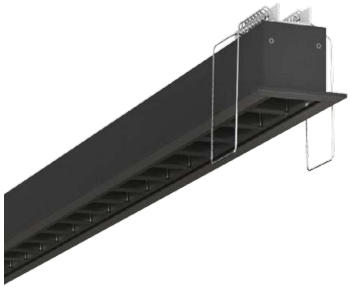










Control accessories pages 294-307.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 10W / 21W / 31W / 42W / 52W / 63W / 73W |
| Lumens | 860 lm - 8.833 lm |
| Installation | Recessed |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 5 | N Black Slats (30°) | C | 280mm | 1 | 2.700K (91-104 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | N White Slats (30°) | F | 560mm | 2 | 3.000K (96-109 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | Black Slats (60°) | N | 840mm | 3 | 4.000K (104-121 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | White Slats (60°) | P | 1.120mm | 4 | N RGB-W (86 lm/W) | 8 | Casambi | 5 | | |
| | | | | 1.400mm | 5 | N 2.700-6.500K (95-105 lm/W) | 9 | N Tuya | 7 | | |
| | | | | 1.680mm | 6 | | | | | | |
| | | | | 1.960mm | 7 | | | | | | |

Code: 5

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,96m Max | PUSH | DALI 2



New

## Evo mini track






### Equipment




*Finished luminaire.

### Technical Information

| | |
|---|---|
| Power | 9W / 18W |
| Lumens | 819 lm - 2.178 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 6 |

| Diffuser (Angle) | |
|---|---|
| Black Slats (60°) | N |
| White Slats (60°) | P |

| Size | |
|---|---|
| 310mm | 1 |
| 590mm | 8 |

| CCT (lm/W) | |
|---|---|
| 2.700K (91-104 lm/W) | 2 |
| 3.000K (96-109 lm/W) | 3 |
| 4.000K (104-121 lm/W) | 4 |

| Driver | |
|---|---|
| On / Off | 1 |
| Triac | 4 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ① Custom RAL | C |

Code: 6

CE RoHS

① Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90


CONTEMPORAI

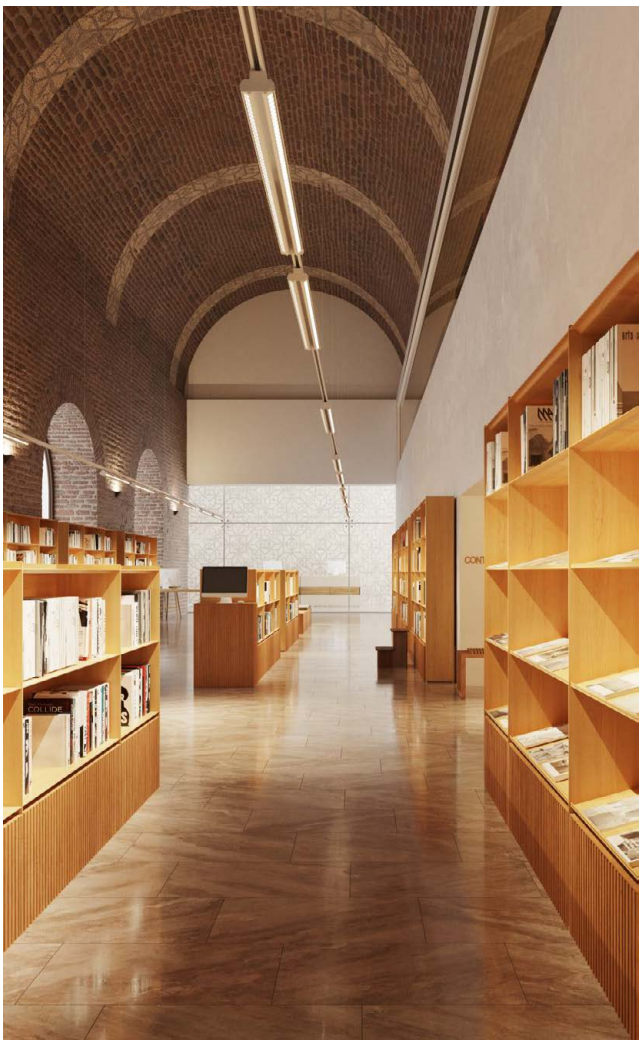

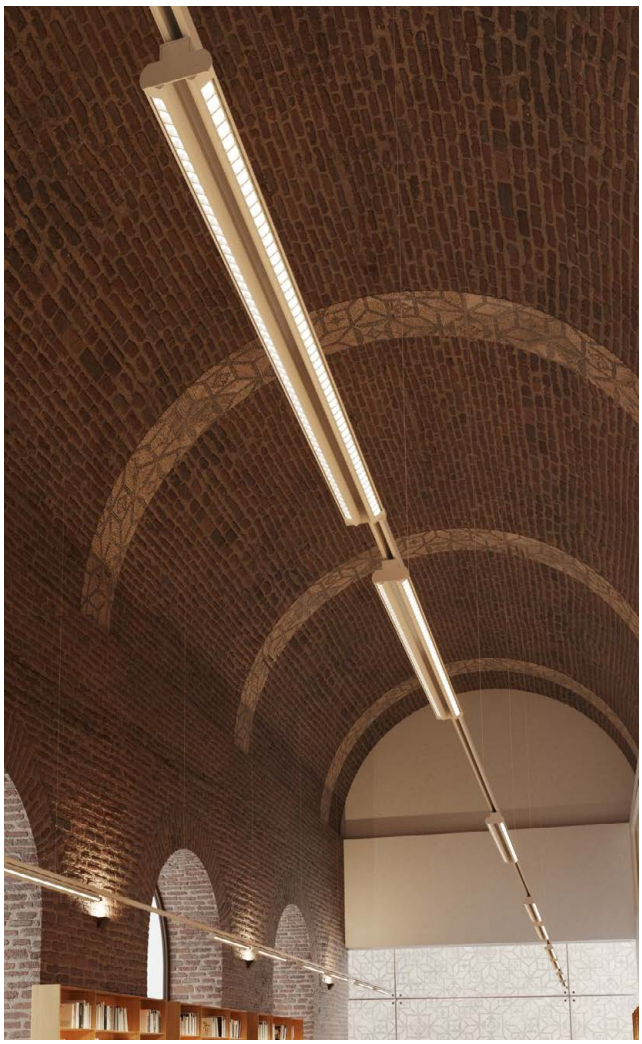

## Evo track



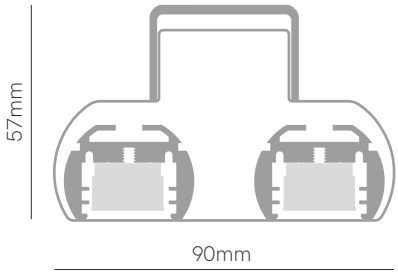


Equipment



*Finished luminaire.

## Technical Information

| | |
|---|---|
| Power | 38W / 56W |
| Lumens | 3.458 lm - 6.776 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 9 | Black Slats (30°) | C | 610mm | 2 | 2.700K (91-104 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | White Slats (30°) | F | 890mm | 3 | 3.000K (96-109 lm/W) | 3 | | | Black (9005) | 2 |
| | | Black Slats (60°) | N | | | 4.000K (103-121 lm/W) | 4 | | | Custom RAL | C |
| | | White Slats (60°) | P | | | | | | | | |

Code: 9 1

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,17m Max





# Urban collection

## Urban

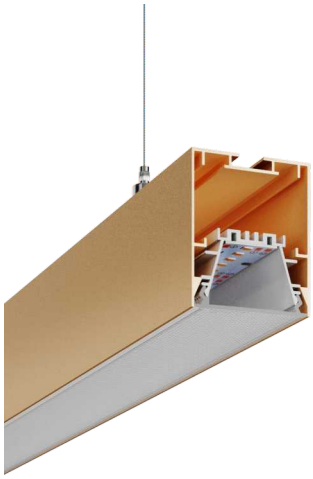




Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W / 103W |
| Lumens | 4.830 lm - 14.008 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) | 5 | Casambi | 5 | ⓘ Matt Gold | 4 |
| | | | | 2.530mm | 7 | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | ⓘ Corten | 6 |
| | | | | | | | | | | ⓘ Copper | 7 |
| | | | | | | | | | | ⓘ Custom RAL | C |

Code: 6

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

## Accessories



End caps
- 40721
- 40722
- 40723



Joint 180°
- 40220



Joint 90°
- 40550



Wall bracket
- 40851
- 40852
- 40853



Trimless
- 40669



Base 3x0,75 (2,5m) Ø60x28mm
- 40881
- 40882
- 40883



Base 5x0,5 (2,5m) Ø60x28mm
- 40991
- 40992
- 40993



Ceiling suspension
- 40780



Suspension Kit
- 40790 (2m)

CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

New

## Urban emergency



| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Emergency + Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | N Emergency + On / Off | K1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | N Emergency + Dali | K2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | N Emergency + Push | K3 | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) | 5 | N Emergency + Casambi | K5 | | |
| | | | | 2.530mm | 7 | 2.700-5.500K (105 lm/W) | 9 | | | | |

Code: 6

Emergency
4.000K 200lm | 1/3H.

New

## Urban sensor casambi



Urban sensor incorporates a presence and illuminance (brightness) sensor, this works with the CASAMBI wireless control system via Bluetooth.
The equipment can be configured in different ways to activate scenes of any luminaire of the CASAMBI network by presence or illuminance.

Urban sensor incorpora un detector de presencia e iluminancia (luminosidad), este funciona con el sistema de control inalámbrico CASAMBI mediante Bluetooth. El equipo se puede configurar de diferentes maneras para activar escenas de cualquier luminaria de la red CASAMBI por presencia o iluminancia.

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Sensor + Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | N Sensor + Casambi | 8 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | | | Custom RAL | C |

Code: 6 8



## Urban E



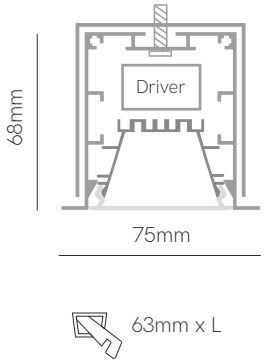


63mm x L

Control accessories pages 294-307.

*Spring clips included.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 46W / 57W / 69W / 80W / 103W | Material | Aluminium |
| Lumens | 4.830 lm - 14.008 lm | PCB | Rigid |
| Installation | Recessed | | |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver / Emergency | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | UGR (78°) | 4 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | Opal (112°) | 5 | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) | 5 | Casambi | 5 | Custom RAL | C |
| | | | | 2.530mm | 7 | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | | |
| | | | | | | | | N Emergency + On / Off | K1 | | |
| | | | | | | | | N Emergency + Dali | K2 | | |
| | | | | | | | | N Emergency + Push | K3 | | |
| | | | | | | | | N Emergency + Casambi | K5 | | |

Code: 3

Accessories pages 162-163.
Consult delivery terms and conditions.
*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

## Accessories

End caps
- 40731
- 40732
- 40733


Joint 180°
40220


Joint 90°
40550

CE RoHS EMC

Emergency
4.000K 200lm | 1/3H.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

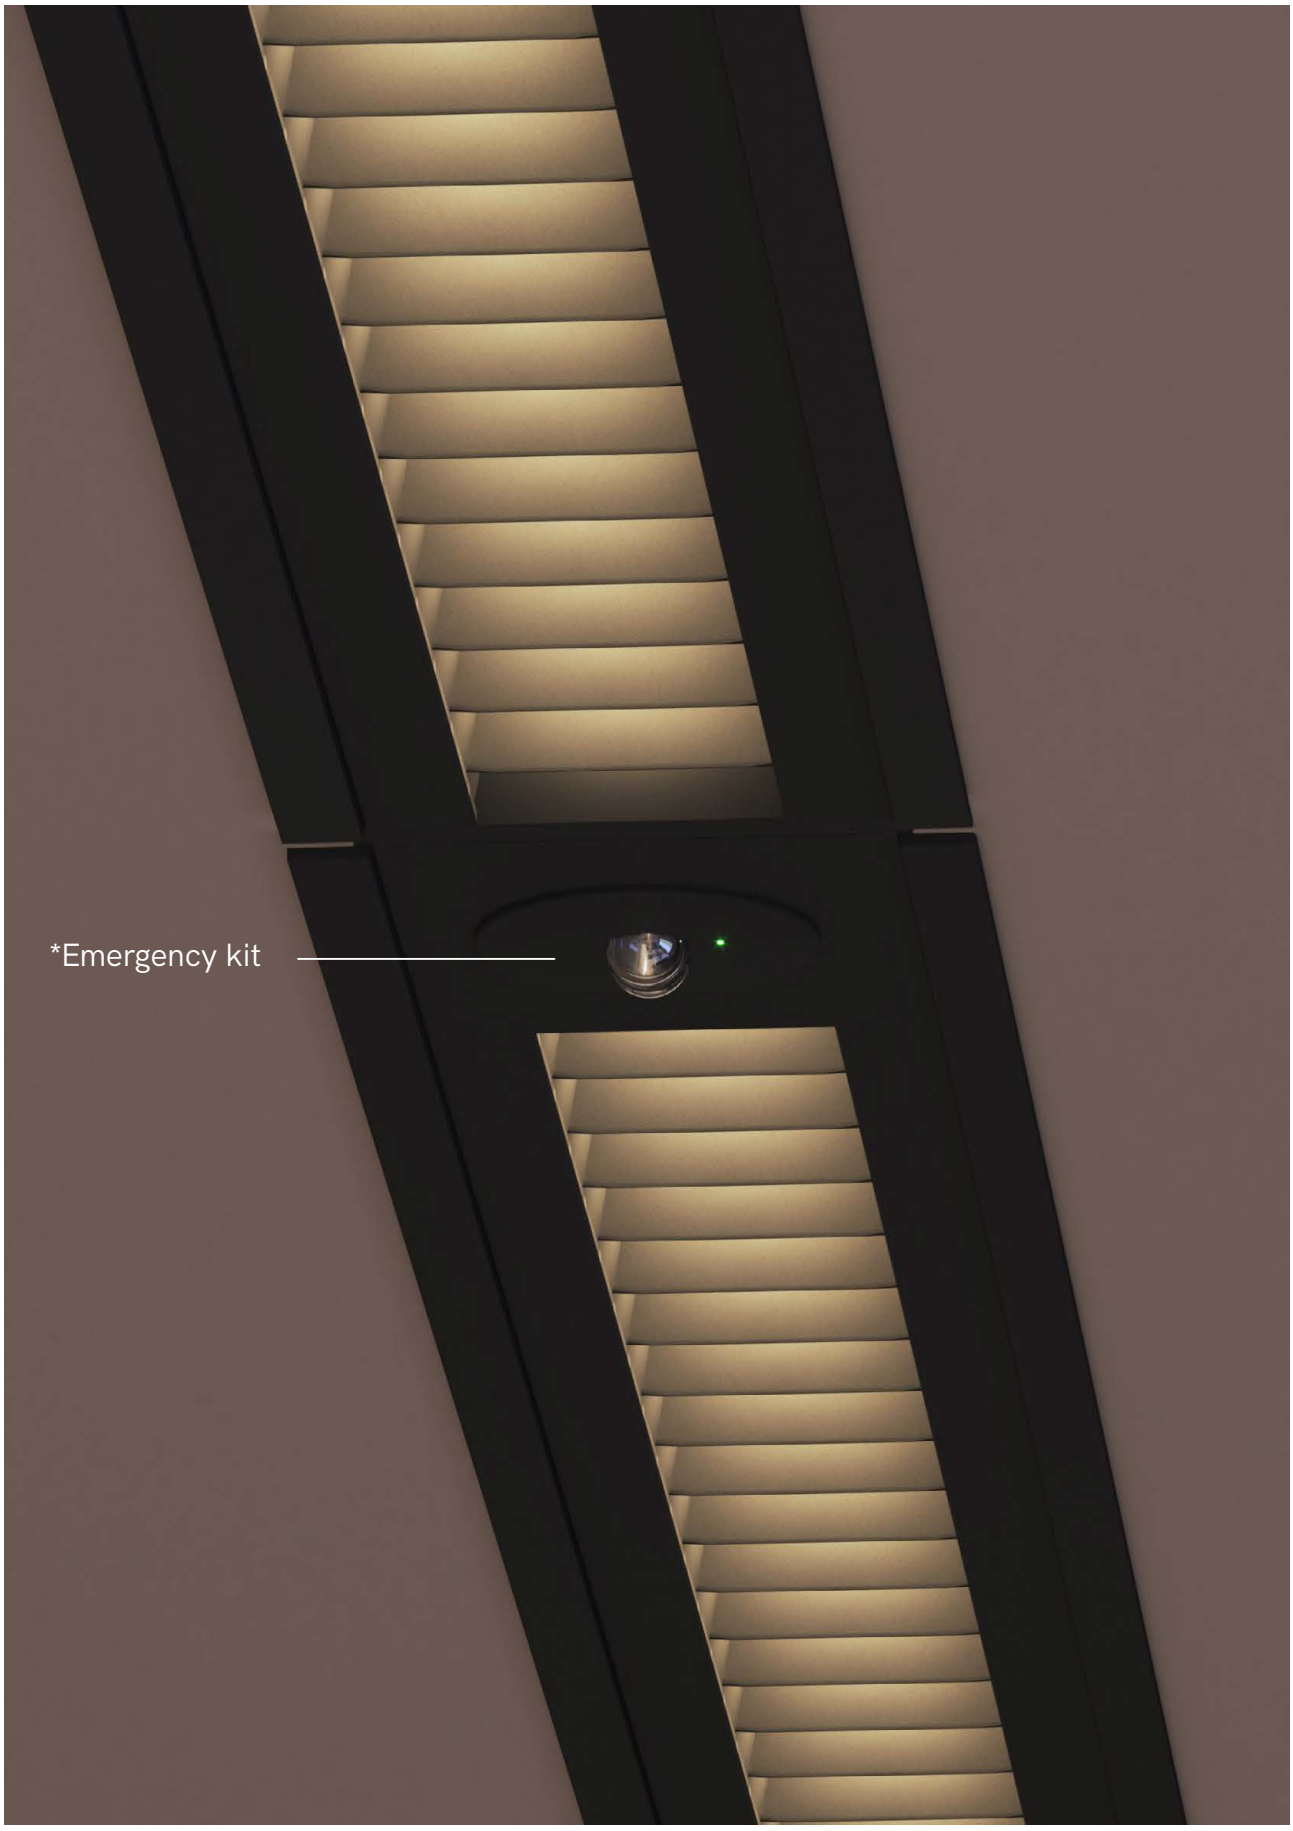


*Optional emergency kit with self-contained luminaire, high luminosity SMD LED with lens ideal for corridors and evacuation routes.

## New

### Urban train E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

### Urban train






*Finished luminaire.
Includes suspension kit, power cable and end caps.

Equipment

Ø60x28mm




Urban train E

Urban train

Control accessories pages 294-307.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 46W / 57W / 69W / 80W | Material | Aluminium |
| Lumens | 4.830 lm - 10.880 lm | PCB | Rigid |
| Installation | Recessed / Pendant | | |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver / Emergency | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Train E | 4 | Black Slats (62°) | 2 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| Train | 6 | Alum. Slats (84°) | 7 | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) | 5 | Casambi | 5 | | |
| | | | | | | N 2.700-5.500K (105 lm/W) | 9 | N Emerg.+ On / Off | K1 | | |
| | | | | | | | | N Emerg.+ Dali | K2 | | |
| | | | | | | | | N Emerg.+ Push | K3 | | |
| | | | | | | | | N Emerg.+ Casambi | K5 | | |

Code:

Emergency 4.000K 200lm | 1/3H.

CE RoHS

Accessories pages 162-163. Consult delivery terms and conditions.
*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



## New

### Urban fly E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

### Urban fly






Equipment

Ø60x28mm




*Finished luminaire. Includes suspension kit, power cable and end caps.

4. 2x14W = 1.130mm

5. 3x14W = 1.690mm

7. 4x14W = 1.130mm

8. 6x14W = 1.690mm

Urban fly E

Urban fly

Control accessories pages 294-307.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 2x14W / 3x14W / 4x14W / 6x14W | Material | Aluminium |
| Lumens | 3.192 lm - 11.424 lm | PCB | Rigid |
| Installation | Recessed / Pendant | | |

| Code | | Diffuser (Angle) | |
|---|---|---|---|
| Fly E | 8 | Optical (50°) | 9 |
| Fly | 6 | | |

| Size | |
|---|---|
| 1.130mm (28W) | 4 |
| 1.690mm (42W) | 5 |
| 1.130mm (56W) | 7 |
| 1.690mm (84W) | 8 |

| CCT (lm/W) | |
|---|---|
| N 2.700K (114 lm/W) | 2 |
| 3.000K (130 lm/W) | 3 |
| 4.000K (136 lm/W) | 4 |

| Driver / Emergency | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| N Emerg.+ On / Off | K1 |
| N Emerg.+ Dali | K2 |
| N Emerg.+ Push | K3 |
| N Emerg.+ Casambi | K5 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |

Code: 9

CE RoHS EAC

Emergency 4.000K 200lm | 1/3H.

Accessories pages 162-163. ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2

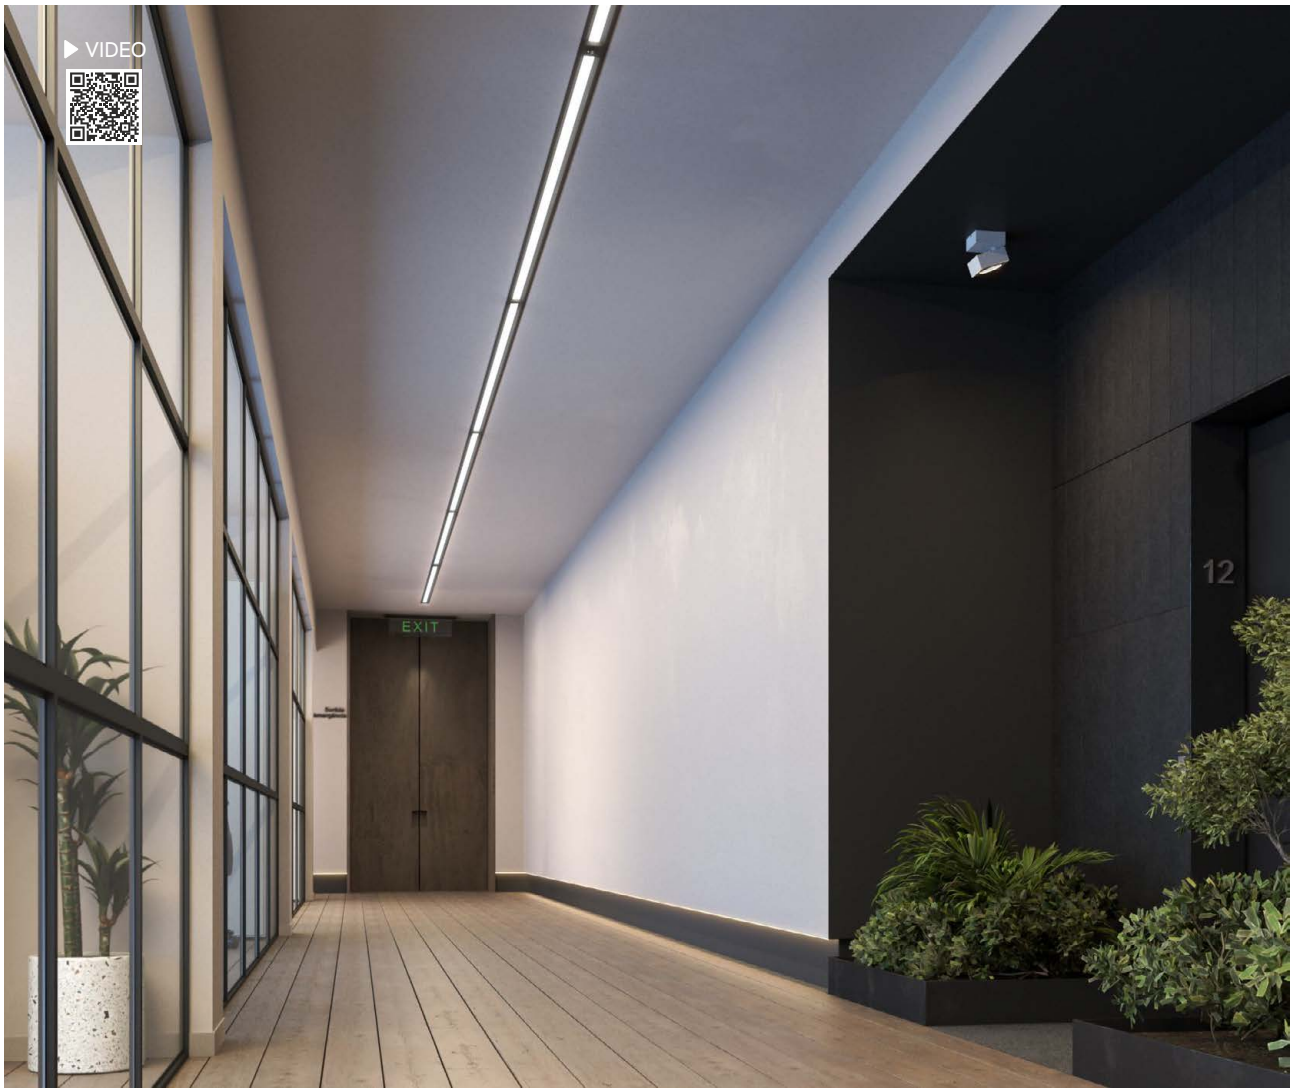
▶ VIDEO
EXIT
12

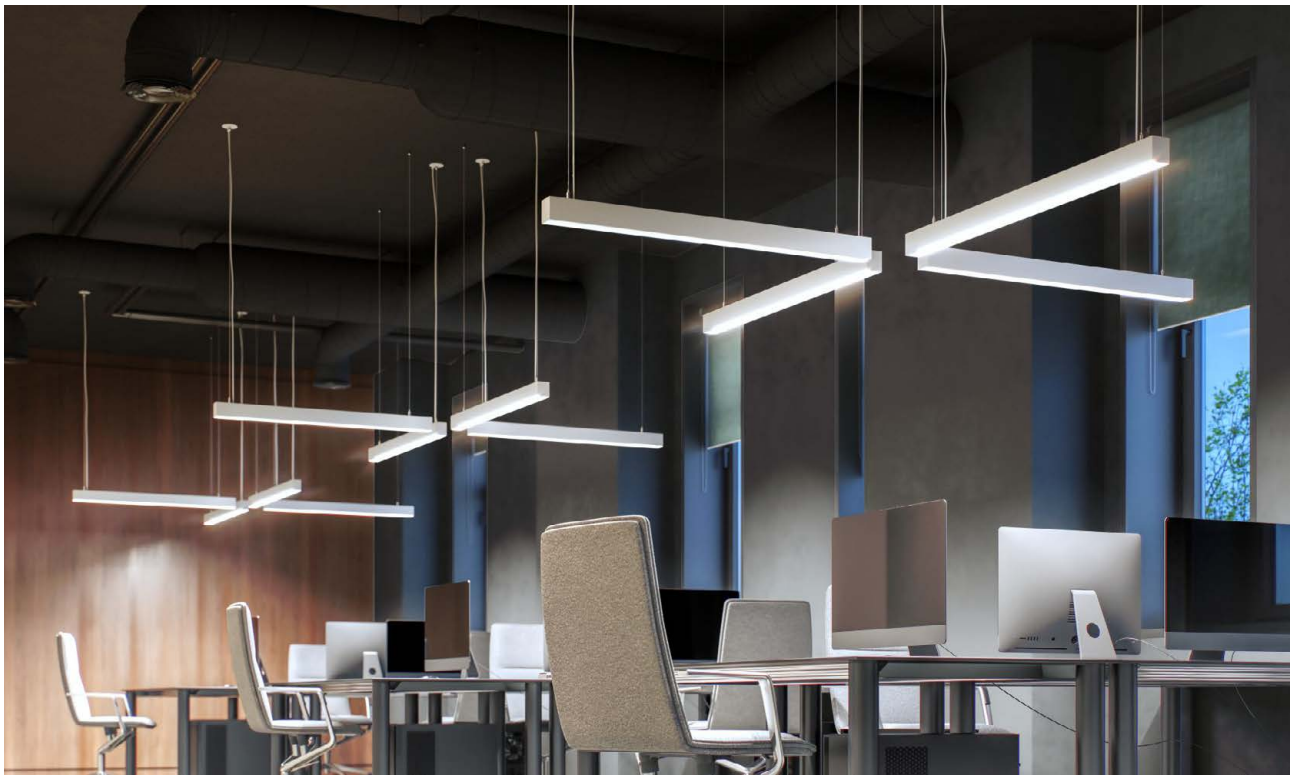

New

## Urban work E






63mm x L

*Finished luminaire.
Includes clips, power cable and end caps.

## Urban work






*Finished luminaire.
Includes suspension kit, power cable and end caps.

### Equipment

Ø60x28mm




Urban work E

Urban work

Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 35W / 43W / 51W / 59W / 97,5W |
| Lumens | 3.675 lm - 11.505 lm |
| Installation | Recessed / Pendant |

| | |
|---|---|
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | |
|---|---|---|---|
| Work E | 7 | Retracted (102°) | 3 |
| Work | 6 | | |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |
| 2.530mm | 7 |

| CCT (lm/W) | |
|---|---|
| 2.700K (105 lm/W) | 2 |
| 3.000K (112 lm/W) | 3 |
| 4.000K (118 lm/W) | 4 |
| 5.000K (118 lm/W) | 5 |
| N 2.700-5.500K (105 lm/W) | 9 |

| Driver / Emergency | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| N Emerg.+ On / Off | K1 |
| N Emerg.+ Dali | K2 |
| N Emerg.+ Push | K3 |
| N Emerg.+ Casambi | K5 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| ⓘ Custom RAL | C |

Code: 3

Emergency 4.000K 200lm | 1/3H.

CE RoHS EAC

Accessories pages 162-163. ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



## New

### Urban asymmetric E






63mm x L

*Spring clips included.

### Urban asymmetric






Urban asymmetric E

Urban asymmetric

Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 25W / 31W / 37W / 43W / 55W |
| Lumens | 1.650 lm - 4.290 lm |
| Installation | Recessed and Surface / Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 56) |

| Code | |
|---|---|
| Asymmetric E | 3 |
| Asymmetric | 6 |

| Diffuser (Angle) | |
|---|---|
| Opal asym. (30°/60°) | 8 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |
| 2.530mm | 7 |

| CCT (lm/W) | |
|---|---|
| 2.700K (66 lm/W) | 2 |
| 3.000K (72 lm/W) | 3 |
| 4.000K (78 lm/W) | 4 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| N Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| N Black (9005) | 2 |
| ⓘ Custom RAL | C |

Code: 8

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

### Common accessories



Joint 180°
40220



Joint 90°
40550

### Urban asymmetric E accessories



End caps
40731
40732

### Urban asymmetric accessories



End caps
40721
40722



Base 3x0,75 (2,5m) Ø60x28mm
40881
40882



Base 5x0,5 (2,5m) Ø60x28mm
40991
40992



Ceiling suspension
40780



Suspension Kit (2m)
40790

CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | PUSH | DALI 2

## Urban wall sensor



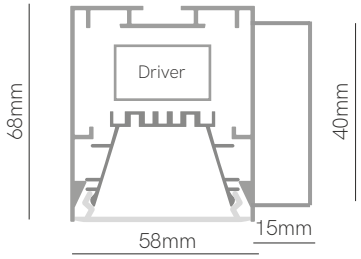


*Finished luminaire. Includes power supply, base wall and end caps.

## Technical Information

| | |
|---|---|
| Power | 21W / 32W / 43W |
| Lumens | 2.352 lm - 5.848 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | Opal (112°) | 1 | 570mm | 1 | 2.700K (112 lm/W) | 2 | PIR | 0 | White (9003) | 1 |
| | | | | 840mm | 2 | 3.000K (128 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 1.130mm | 3 | 4.000K (136 lm/W) | 4 | | | Gray (9006) | 3 |
| | | | | | | 5.000K (136 lm/W) | 5 | | | ⓘ Custom RAL | C |

Code: 6 1 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | 2m 100° | PF >0,9 | CRI ≥95

## Urban track






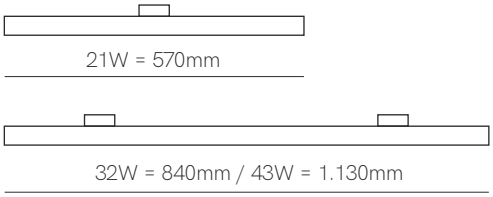


Control accessories pages 294-307.

*Finished luminaire.

## Technical Information

| | |
|---|---|
| Power | 21W / 32W / 43W |
| Lumens | 2.352 lm - 5.848 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 6 | UGR (78°) | 4 | 570mm | 4 | 2.700K (112 lm/W) | 2 | On / Off | 4 | White (9003) | 1 |
| | | Opal (112°) | 5 | 840mm | 6 | 3.000K (128 lm/W) | 3 | Casambi | 6 | Black (9005) | 2 |
| | | | | 1.130mm | 8 | 4.000K (136 lm/W) | 4 | | | ① Custom RAL | C |
| | | | | | | 5.000K (136 lm/W) | 5 | | | | |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | | | | |

Code: 6

CE RoHS EAC

① Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 6 Casambi.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (4) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH



## Urban market






Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 45W / 55,5W / 66W / 76,5W / 97,5W |
| Lumens | 5.040 lm - 13.552 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 2 | Asymmetric (15°/60°) | 1 | 1.130mm | 3 | 3.000K (112 lm/W) | 3 | On / Off | 1 | White (9003) | 1 |
| | | Double asym.(60°/60°) | 2 | 1.410mm | 4 | 4.000K (118 lm/W) | 4 | Dali | 2 | Black (9005) | 2 |
| | | Optical (30°) | 3 | 1.690mm | 5 | MEAT R - 3.200K (86 lm/W) | R | | | Custom RAL | C |
| | | Optical (60°) | 6 | 1.970mm | 6 | HAM - 3.200K (85 lm/W) | X | | | | |
| | | Optical (90°) | 9 | 2.530mm | 7 | MEAT M - 3.500K (84 lm/W) | M | | | | |
| | | | | | | FISH - 6.500K (139 lm/W) | F | | | | |
| | | | | | | FRUIT - 4.200K (123 lm/W) | V | | | | |
| | | | | | | BREAD - 2.700K (131 lm/W) | P | | | | |

Code: 2

Consult delivery terms and conditions.

*Create your code acording to your preferences.

## Accessories



End caps
□ 40721
■ 40722



Joint 180°
■ 40220



Joint 90°
■ 40550



Base 3x0,75 (2,5m)
Ø60x28mm
○ 40881
● 40882



Base 5x0,5 (2,5m)
Ø60x28mm
○ 40991
● 40992



Ceiling suspension
● 40780



Suspension Kit
● 40790 (2m)

CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI 80/93 | 3,37m Max | DALI 2



New

## Quick



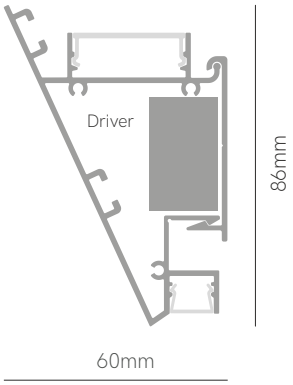


Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 20W / 30W / 41W / 51W / 61W / 71W |
| Lumens | 1.800 lm - 9.656 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Flex / Rigid |

| Code | | Diffuser (Angle) | | Size (Power) | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | Opal (100°) | 8 | 570mm | 1 | Down-Up 2.700K (124 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 850mm | 2 | Down-Up 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.130mm | 3 | Down-Up 4.000K (136 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | 1.410mm | 4 | Down-Up RGB (100 lm/W) | 8 | Casambi | 5 | | |
| | | | | 1.690mm | 5 | Down-Up 1.800-4.000K (90 lm/W) | 9 | Tuya | 7 | | |
| | | | | 1.970mm | 6 | Down 1.800-4.000K Up RGB | C | | | | |
| | | | | | | Down 2.700K Up RGB | D | | | | |
| | | | | | | Down 3.000K Up RGB | T | | | | |
| | | | | | | Down 4.000K Up RGB | Q | | | | |

Code: 4 8

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2


4F
6
5
4
3
2
1
0 RECEPTION

New

## Lift






Equipment

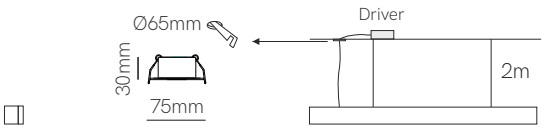


Wall

Pendant

Control accessories pages 294-307.

*Finished luminaire. Includes power cable and end caps.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 33W / 42W / 51W / 59W - 16W / 27W / 35W | Material | Aluminium |
| Lumens | 1.980 lm - 9.440 lm / 1.600 lm - 3.850 lm | PCB | Pendant: Rigid / Wall: Flex |
| Installation | Pendant / Wall | | |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Pendant | 6 | Opal (135°) | 6 | 1.130mm | 3 | 2.700K (150 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.420mm | 4 | 3.000K (155 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.700mm | 5 | 4.000K (160 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | 1.970mm | 6 | RGB-W (60 lm/W) | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (100 lm/W) | 9 | Tuya | 7 | | |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Wall | 6 | Opal (135°) | 0 | 520mm | 1 | 2.700K (100 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 895mm | 2 | 3.000K (105 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 1.145mm | 3 | 4.000K (110 lm/W) | 4 | | | | |

Code: 6

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | tuya | PUSH | DALI 2



New

## Vision






Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 33W / 42W / 51W / 59W |
| Lumens | 1.980 lm - 9.440 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | V |

| Diffuser (Angle) | |
|---|---|
| Opal (90°) | 4 |
| Prismatic (70°) | 6 |
| Low glare black | 9 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (150 lm/W) | 2 |
| 3.000K (155 lm/W) | 3 |
| 4.000K (160 lm/W) | 4 |
| RGB-W (60 lm/W) | 8 |
| 2.700-5.500K (100 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: V

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (9) | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



## Time E






43mm x L

*Spring clips included.

## Time






Time E Time

Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 31W / 46W / 69W |
| Lumens | 3.472 lm - 9.384 lm |
| Installation | Recessed and Surface / Pendant |

| | |
|---|---|
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Time E | 9 |
| Time | 8 |

| Diffuser (Angle) | |
|---|---|
| UGR (81°) | 3 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.690mm | 5 |
| 2.530mm | 7 |

| CCT (lm/W) | |
|---|---|
| 2.700K (112 lm/W) | 2 |
| 3.000K (128 lm/W) | 3 |
| 4.000K (136 lm/W) | 4 |
| 5.000K (136 lm/W) | 5 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Gray (9006) | 3 |
| Custom RAL | C |

Code:

Consult delivery terms and conditions.

*Create your code acording to your preferences.

### Common accessories



Joint 180° 40770
Joint 90° 40990

### Time E accessories



End caps
40751
40752
40753

### Time accessories



End caps
40741
40742
40743



Wall bracket
40851
40852
40853



Trimless
40339



Base 3x0,75 (2,5m) Ø60x28mm
40881
40882
40883



Base 5x0,5 (2,5m) Ø60x28mm
40991
40992
40993



Ceiling suspension
40780



Suspension Kit (2m)
40790

CE RoHS EMC

Accessories pages 162-163.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



## Nexus






Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 46W / 70W |
| Lumens | 4.830 lm - 7.350 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | UGR (81°) | 4 | 1.130mm | 3 | 2.700-5.500K (105 lm/W) | 9 | Casambi | 5 | White (9003) | 1 |
| | | | | 1.690mm | 5 | | | Tuya | 7 | Black (9005) | 2 |
| | | | | | | | | RF Control | 9 | Gray (9006) | 3 |
| | | | | | | | | | | Custom RAL | C |

Code: 4 4 9

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RF included on Driver RF Control.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | tuya | RF



## Dual



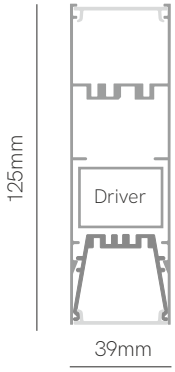


Opal/UGR

## Dual inserted track



Spot not included

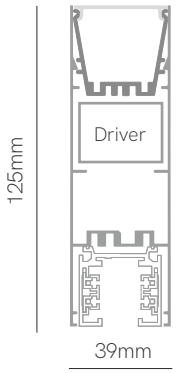


Track/UGR

### Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Dual

Dual inserted track

## Technical Information

| | |
|---|---|
| Power | 18-24W / 28-35W / 46-52W |
| Lumens | Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 5 | Opal/UGR (81°) | 6 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | Track/UGR (81°) | 9 | 1.690mm | 5 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 2.530mm | 7 | 4.000K (136 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | | | 5.000K (136 lm/W) | 5 | Casambi | 5 | | |

Code: 5

RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 | 230 VAC | PF >0,9 | CRI ≥95 | 3,37m Max | PUSH | DALI 2



## Forest






### Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 31W / 38W / 46W / 53W |
| Lumens | 3.255 lm - 7.208 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | |
|---|---|
| Code | 4 |

| Diffuser (Angle) | |
|---|---|
| UGR (81°) | 3 |
| Opal (112°) | 5 |

| Size | |
|---|---|
| 1.155mm | 3 |
| 1.435mm | 4 |
| 1.715mm | 5 |
| 1.995mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (112 lm/W) | 2 |
| 3.000K (128 lm/W) | 3 |
| 4.000K (136 lm/W) | 4 |
| 5.000K (136 lm/W) | 5 |
| 2.700-5.500K (105 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| Wood | 8 |

Code: 4 8

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2



## Time wall sensor






*Finished luminaire. Includes power supply, base wall and end caps.

## Technical Information

| | |
|---|---|
| Power | 15W / 23W / 31W |
| Lumens | 1.680 lm - 4.216 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | Opal (112°) | 1 | 570mm | 1 | 2.700K (112 lm/W) | 2 | PIR | 0 | White (9003) | 1 |
| | | | | 840mm | 2 | 3.000K (128 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 1.130mm | 3 | 4.000K (136 lm/W) | 4 | | | Gray (9006) | 3 |
| | | | | | | 5.000K (136 lm/W) | 5 | | | ⓘ Custom RAL | C |

Code: 8 1 0

CE RoHS EAC

ⓘ Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 2m 100° | 230 VAC | PF >0,9 | CRI ≥95

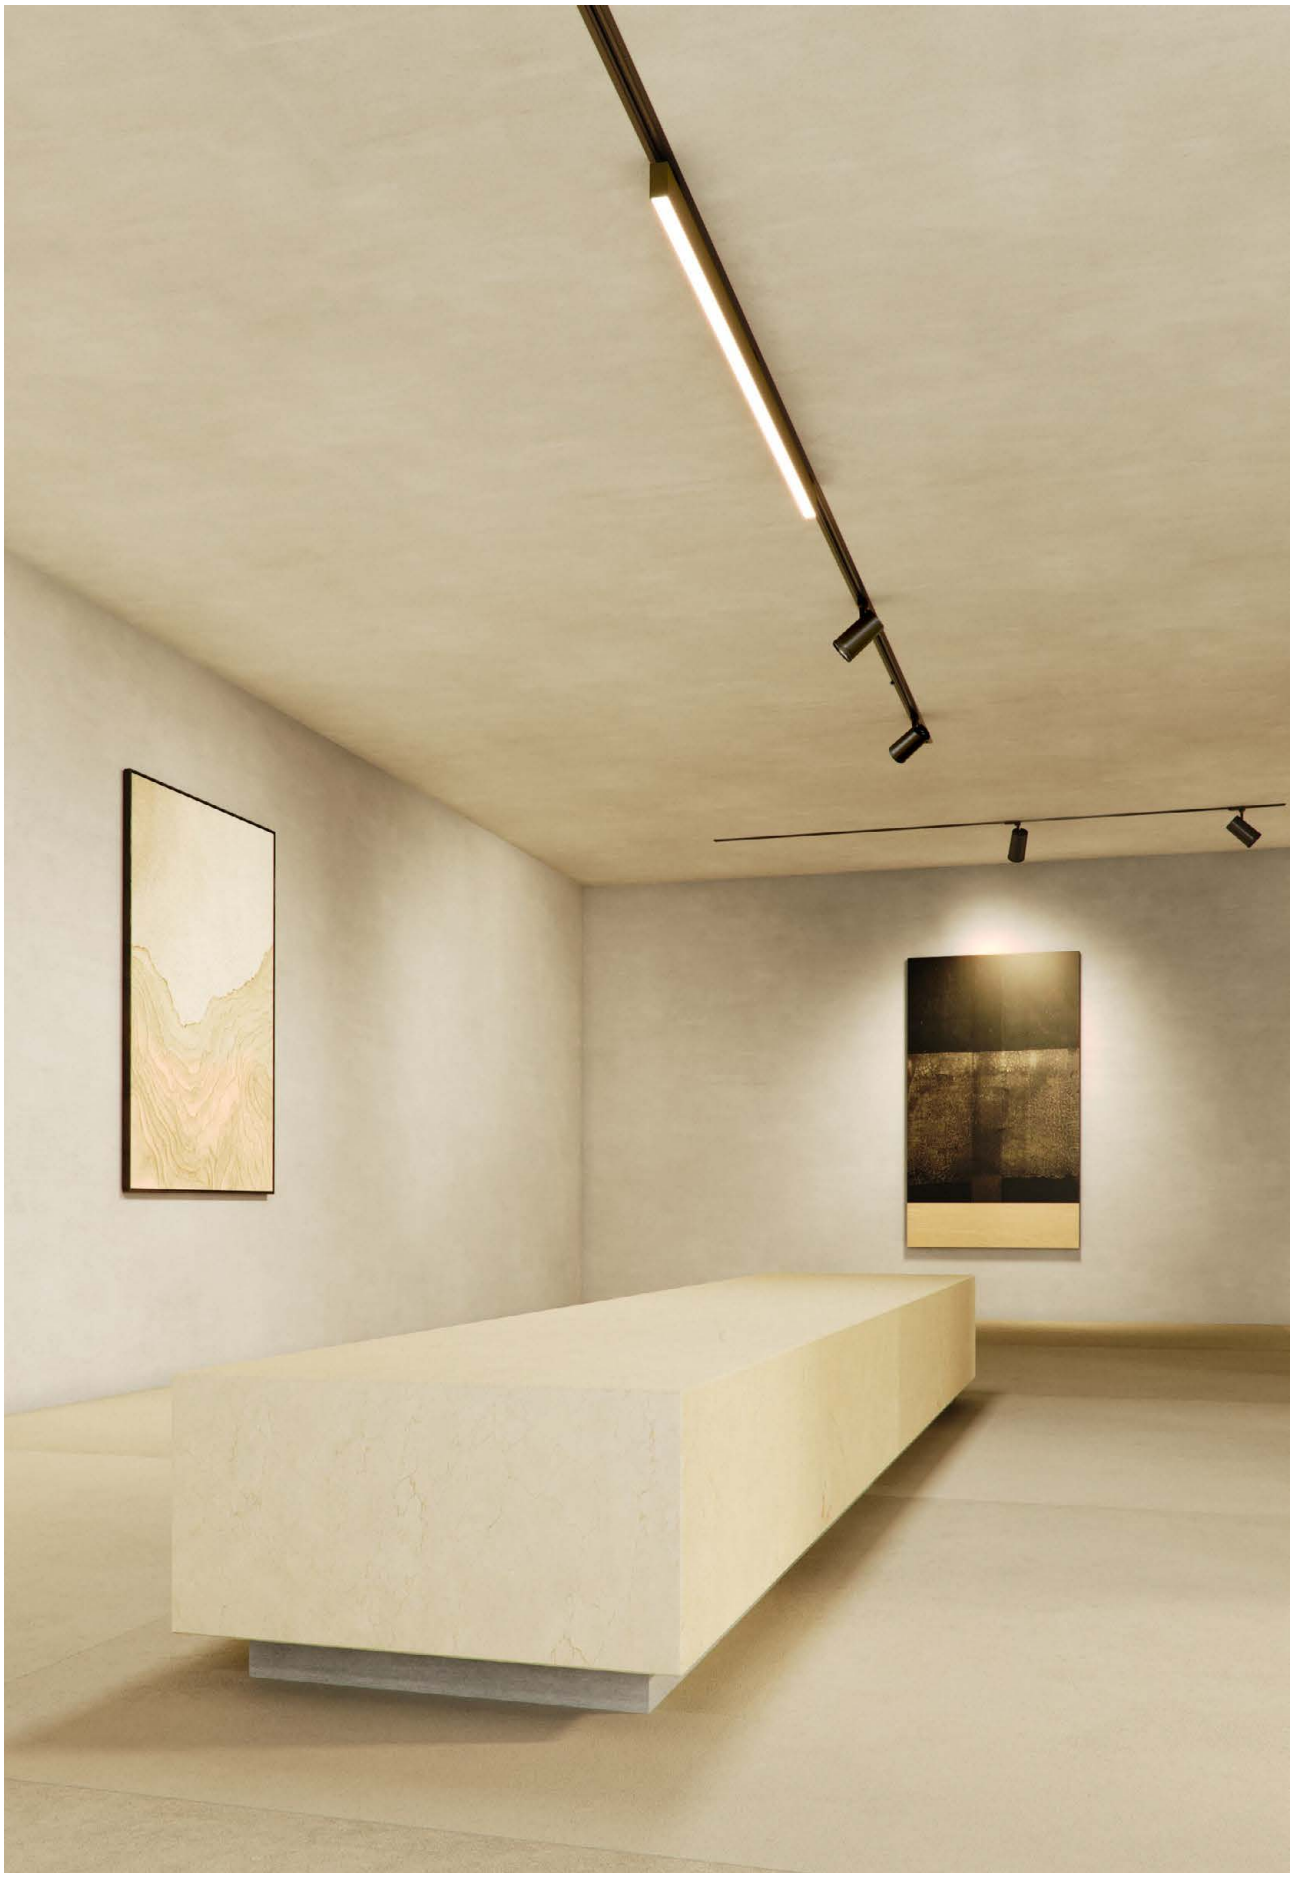

## Time track






### Equipment



15W = 570mm



23W = 840mm / 31W = 1.130mm

Control accessories pages 294-307.

*Finished luminaire.

## Technical Information

| | |
|---|---|
| Power | 15W / 23W / 31W |
| Lumens | 1.680 lm - 4.216 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | UGR (81°) | 3 | 570mm | 4 | 2.700K (112 lm/W) | 2 | On / Off | 4 | White (9003) | 1 |
| | | Opal (112°) | 5 | 840mm | 6 | 3.000K (128 lm/W) | 3 | Casambi | 6 | Black (9005) | 2 |
| | | | | 1.130mm | 8 | 4.000K (136 lm/W) | 4 | | | ⓘ Custom RAL | C |
| | | | | | | 5.000K (136 lm/W) | 5 | | | | |

Code: 8

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | UGR <19 (3) | 230 VAC | PF >0,9 | CRI ≥95



Dental Clinic Eva Flores, El Prat de LLobregat (Spain). Design: Meumstudio.

## Kubo E






*Finished luminaire. Includes driver, spring clips, power cable and end caps.

## Kubo






*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.







Kubo E Kubo

Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 31W / 38W / 46W / 54W |
| Lumens | 3.100 lm - 6.264 lm |
| Installation | Recessed and Surface / Pendant |

| | |
|---|---|
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | |
|---|---|
| Kubo E | 5 |
| Kubo | 7 |

| Diffuser (Angle) | |
|---|---|
| Opal (100°) | 5 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (100 lm/W) | 2 |
| 3.000K (105 lm/W) | 3 |
| 4.000K (111 lm/W) | 4 |
| 5.000K (116 lm/W) | 5 |
| RGB-W (100 lm/W) | 8 |
| 2.700-5.500K (105 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 5

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | Max Kubo 3,37m Kubo E 2m | tuya | PUSH | DALI


VIDEO

## Mirrow









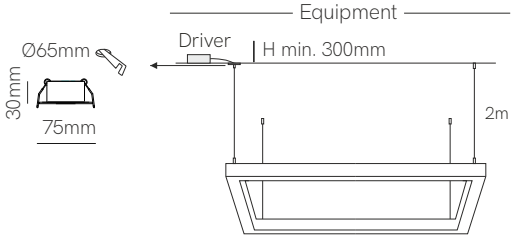


Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 53W / 80W |
| Lumens | 5.300 lm - 8.880 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 7 | Opal (100°) | 8 | 595x595mm | 2 | 2.700K (100 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.195x595mm | 9 | 3.000K (105 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | | | 4.000K (111 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | | | RGB-W (100 lm/W) | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | | |

Code: 7 8

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2


MATRIX
MATRIX
▶ VIDEO

## Tax








600x600x600mm / 840x840x840mm

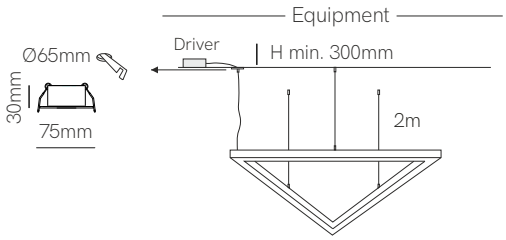


Control accessories pages 294-307.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 39W / 55W |
| Lumens | 3.900 lm - 6.105 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid / RGB-W Flex |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 7 | Opal (100°) | 2 | 600mm | 4 | 2.700K (100 lm/W) | 2 | On / Off | 1 | △ White (9003) | 1 |
| | | | | 840mm | 8 | 3.000K (105 lm/W) | 3 | Dali | 2 | ▲ Black (9005) | 2 |
| | | | | | | 4.000K (111 lm/W) | 4 | Push | 3 | ⓘ Custom RAL | C |
| | | | | | | RGB-W (100 lm/W) | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | | |

Code: 7 2

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | PUSH | DALI 2

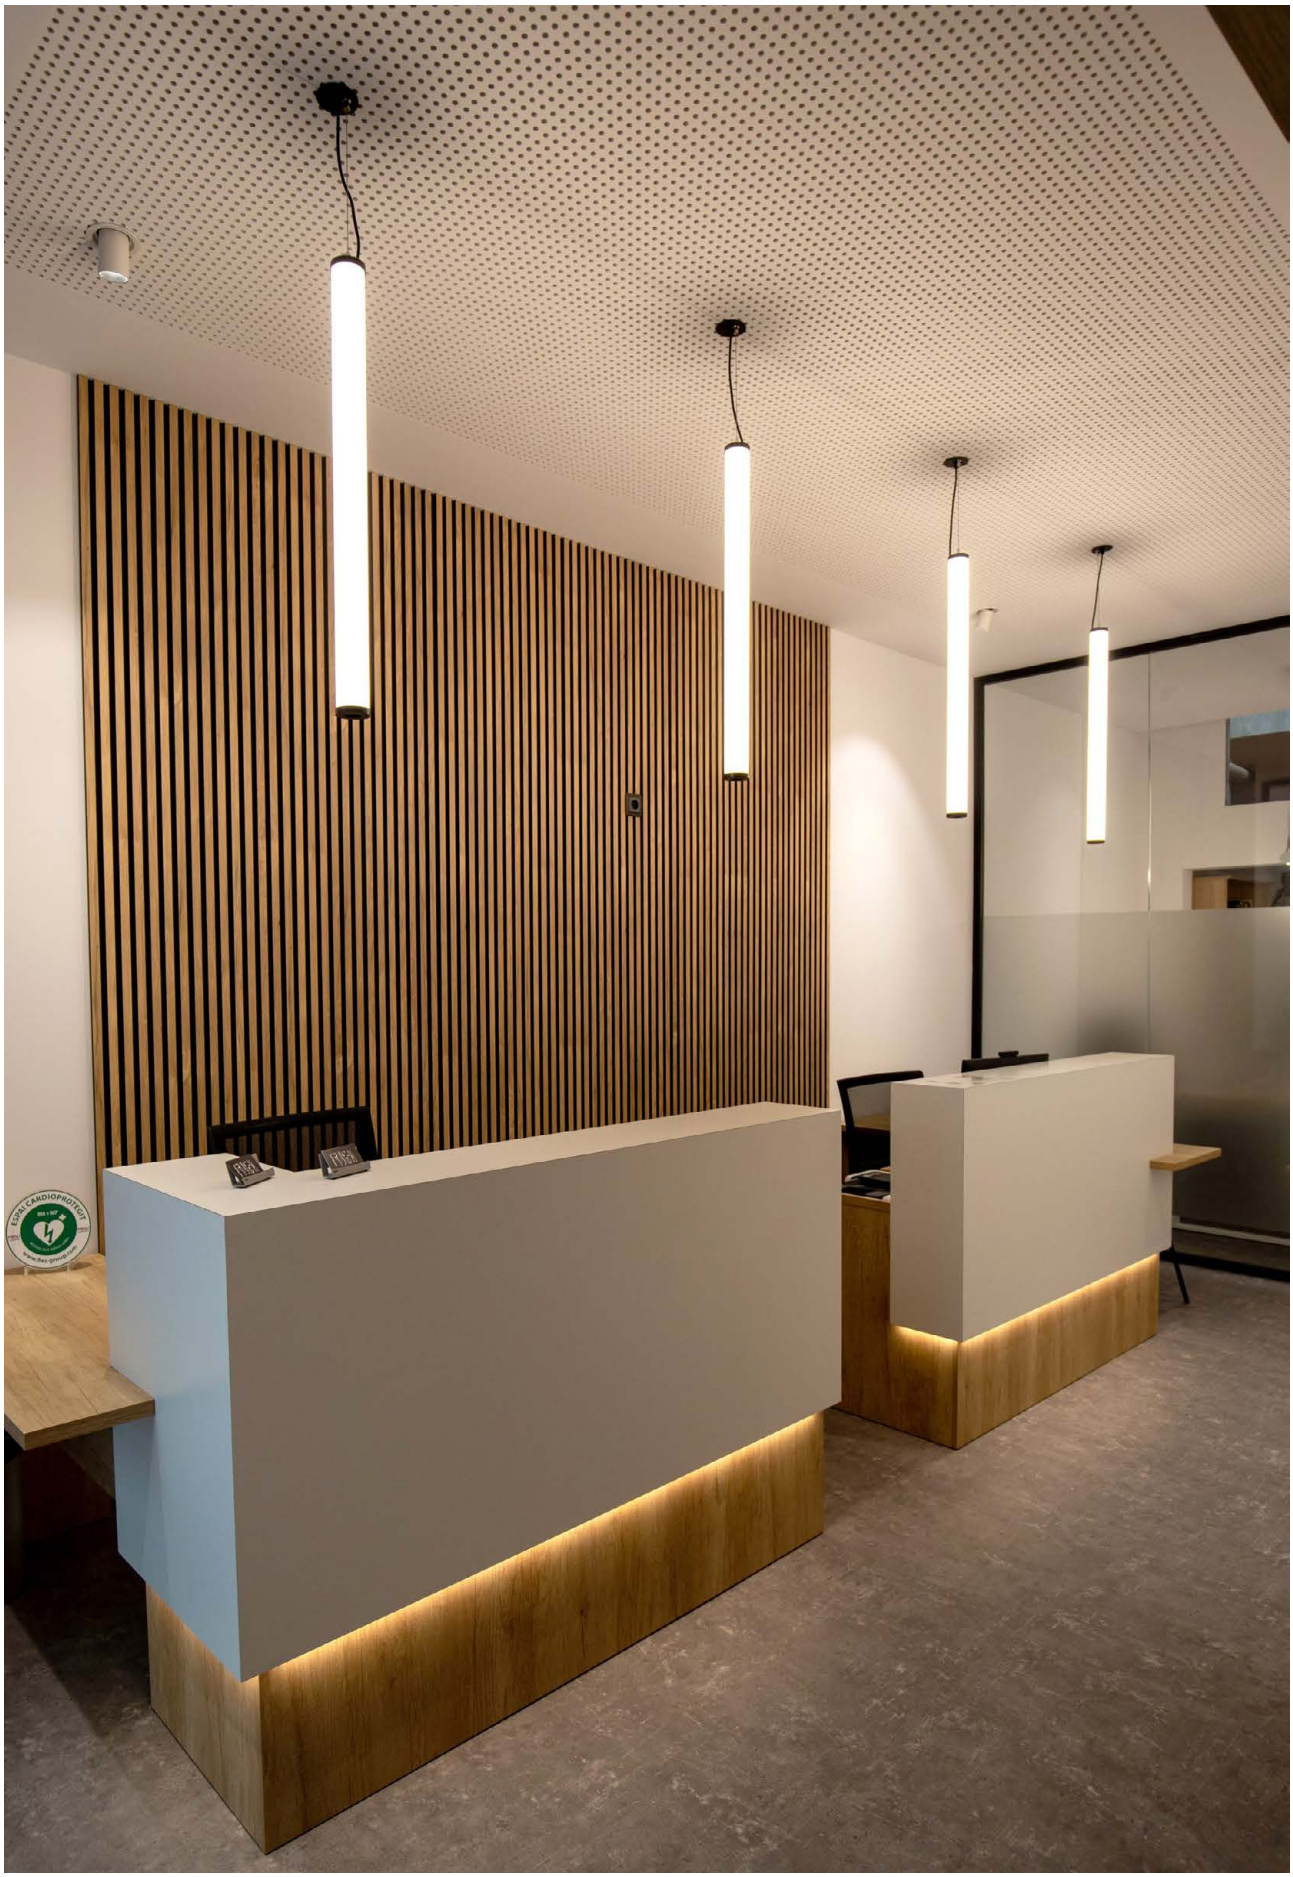

Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié il·luminació. Architecture: Pablo Amorós.

## Filter






### Equipment

Code **30** recessed driver




Code **37** surface driver




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 32W - 120W |
| Lumens | 3.200 lm - 13.320 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Flex (Fine 48 / Fine 54) |

| Code / Diffuser (Angle) | |
|---|---|
| N Recessed Opal (360°) | **30** |
| Surface Opal (360°) | **37** |

| Size | |
|---|---|
| 800mm | **3** |
| 1.200mm | **5** |
| 1.600mm | **7** |
| 2.000mm | **9** |

| CCT (lm/W) | |
|---|---|
| 2.700K (100 lm/W) | **2** |
| 3.000K (105 lm/W) | **3** |
| 4.000K (111 lm/W) | **4** |
| RGB (58 lm/W) | **7** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Push | **3** |
| Casambi | **5** |
| Tuya | **7** |

| Colour | |
|---|---|
| White (9003) | **1** |
| Black (9005) | **2** |
| Custom RAL | **C** |

Code: 7

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié l'il·luminació. Architecture: Pablo Amorós.

## Tubi






### Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps (aluminium).

### Technical Information

| | |
|---|---|
| Power | 35W / 44W / 53W / 62W |
| Lumens | 3.500 lm - 8.432 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 7 | Opal (270°) | 1 | 1.130mm | 3 | 2.700K (100 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.000K (136 lm/W) | 5 | Casambi | 5 | | |
| | | | | | | RGB-W (100 lm/W) | 8 | Tuya | 7 | | |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | | | | |

Code: 7 1

CE RoHS

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI 2



## Tubi wall



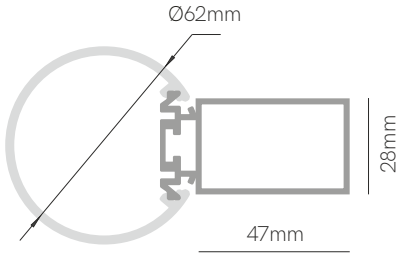


Control accessories pages 294-307.

*Finished luminaire. Includes base wall and end caps (aluminium).

## Technical Information

| | |
|---|---|
| Power | 35W / 44W / 53W |
| Lumens | 3.500 lm - 5.883 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 7 | Opal (270°) | 9 | 1.130mm | 3 | 2.700K (100 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (105 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (111 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | | | RGB-W (100 lm/W) | 8 | Casambi | 5 | | |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | | |

Code: 7 9

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI 2


M-AUDIO

## Grip



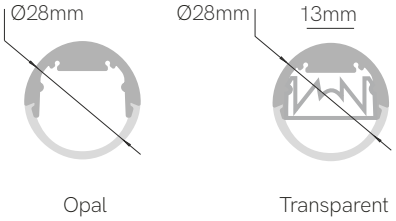


### Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 26W / 33W / 39W / 46W |
| Lumens | 2.522 lm - 4.968 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 52) |

| Code | |
|---|---|
| Code | 2 |

| Diffuser (Angle) | |
|---|---|
| Opal (100°) | 4 |
| Transparent (30°) | 8 |

| Size | |
|---|---|
| 1.130mm | 3 |
| 1.410mm | 4 |
| 1.690mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (97 lm/W) | 2 |
| 3.000K (103 lm/W) | 3 |
| 4.000K (108 lm/W) | 4 |
| RGB (100 lm/W) | 8 |
| 2.700-5.500K (105 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| Black (9005) | 2 |
| Custom RAL | C |

Code: 2

CE RoHS EMC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2

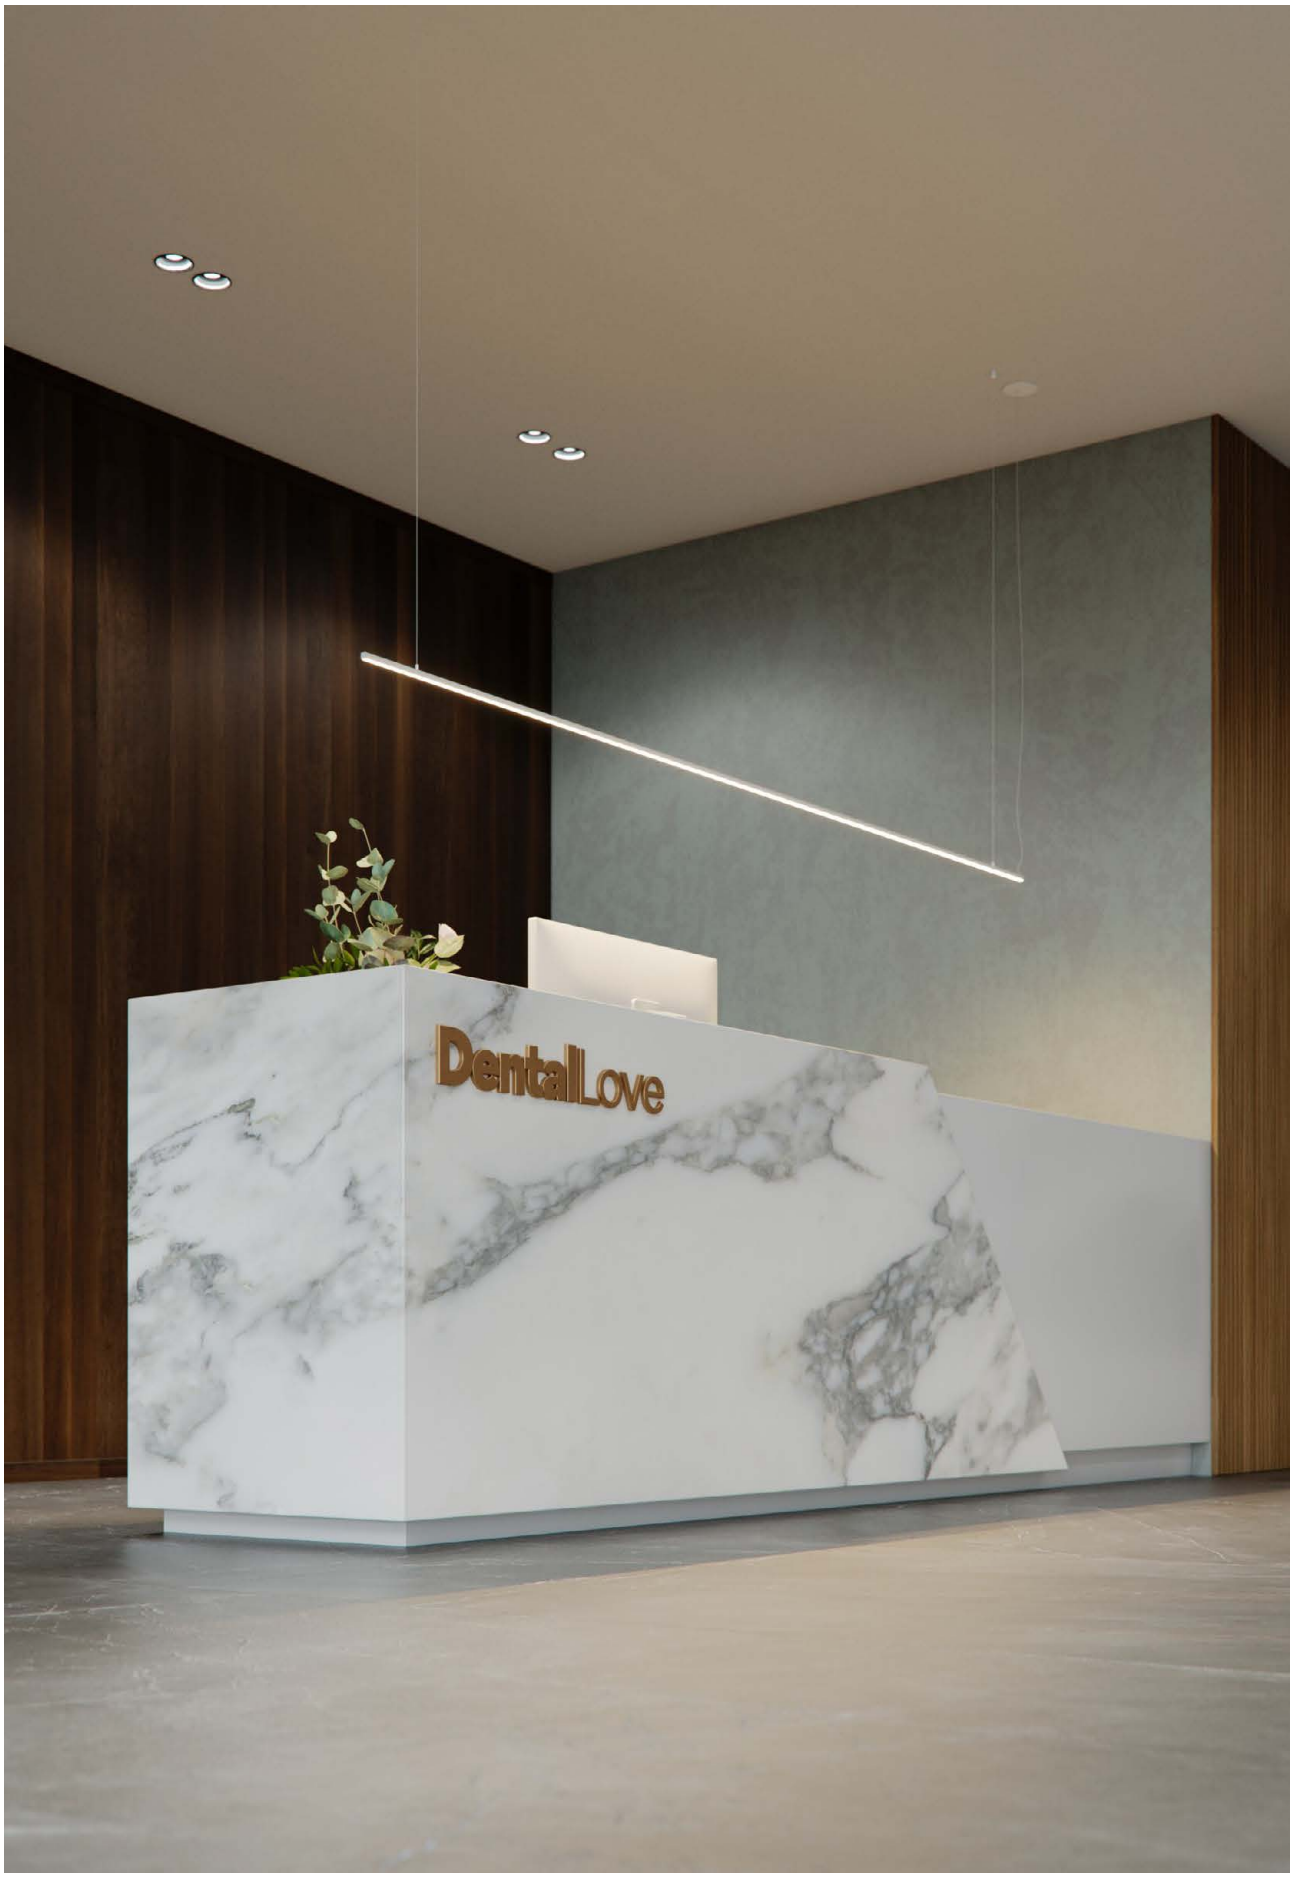
DentalLove

## Nyneto






Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 16W / 20W / 24W / 28W |
| Lumens | 896 lm - 1.848 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 88) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 8 | Opal (100°) | 8 | 1.120mm | 3 | 2.700K (56 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (61 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (66 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 6 | | | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 8 8

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2



## Minimus






### Equipment

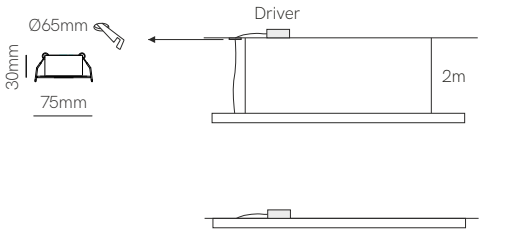


Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 25W / 31W / 37W / 43W |
| Lumens | 2.425 lm - 4.644 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 52) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 5 | Opal prism (100°) | 8 | 1.170mm | 2 | 2.700K (97 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.420mm | 4 | 3.000K (103 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.720mm | 6 | 4.000K (108 lm/W) | 4 | Push | 3 | Custom RAL | C |
| | | | | 1.970mm | 8 | | | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 5 8

CE RoHS

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 1,97m Max | tuya | PUSH | DALI 2




▶ VIDEO

## Dau E






*Finished luminaire. Includes power supply, spring clips, power cable and end caps.

## Dau






*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.







Dau E Dau

Control accessories pages 294-307.

## Technical Information

| | |
|---|---|
| Power | 18W / 23W / 26W / 30W |
| Lumens | 1.800 lm - 3.420 lm |
| Installation | Recessed and Surface / Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 61) |

| Code / Diffuser (Angle) | | |
|---|---|---|
| Dau E | Opal (110°) | 16 |
| Dau | Opal (110°) | 15 |

| Size | |
|---|---|
| 1.170mm | 3 |
| 1.420mm | 4 |
| 1.720mm | 5 |
| 1.970mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (100 lm/W) | 2 |
| 3.000K (105 lm/W) | 3 |
| 4.000K (111 lm/W) | 4 |
| 5.000K (114 lm/W) | 5 |
| RGB-W (100 lm/W) | 8 |
| 2.700-5.500K (105 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code:

CE RoHS

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥95 | 2m Max | tuya | PUSH | DALI



## Square








530 x 530mm



530 x 1.030mm

Equipment




Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 43W / 62W |
| Lumens | 4.300 lm - 6.882 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 61) |

| Code | | Diffuser (Angle) | |
|---|---|---|---|
| Code | 3 | Opal (110°) | 3 |

| Size | |
|---|---|
| 530 x 530mm | 4 |
| 530 x 1.030mm | 8 |

| CCT (lm/W) | |
|---|---|
| 2.700K (100 lm/W) | 2 |
| 3.000K (105 lm/W) | 3 |
| 4.000K (111 lm/W) | 4 |
| RGB-W (100 lm/W) | 8 |
| 2.700-5.500K (105 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 4 |
| Silver | 5 |
| Custom RAL | C |

Code: 3 3

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | 2m Max | tuya | PUSH | DALI 2

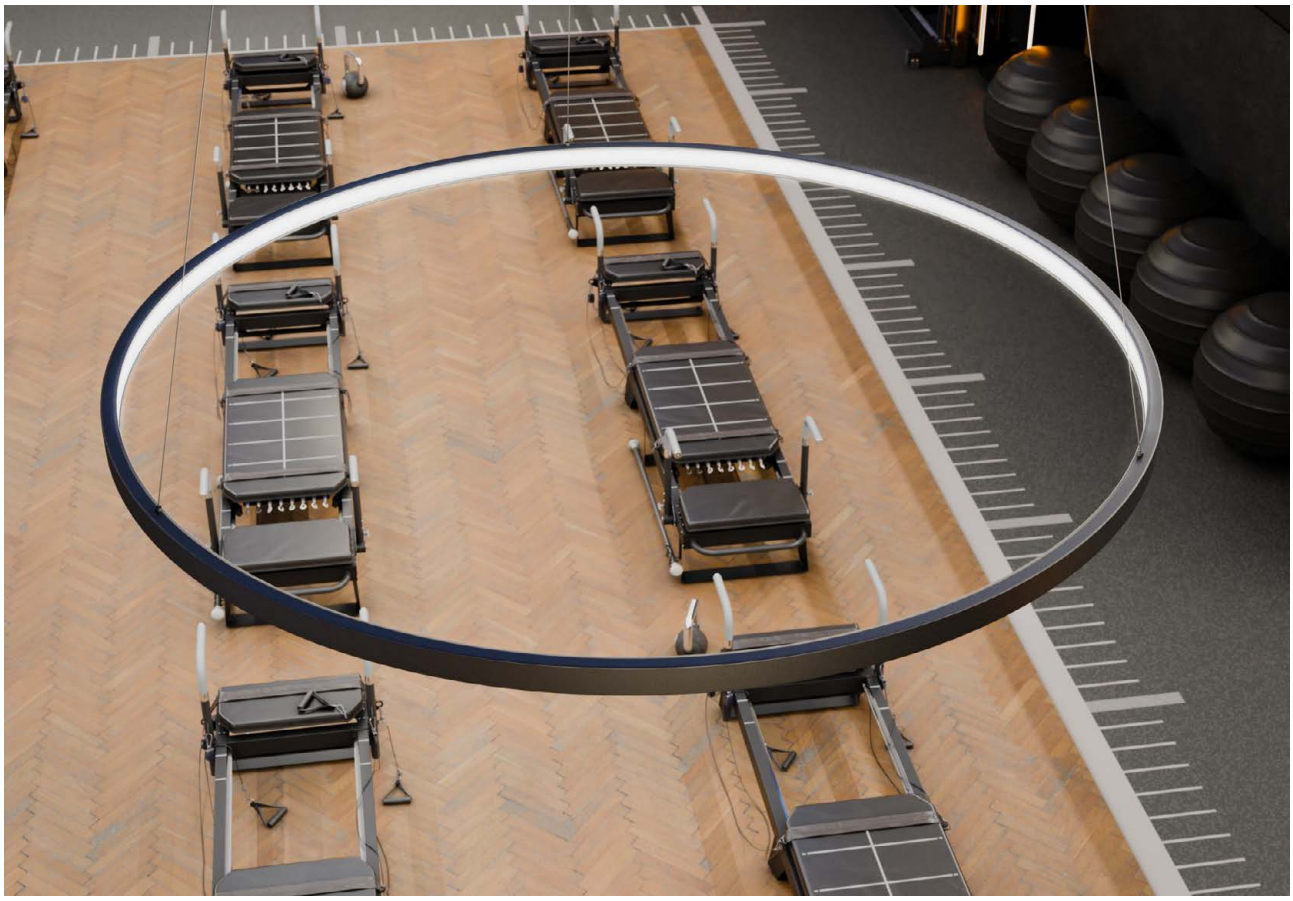



New

## Zero in XL






Ø400/700/1.000mm
Tolerance ±10%



Equipment

Ø250/280x41mm




Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

### Technical Information

| | |
|---|---|
| Power | 37W / 65W / 94W |
| Lumens | 2.220 lm - 15.040 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 30) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 9 | Opal (100°) | 1 | 400mm | 1 | 2.700K (150 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 2 | 3.000K (155 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 9 | 4.000K (160 lm/W) | 4 | Push | 3 | Matt Gold | 4 |
| | | | | | | RGB-W (60 lm/W) | 7 | Casambi | 5 | Silver | 5 |
| | | | | | | 2.700-5.500K (100 lm/W) | 9 | Tuya | 7 | Custom RAL | C |

Code: 9 1

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Zero out XL






Ø400/700/1.000mm
Tolerance ±10%



Equipment

Ø250/280x41mm




Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

### Technical Information

| | |
|---|---|
| Power | 37W / 65W / 94W |
| Lumens | 2.220 lm - 15.040 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 30) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 9 | Opal (100°) | 2 | 400mm | 1 | 2.700K (150 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 2 | 3.000K (155 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 9 | 4.000K (160 lm/W) | 4 | Push | 3 | Matt Gold | 4 |
| | | | | | | RGB-W (60 lm/W) | 7 | Casambi | 5 | Silver | 5 |
| | | | | | | 2.700-5.500K (100 lm/W) | 9 | Tuya | 7 | Custom RAL | C |

Code: 9 2

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



## Zero in

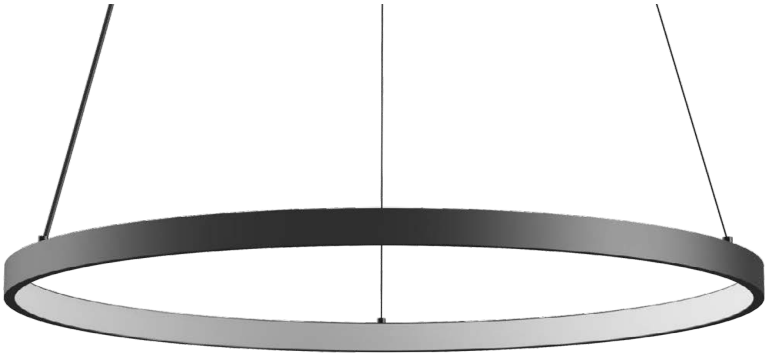




Ø400/700/1.000/1.400mm
Tolerance ±10%



Equipment

Ø250/280/330x41mm




Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W / 96W |
| Lumens | 1.560 lm - 6.912 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 56) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (100°) | 2 | 400mm | 2 | 2.700K (60 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 4 | 3.000K (66 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) | 4 | Push | 3 | ⓘ Matt Gold | 4 |
| | | | | ⓘ 1.400mm | 8 | RGB-W (50 lm/W) | 8 | Casambi | 5 | ⓘ Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) | 9 | Tuya | 7 | ⓘ Custom RAL | C |

Code: 1 2

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



## Zero out






Ø400/700/1.000/1.400mm
Tolerance ±10%



Equipment

Ø250/280/330x41mm




Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W / 96W |
| Lumens | 1.560 lm - 6.912 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 56) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (100°) | 4 | 400mm | 2 | 2.700K (60 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 700mm | 4 | 3.000K (66 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) | 4 | Push | 3 | ⓘ Matt Gold | 4 |
| | | | | ⓘ 1.400mm | 8 | RGB-W (50 lm/W) | 8 | Casambi | 5 | ⓘ Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) | 9 | Tuya | 7 | ⓘ Custom RAL | C |

Code: 1 4

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Circus in XL



New

## Circus out XL









Equipment

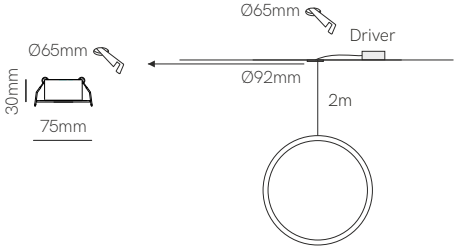





Circus in XL

Circus out XL

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 37W / 65W / 94W |
| Lumens | 2.220 lm - 15.040 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 30) |

| Code | |
|---|---|
| Code | 9 |

| Diffuser (Angle) | |
|---|---|
| IN Opal (100°) | 0 |
| OUT Opal (100°) | 8 |

| Size | |
|---|---|
| 400mm | 2 |
| 700mm | 4 |
| 1.000mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (150 lm/W) | 2 |
| 3.000K (155 lm/W) | 3 |
| 4.000K (160 lm/W) | 4 |
| RGB-W (60 lm/W) | 7 |
| 2.700-5.500K (100 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 4 |
| Silver | 5 |
| Custom RAL | C |

Code: 9

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Circus in



## Circus out



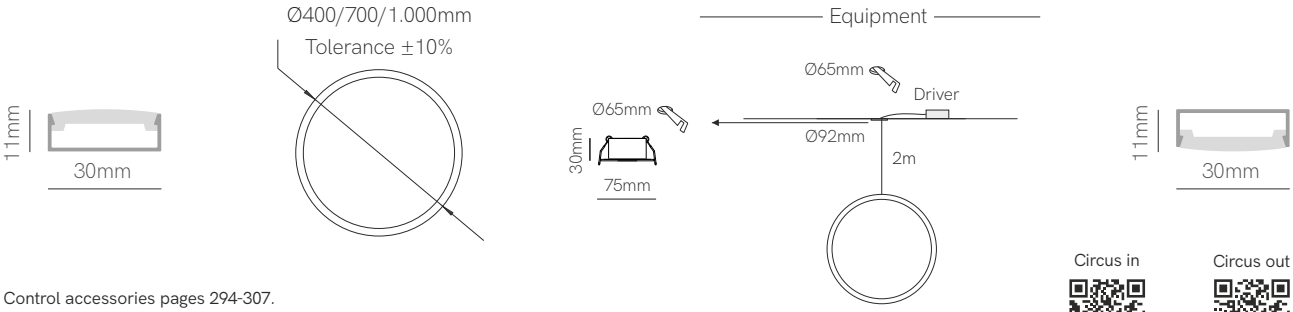


Circus in

Circus out

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 26W / 44W / 63W |
| Lumens | 1.300 lm - 4.536 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Flex (Fine 56) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | IN Opal (100°) | 0 | 400mm | 2 | 2.700K (60 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | N OUT Opal (100°) | 1 | 700mm | 4 | 3.000K (66 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.000mm | 6 | 4.000K (72 lm/W) | 4 | Push | 3 | Matt Gold | 4 |
| | | | | | | RGB-W (50 lm/W) | 8 | Casambi | 5 | Silver | 5 |
| | | | | | | 2.700-5.500K (70 lm/W) | 9 | Tuya | 7 | Custom RAL | C |

Code: 1

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2





## Tundra



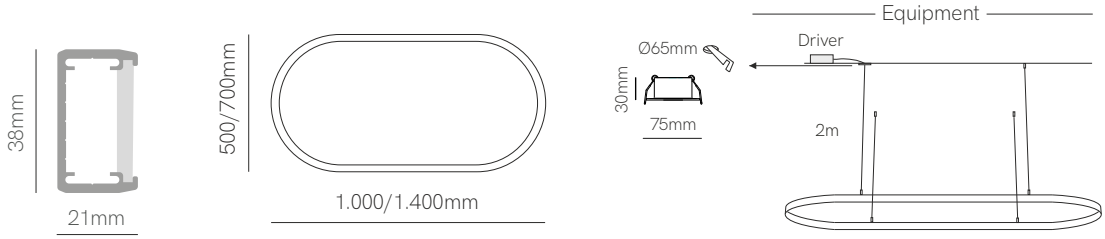


Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 77W / 112W |
| Lumens | 3.850 lm - 8.064 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 30) |

| Code | | Diffuser (Angle) | |
|---|---|---|---|
| Code | 8 | Opal (100°) | 6 |

| Size | |
|---|---|
| 500 x 1.000mm | 4 |
| 700 x 1.400mm | 6 |

| CCT (lm/W) | |
|---|---|
| 2.700K (60 lm/W) | 2 |
| 3.000K (66 lm/W) | 3 |
| 4.000K (72 lm/W) | 4 |
| RGB-W (50 lm/W) | 8 |
| 2.700-5.500K (70 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 4 |
| Silver | 5 |
| Custom RAL | C |

Code: 8 6

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



## Zero direct XL



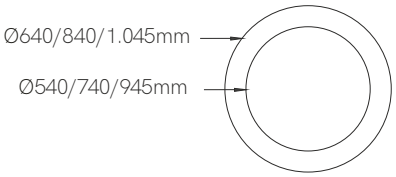


Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

### Technical Information

| | |
|---|---|
| Power | 78W / 105W / 131W |
| Lumens | 5.382 lm - 10.349 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (100°) | 3 | 640mm | 2 | 2.700K (69 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 840mm | 5 | 3.000K (75 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.045mm | 6 | 4.000K (79 lm/W) | 4 | Push | 3 | Gray (9006) | 3 |
| | | | | | | | | Casambi | 5 | | |

Code: 1 3

CE RoHS EMC

*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2



Connecta Fisioteràpia i Salut, Barcelona (Spain).

## Zero direct






Ø520/800/1.200/1.500/3.000mm

Tolerance ±10%



Equipment

Ø250/280x41mm




Ø520/800/1.200/1.500mm

Ø80x29mm




Ø3.000mm

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 35W / 55W /75W / 94W / 189W |
| Lumens | 2.310 lm - 14.742 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 56) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (100°) | 7 | 520mm | 0 | 2.700K (66 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 800mm | 2 | 3.000K (72 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.200mm | 6 | 4.000K (78 lm/W) | 4 | Push | 3 | Matt Gold | 4 |
| | | | | 1.500mm | 8 | 2.700-5.500K (70 lm/W) | 9 | Casambi | 5 | Silver | 5 |
| | | | | 3.000mm | 9 | | | Tuya | 7 | Custom RAL | C |
| | | | | Custom | C | | | | | | |

Code: 1 7

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

# Zero design

## Zero 45°

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal (100°) | 1 | 800mm | 1 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | 1.500mm | 4 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | 3.000mm | 7 | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |

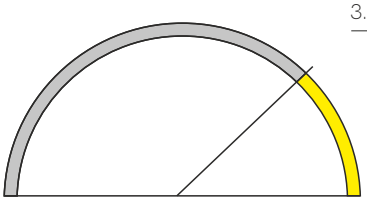

800 - 1.500 - 3.000mm
Tolerance ±10%

Code: Z 1 0

## Zero 90°

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal (100°) | 1 | 800mm | 2 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | 1.500mm | 5 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |

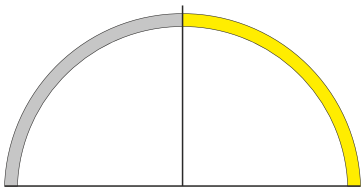

800 - 1.500mm
Tolerance ±10%

Code: Z 1 0

## Zero 90°

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | Z | Opal (100°) | 1 | Extern (1.500mm) | 3 | 2.700K (66 lm/w) - 22W/m | 2 | 24VDC | 0 | White (9003) | 1 |
| | | | | Intern (1.500mm) | 6 | 3.000K (72 lm/w) - 22W/m | 3 | | | Black (9005) | 2 |
| | | | | | | 4.000K (78 lm/w) - 22W/m | 4 | | | ⓘ Matt Gold | 4 |
| | | | | | | CCT (70 lm/w) - 22W/m | 9 | | | ⓘ Silver | 5 |
| | | | | | | | | | | ⓘ Custom RAL | C |

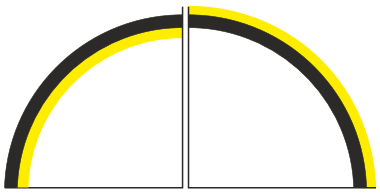

1.500mm
Tolerance ±10%

Code: Z 1 0

CE RoHS EMC

Control accessories pages 294-307.

ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC

## Zero 180°

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | **Z** | Opal (100°) | **1** | 800mm | **8** | 2.700K (66 lm/w) - 22W/m | **2** | 24VDC | **0** | White (9003) | **1** |
| | | | | 1.500mm | **9** | 3.000K (72 lm/w) - 22W/m | **3** | | | Black (9005) | **2** |
| | | | | | | 4.000K (78 lm/w) - 22W/m | **4** | | | ⓘ Matt Gold | **4** |
| | | | | | | CCT (70 lm/w) - 22W/m | **9** | | | ⓘ Silver | **5** |
| | | | | | | | | | | ⓘ Custom RAL | **C** |

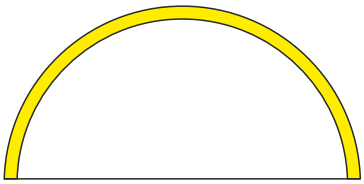

800 - 1.500mm
Tolerance ±10%

Code: **Z** **1** _ _ **0** _

## Zero line

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) - Power/m | | Voltage | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | **Z** | Opal (100°) | **1** | 2.500mm | **0** | 2.700K (66 lm/w) - 22W/m | **2** | 24VDC | **0** | White (9003) | **1** |
| | | | | | | 3.000K (72 lm/w) - 22W/m | **3** | | | Black (9005) | **2** |
| | | | | | | 4.000K (78 lm/w) - 22W/m | **4** | | | ⓘ Matt Gold | **4** |
| | | | | | | CCT (70 lm/w) - 22W/m | **9** | | | ⓘ Silver | **5** |
| | | | | | | | | | | ⓘ Custom RAL | **C** |



2.500mm

Code: **Z** **1** _ _ **0** _




ⓘ On demand.

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver Casambi and Tuya.. Accessories on page 162-163.

### Accessories



End Cap
- ☐ 40631
- ■ 40632
- ■ 40634
- ■ 40635



Suspension Kit Metallic (2m)
- ● 34720
- ○ 34721
- ● 34722



Ceiling suspension
- ■ 40430



Kit Joint Metallic
- ■ 40490
- ☐ 40491
- ■ 40492

CE RoHS EMC

Control accessories pages 294-307.

ⓘ Consult delivery terms and conditions.

*Create your luminaire acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | 24 VDC







## Zero dual






Ø1.050/1.550/3.030mm
Tolerance ±10%



### Equipment

Ø250/280x41mm




Ø1.050/1.535mm

Ø60x29mm




Ø3.035mm

Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power cable.

## Technical Information

| | |
|---|---|
| Power | 107W / 162W / 325W |
| Lumens | 5.457 lm - 17.225 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 1 | Opal (100°) | 8 | 1.050mm | 3 | 3.000K (55 lm/W) | 3 | On / Off | 1 | ○ White (9003) | 1 |
| | | | | 1.550mm | 8 | 4.000K (58 lm/W) | 4 | Dali | 2 | ● Black (9005) | 2 |
| | | | | 3.050mm | 9 | | | Push | 3 | | |
| | | | | | | | | Casambi | 5 | | |
| | | | | | | | | Tuya | 7 | | |

Code: 1 8

CE RoHS

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 230 VAC | PF >0,9 | CRI ≥80 | PUSH | DALI 2

Kaa







Kaa line







## Kaa



Equipment

Ø330mm x41mm



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 90W / 180W / 300W |
| Lumens | 3.690 lm - 21.900 lm |
| Installation | Pendant |
| Material | Aluminium and silicone |

| Code | |
|---|---|
| Code | 76 |

| Size (Led) | |
|---|---|
| 3 x 1.500mm | 1 |
| 3 x 3.000mm | 3 |
| 3 x 5.000mm | 5 |

| CCT (lm/W) | |
|---|---|
| 2.400K (60 lm/W) | 2 |
| 2.700K (65 lm/W) | 3 |
| 3.000K (69 lm/W) | 4 |
| 4.000K (73 lm/W) | 5 |
| RGB (41 lm/W) | 8 |
| 2.700-4.200K (55 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Custom RAL | C |

Code: 76

### Included accessories

Suspension kit 2m



1 x 3
3 x 6
5 x 9

+ Clip



1 x 3
3 x 6
5 x 9

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI



## Kaa line

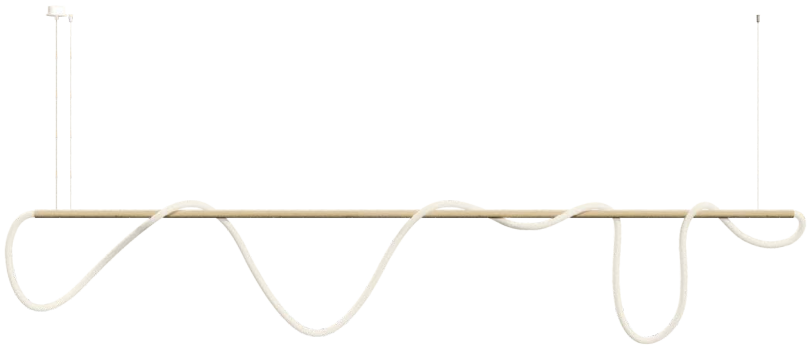

Equipment

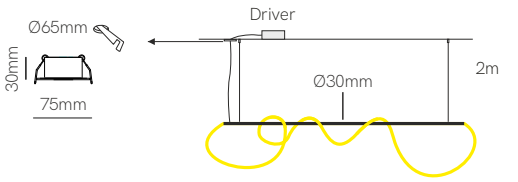


Control accessories pages 294-307.

*Finished luminaire. Includes power supply, suspension kit and power.

## Technical Information

| | |
|---|---|
| Power | 30W / 60W / 100W |
| Lumens | 1.230 lm - 7.300 lm |
| Installation | Pendant |
| Material | Aluminium and silicone |

| Code | |
|---|---|
| Code | 74 |

| Size (Stick + Led) | |
|---|---|
| 1.000 + 1.500mm | 1 |
| 1.600 + 3.000mm | 3 |
| 2.500 + 5.000mm | 5 |

| CCT (lm/W) | |
|---|---|
| 2.400K (60 lm/W) | 2 |
| 2.700K (65 lm/W) | 3 |
| 3.000K (69 lm/W) | 4 |
| 4.000K (73 lm/W) | 5 |
| RGB (41 lm/W) | 8 |
| 2.700-4.200K (55 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour (stick) | |
|---|---|
| White (9003) | 1 |
| Black (9005) | 2 |
| Matt Gold | 3 |
| Custom RAL | C |

Code: 74

CE RoHS EAC

Consult delivery terms and conditions.

*Create your code acording to your preferences. RGB-W and CCT 2.700-4.200K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | 360° | 2,5m Max | tuya | PUSH | DALI



## Horizon



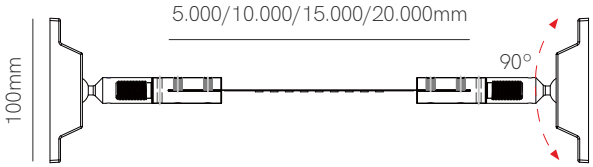


### Equipment

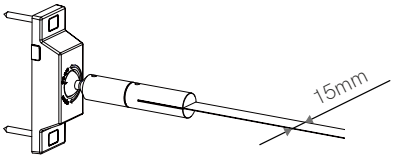





Compatible profiles.



## Technical Information

| | |
|---|---|
| Max. power | 48W - 288W |
| Lumens | 4.560 lm - 28.800 lm |
| Installation | Pendant |
| Material | Aluminium |
| Material | Flex |

| Code | |
|---|---|
| Code | 2 |

| Led | |
|---|---|
| 9,6W/m (Fine 51) | 5 |
| 14,4W/m (Fine 41) | 7 |

| Size (Led) | |
|---|---|
| 5.000mm | 1 |
| 10.000mm | 2 |
| 15.000mm | 3 |
| 20.000mm | 4 |

| CCT (lm/W) - Power/m | |
|---|---|
| 2.700K (95 lm/W) | 2 |
| 3.000K (98 lm/W) | 3 |
| 4.000K (100 lm/W) | 4 |

| Driver | |
|---|---|
| On / Off | 1 |

| Colour | |
|---|---|
| ☐ White (9003) | 1 |
| ■ Black (9005) | 2 |

Code: 2 1

## Accessories



2 holder
☐ HRZ-01
■ HRZ-02



1m steel band
☐ HRZ-PLE-01
■ HRZ-02

CE RoHS

*Led strip and power supply included.

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 24 VDC | PF >0,9 | CRI ≥90 | 20m Max



## Flash






*Finished luminaire. Includes spring clips and end caps.

## Technical Information

| | |
|---|---|
| Power | 16W / 27W / 35W / 46W / 55W |
| Lumens | 1.600 lm - 6.050 lm |
| Installation | Wall |
| Material | Aluminium |
| PCB | Flex (Fine 32) |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | Opal (90°) | 9 | 520mm | 1 | 2.700K (100 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 895mm | 2 | 3.000K (105 lm/W) | 3 | | | Black (9005) | 2 |
| | | | | 1.145mm | 3 | 4.000K (110 lm/W) | 4 | | | Aluminium | 9 |
| | | | | 1.520mm | 5 | 6.000K (110 lm/W) | 6 | | | Custom RAL | C |
| | | | | 1.825mm | 6 | | | | | | |

Code: 3 9 1

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

3 YEARS WARRANTY | 35.000 HOURS | 230 VAC | IP 20 | CRI ≥80 | 2m Max | TRIAC DIMM


96

## Triton






Installation



Control accessories pages 294-307.

*Finished luminaire. Includes power supply, clip rotable, 2mts power cable and end caps.

### Technical Information

| | |
|---|---|
| Power | 21W / 41W / 61W |
| Lumens | 2.625 lm - 8.235 lm |
| Installation | Surface |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | Asymmetric (15°/35°) | 9 | 420mm | 1 | 2.700K (125 lm/W) | 2 | On / Off | 1 | Black (9005) | 2 |
| | | | | 820mm | 2 | 3.000K (130 lm/W) | 3 | Dali | 2 | Custom RAL | C |
| | | | | 1.220mm | 3 | 4.000K (135 lm/W) | 4 | | | | |

Code: 4 9 2

CE RoHS EAC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥80 | DALI 2



## Triton down






Control accessories pages 294-307.

*Finished luminaire. Includes power supply, 2mts power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 46W / 57W / 69W / 80W / 103W |
| Lumens | 5.152 lm - 14.008 lm |
| Installation | Surface / Pendant |
| Material | Aluminium |
| PCB | Rigid |

| Code | | Diffuser (Angle) | | Size | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 4 | Opal (80°) | 6 | 1.130mm | 3 | 2.700K (112 lm/W) | 2 | On / Off | 1 | White (9003) | 1 |
| | | | | 1.410mm | 4 | 3.000K (128 lm/W) | 3 | Dali | 2 | Black (9005) | 2 |
| | | | | 1.690mm | 5 | 4.000K (136 lm/W) | 4 | | | Custom RAL | C |
| | | | | 1.970mm | 6 | 5.500K (136 lm/W) | 5 | | | | |
| | | | | 2.530mm | 7 | | | | | | |

Code: 4 6

Consult delivery terms and conditions.

*Create your code acording to your preferences.

## Accessories



Wall bracket
- 40531
- 40532



Ceiling suspension
- 40510



Suspension Kit
- 40520 (2m)

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 230 VAC | PF >0,9 | CRI ≥95 | DALI 2

# **Blaber** acoustic panels for custom system

BLABER is a line of acoustic panels made of PET felt, and in some models adapted to a line of luminaires to achieve maximum acoustic comfort for your projects, eliminating reverberation. The level of sound absorption will be palpable from day one.
The main objective of Blaber is to eliminate the residual sound that is commonly found in most spaces.
Discovering the sound of silence will make your spaces more pleasant to work, rest or enjoy the sensation of a place without noise or reverberation.
It has been proven that a healthy listening environment increases productivity and improves communication between people in it.
In addition, acoustic comfort, and regulations regarding maximum noise levels, make optimal sound quality more essential than ever.
Spaces such as offices and restaurants often experience heavy people traffic, that is why it is so important that, in addition to an attractive design, the materials manage to absorb sound to create a more comfortable and relaxed environment.
For this reason, architects and designers are increasingly interested in providing acoustic solutions to any space and Blaber is a guarantee of success in this regard.

BLABER es una gama de paneles acústicos de fieltro PET, y en algunos modelos adaptados a una línea de luminarias para lograr el máximo confort acústico para tus proyectos, eliminando la reverberación. El nivel de absorción del sonido será palpable desde el primer día.
El objetivo principal de la línea Blaber es eliminar el sonido residual que se encuentra habitualmente en prácticamente cualquier espacio.
Descubrir el sonido del silencio, hará que tus espacios sean más agradables para trabajar, descansar o disfrutar de la sensación que produce un lugar sin ruido ni reverberación
Está demostrado que un entorno auditivo saludable aumenta la productividad y mejora la comunicación entre las personas que se encuentran en él.
Además, el confort acústico, y las regulaciones relativas a los niveles máximos de ruido, hacen que la calidad de sonido óptima sea más importante que nunca.

Los espacios como oficinas y restaurantes a menudo experimentan un intenso tráfico de personas, por eso es tan importante que, además de un atractivo diseño, los materiales logren absorber el sonido para crear un ambiente más cómodo y relajado.
Por esta razón, son cada vez más los arquitectos y diseñadores que ponen especial interés en proveer de soluciones acústicas a cualquier espacio y Blaber es garantía de éxito en ese sentido.



Fire resistance
EN 13501-1+A1: B-s2, d0

**Acoustic absorption**
UNE-EN ISO 354:2004
Up to αw = 1 (-)
EN ISO 11654: Class A

**Composition**
100% PET
min. 60% Recycled

**Environment**
Recyclable, Low
VOC, REACH, EPD

Each panel contains
159 recycled PET bottles

Format
2440 mm x 1220 mm

Thickness
12 mm

Weight
2.440 g / m $^2$

Density
271 kg/m $^3$

Environmentally friendly
Recyclable, low VOC content, REAACH

EPD®
THE INTERNATIONAL EPD SYSTEM

We have a range of standard colors available and there is the possibility to manufacture custom colors for our colored PET felt acoustic panels with a minimum quantity.

Disponemos de una gama de colores estándar y existe la posibilidad de fabricar colores personalizados para nuestros paneles acústicos de fieltro PET de color con una cantidad mínima.

Standard colors


6


8


9


C6


D4


D6

Custom colors


C



New

## Blaber pick



Blaber thickness: 12mm




Equipment

455x47x28mm




1.328/1.552/1.776/2.000mm

Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 25W / 30W / 34W / 38W |
| Lumens | 2.250 lm - 5.320 lm |
| Installation | Pendant |
| Material | Aluminium |
| PCB | Flex (Fine 68) |

| Code | |
|---|---|
| Pendant | 8 |

| Diffuser (Angle) | |
|---|---|
| Opal (100°) | 2 |
| Transparent (30°) | 4 |

| Size | |
|---|---|
| 1.328mm | 2 |
| 1.552mm | 3 |
| 1.776mm | 4 |
| 2.000mm | 9 |

| CCT (lm/W) | |
|---|---|
| 2.700K (130 lm/W) | 2 |
| 3.000K (135 lm/W) | 3 |
| 4.000K (140 lm/W) | 4 |
| 1.800-4.000K (90 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| Tuya | 7 |

| Colour | |
|---|---|
| Black | 6 |
| Light gray | 8 |
| Orange | 9 |
| ⓘ Light blue | C6 |
| ⓘ Yellow | D4 |
| ⓘ Beige | D6 |
| ⓘ Custom | C |

Code: 8

*Create your code acording to your preferences. CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C

CE RoHS

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | tuya | PUSH | DALI 2


▶ VIDEO

## Blaber line



Equipment

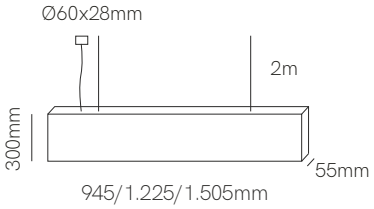


Control accessories pages 294-307.

*Finished luminaire. Includes suspension kit, power cable and end caps.

## Technical Information

| | |
|---|---|
| Power | 30W / 39W / 49W |
| Lumens | 2.730 lm - 5.047 lm |
| Installation | Pendant |
| Material | Aluminium and PET felt |
| PCB | Rigid |

| Code | | Diffuser (Angle) | |
|---|---|---|---|
| Line | B | Black Slats (60°) | 9 |

| Size | |
|---|---|
| 945mm | 2 |
| 1.225mm | 3 |
| 1.505mm | 4 |

| CCT (lm/W) | |
|---|---|
| 2.700K (91 lm/W) | 2 |
| 3.000K (96 lm/W) | 3 |
| 4.000K (103 lm/W) | 4 |
| N 2.700-5.500K (95 lm/W) | 9 |

| Driver | |
|---|---|
| On / Off | 1 |
| Dali | 2 |
| Push | 3 |
| Casambi | 5 |
| N Tuya | 7 |

| Colour | | |
|---|---|---|
| | Black | 6 |
| | Light gray | 8 |
| | Orange | 9 |
| ⓘ | Light blue | C6 |
| ⓘ | Yellow | D4 |
| ⓘ | Beige | D6 |
| ⓘ | Custom | C |

Code: B 9

*Create your code acording to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C

CE RoHS

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | UGR <17 | 230 VAC | PF >0,9 | CRI ≥90 | 1,55m Max | tuya | PUSH | DALI 2



## Blaber r






Ø400/700/900/1.000mm
Blaber thickness: 12mm

| Code | | Size | | Installation | | Colour | | |
|---|---|---|---|---|---|---|---|---|
| Round | BR | 400mm | 5 | Sound Absorbing | 32 | Black | 6 |
| | | 700mm | 6 | Pendant | 92 | Light gray | 8 |
| | | 900mm | 7 | | | Orange | 9 |
| | | 1.000mm | 8 | | | ⓘ Light blue | C6 |
| | | | | | | ⓘ Yellow | D4 |
| | | | | | | ⓘ Beige | D6 |
| | | | | | | ⓘ Custom | C |

Code: BR

New

## Blaber custom






Ø700/900/1.000mm
Blaber thickness: 12mm

| Code | | Size | | Led light | | Units | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Custom | B | 700mm | 6 | Nano pulsar 3,5W (page 415) | A | 1 | | Dali | 2 | Black | 6 |
| | | 900mm | 7 | Pulsar 8W (page 417) | B | 2 | | Triac | 4 | Light gray | 8 |
| | | 1.000mm | 8 | Oxo 12W (page 425) | D | 3 | | | | Orange | 9 |
| | | | | Tao 10W (page 437) | E | 4 | | | | ⓘ Light blue | C6 |
| | | | | Thessis 15W (page 441-443) | F | 5 | | | | ⓘ Yellow | D4 |
| | | | | Thessis 25W (page 441-443) | G | 6 | | | | ⓘ Beige | D6 |
| | | | | Ⓟ Custom | C | Custom | C | | | ⓘ Custom | C |

Code: B

Led light not included, must be ordered separately, please specify product codes in the order.

Ⓟ Consult with project department to combine sound absorbing with luminaires.

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | | 100% PET |



## Blaber sq

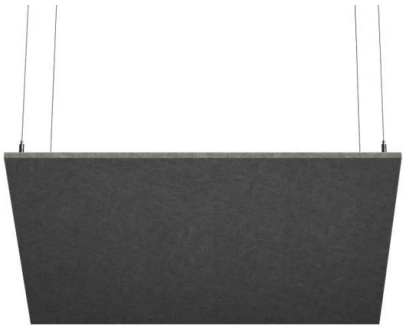

Blaber thickness: 12mm



1.195x295mm






1.195x595mm



595x595mm

| Code | | Size | | Installation | | Colour | |
|---|---|---|---|---|---|---|---|
| Square | **BC** | 595x595mm | **3** | Pendant | **32** | Black | **6** |
| | | 1.195x595mm | **4** | Armstrong | **92** | Light gray | **8** |
| | | N 1.195x295mm | **5** | | | Orange | **9** |
| | | | | | | ⓘ Light blue | **C6** |
| | | | | | | ⓘ Yellow | **D4** |
| | | | | | | ⓘ Beige | **D6** |
| | | | | | | ⓘ Custom | **C** |

Code: **BC**

New

## Blaber mirrow

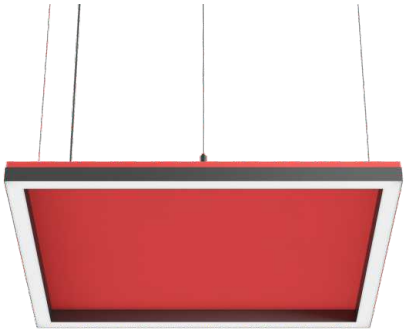

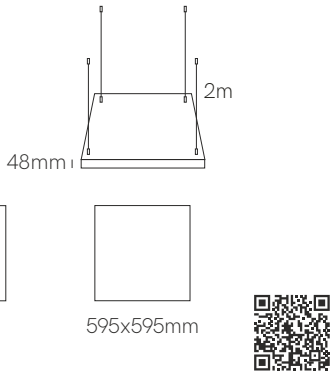


| Code | | Size | | Finishes | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Mirrow | C | 595x595mm (53W) | 3 | White (9003) | 1 | 2.700K (100 lm/W) | 2 | On / Off | 1 | Black | 6 |
| | | 1.195x595mm (80W) | 4 | Black (9005) | 2 | 3.000K (105 lm/W) | 3 | Dali | 2 | Light gray | 8 |
| | | | | ⓘ Custom RAL | C | 4.000K (111 lm/W) | 4 | Push | 3 | Orange | 9 |
| | | | | | | RGB-W (100 lm/W) | 8 | Casambi | 5 | ⓘ Light blue | C6 |
| | | | | | | 2.700-5.500K (105 lm/W) | 9 | Tuya | 7 | ⓘ Yellow | D4 |
| | | | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | | | ⓘ Custom | C |

Code: C

New

## Blaber evo



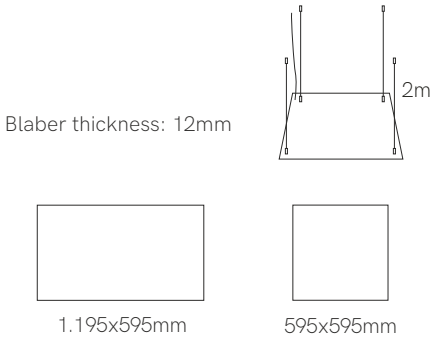


| Code | | Size | | Led light | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Pendant | P | 595x595mm | 3 | Led line | 1 | 2.700K (91 lm/W) | 2 | On / Off | 1 | Black | 6 |
| Amstrong | A | 1.195x595mm | 4 | Led line | 2 | 3.000K (96 lm/W) | 3 | Dali | 2 | Light gray | 8 |
| | | | | Led line | 3 | 4.000K (103 lm/W) | 4 | Push | 3 | Orange | 9 |
| | | | | | | RGB-W (86 lm/W) | 8 | Casambi | 5 | ⓘ Light blue | C6 |
| | | | | | | 2.700-6.500K (95 lm/W) | 9 | | | ⓘ Yellow | D4 |
| | | | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | | | ⓘ Custom | C |

Code:

Control accessories pages 294-307.

*Create your code acording to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya. .

Consult with project department to combine sound absorbing with luminaires.

ⓘ Consult delivery terms and conditions.

RoHS | 5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 20 Mirrow | IP 40 Evo | 230 VAC | PF >0,9 | CRI ≥90 | tuya | PUSH | DALI 2



New

## Blaber zero direct

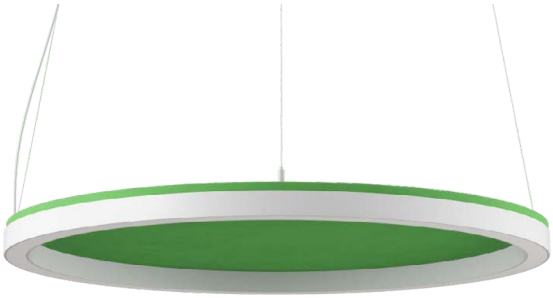




| Code | | Size / Power | | Finishes | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Zero direct | Z | 520mm / 35W | 0 | White (9003) | 1 | 2.700K (66 lm/W) | 2 | On / Off | 1 | Black | 6 |
| | | 800mm / 55W | 2 | Black (9005) | 2 | 3.000K (72 lm/W) | 3 | Dali | 2 | Light gray | 8 |
| | | 1.200mm / 75W | 6 | ⓘ Custom RAL | C | 4.000K (78 lm/W) | 4 | Push | 3 | Orange | 9 |
| | | | | | | 2.700-5.500K (70 lm/W) | 9 | Casambi | 5 | ⓘ Light blue | C6 |
| | | | | | | | | Tuya | 7 | ⓘ Yellow | D4 |
| | | | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | | | ⓘ Custom | C |

Code: Z

New

## Blaber zero in XL






| Code | | Size / Power | | Finishes | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Zero in XL | N | 400mm / 37W | 1 | White (9003) | 1 | 2.700K (150 lm/W) | 2 | On / Off | 1 | Black | 6 |
| | | 700mm / 65W | 2 | Black (9005) | 2 | 3.000K (155 lm/W) | 3 | Dali | 2 | Light gray | 8 |
| | | 1.000mm / 94W | 3 | ⓘ Custom RAL | C | 4.000K (160 lm/W) | 4 | Push | 3 | Orange | 9 |
| | | | | | | RGB-W (50 lm/W) | 7 | Casambi | 5 | ⓘ Light blue | C6 |
| | | | | | | 2.700-5.500K (100 lm/W) | 9 | Tuya | 7 | ⓘ Yellow | D4 |
| | | | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | | | ⓘ Custom | C |

Code: N

Control accessories pages 294-307.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya. ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | | 100% PET |



New

## Blaber mac





55mm



Ø520/700/900mm

Control accessories pages 294-307.

*Finished luminaire. Includes power cable.

## Technical Information

| | |
|---|---|
| Power | 23W / 33W / 45W |
| Lumens | 1.552 lm - 5.400 lm |
| Installation | Wall |
| Material | Aluminium and PET felt |
| PCB | Flex (fine 96) |

| Code | |
|---|---|
| Mac | **MC** |

| Size | |
|---|---|
| 520mm | **1** |
| 700mm | **2** |
| 900mm | **3** |
| ⓘ Custom | **C** |

| CCT (lm/W) | |
|---|---|
| 3.000K (106 lm/W) | **3** |
| 4.000K (120 lm/W) | **4** |
| RGB-W (67,5 lm/W) | **8** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Push | **3** |
| Casambi | **5** |
| Tuya | **7** |

| Colour | |
|---|---|
| Black | **6** |
| Light gray | **8** |
| Orange | **9** |
| ⓘ Light blue | **C6** |
| ⓘ Yellow | **D4** |
| ⓘ Beige | **D6** |
| ⓘ Custom | **C** |

Code: **MC** _ _ _ _ _

*Create your code acording to your preferences. RGB-W only works with driver 5 Casambi and 7 Tuya.

ⓘ Consult delivery terms and conditions.

Standard colors



6 8 9 C6 D4 D6

Custom



C

CE RoHS

5 YEARS WARRANTY | 100% PET | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥90 | PUSH | DALI 2



New

## Blaber atmos



*Included surface and recessed base.




Ø400/520/700mm

| Code | | Size | | Led light | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|
| Atmos | A | 400mm | 1 | ○ Atmos XL 10W white (page 515) | 1 | Switch | 9 | Black | 6 |
| | | 520mm | 2 | ● Atmos XL 10W black (page 515) | 2 | | | Light gray | 8 |
| | | 700mm | 3 | | | | | Orange | 9 |
| | | | | | | | | ⓘ Light blue | C6 |
| | | | | | | | | ⓘ Yellow | D4 |
| | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | ⓘ Custom | C |

Code: A 9

New

## Blaber atmos slim



*Included surface and recessed base.




Ø400/520/700mm

| Code | | Size | | Led light | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|
| Atmos slim | A | 400mm | 4 | ○ Atmos slim XL 6W white (page 513) | 1 | Tuya | 7 | Black | 6 |
| | | 520mm | 5 | ● Atmos slim XL 6W black (page 513) | 2 | | | Light gray | 8 |
| | | 700mm | 6 | | | | | Orange | 9 |
| | | | | | | | | ⓘ Light blue | C6 |
| | | | | | | | | ⓘ Yellow | D4 |
| | | | | | | | | ⓘ Beige | D6 |
| | | | | | | | | ⓘ Custom | C |

Code: A 7

*Create your code acording to your preferences.

ⓘ Consult delivery terms and conditions.

RoHS

5 YEARS WARRANTY | | | 100% PET |

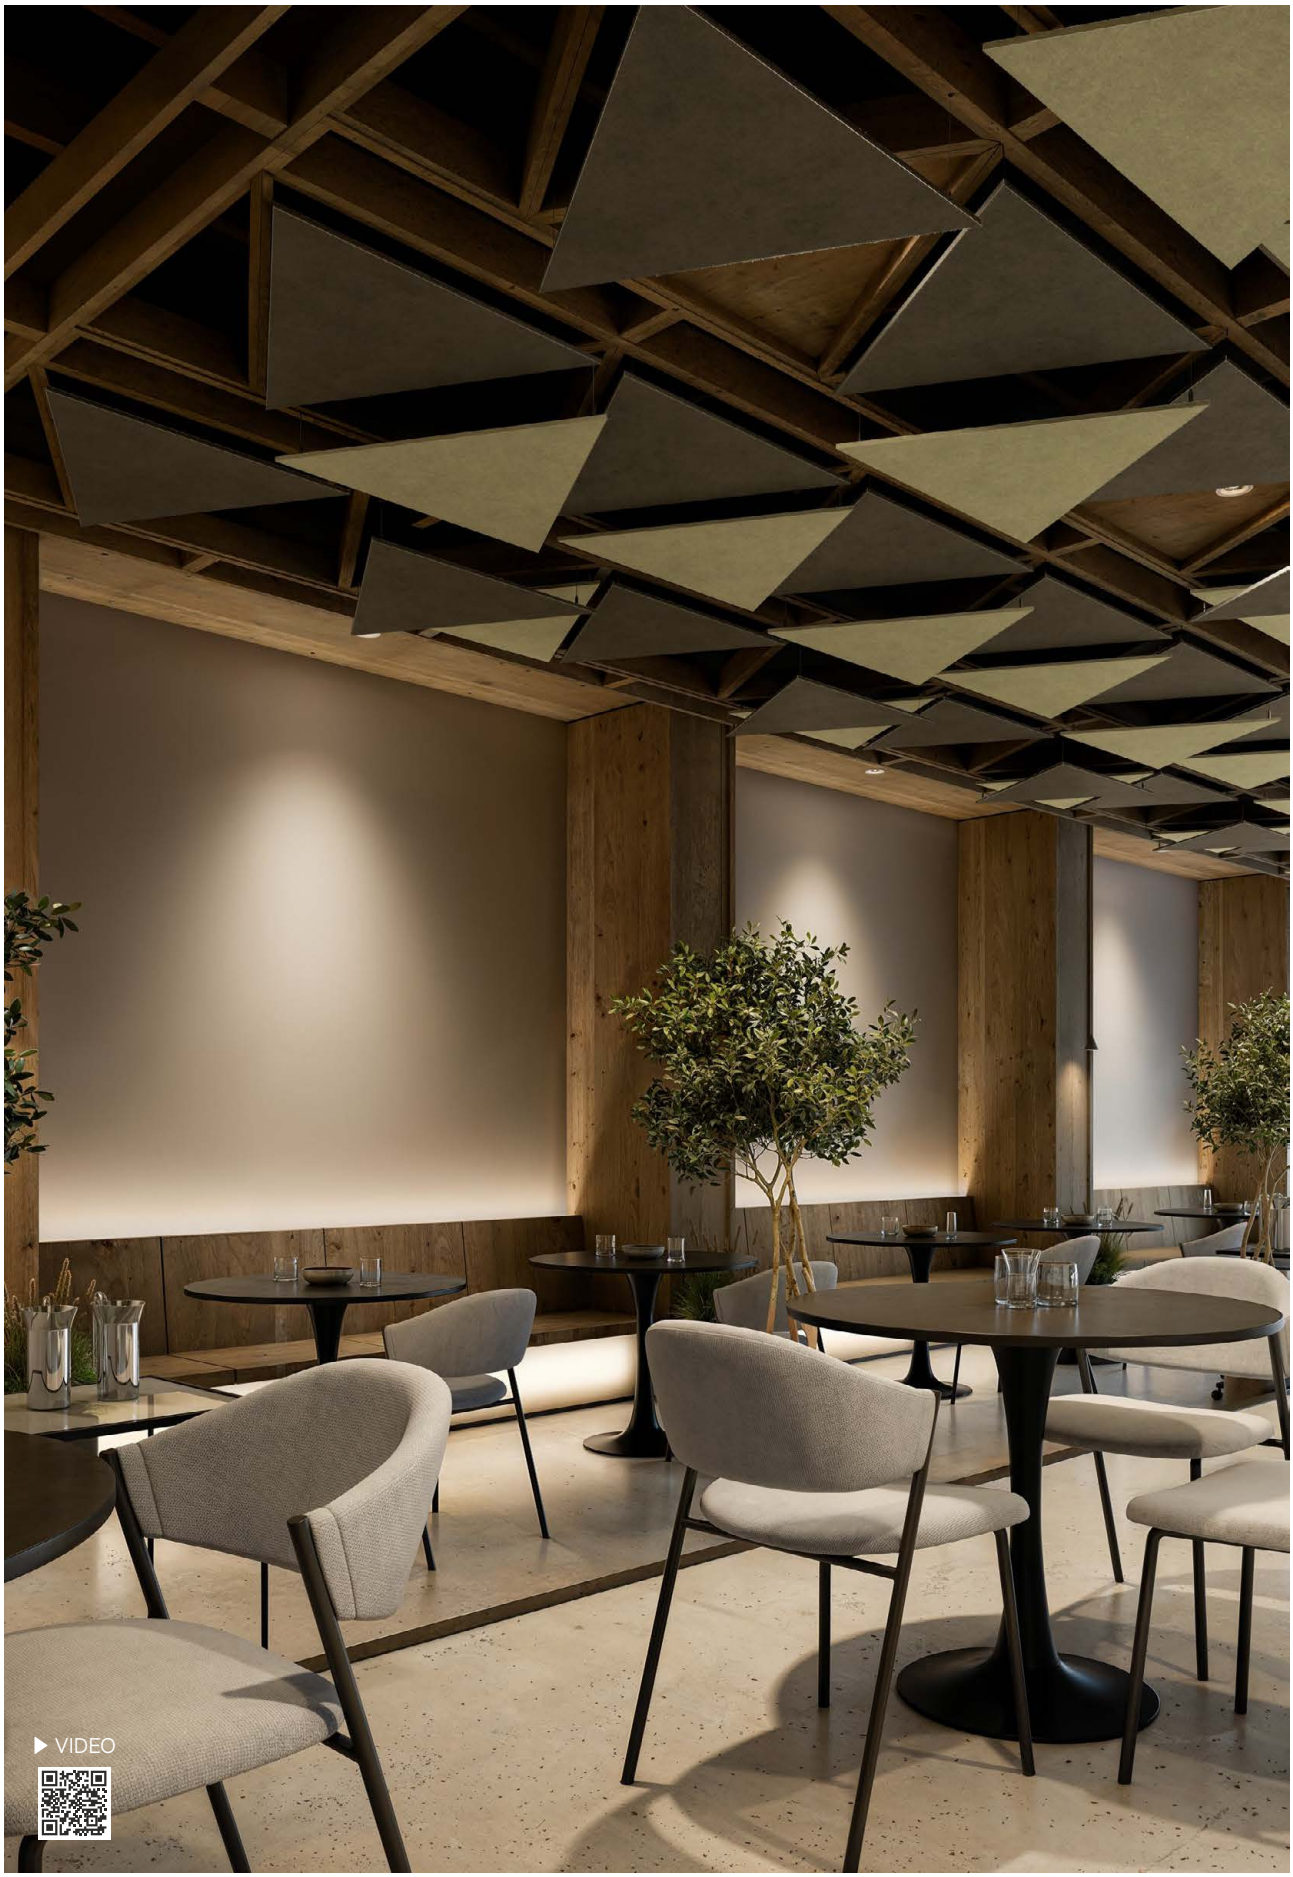
▶ VIDEO

## Blaber trgl

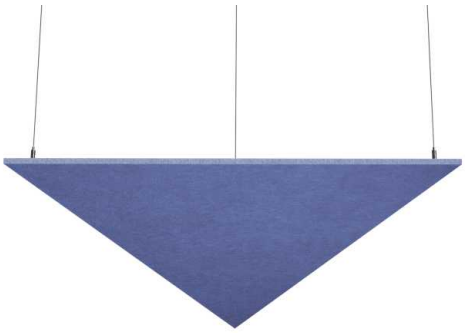




600x600x600mm
840x840x840mm
Blaber thickness: 12mm

| Code | | Size | | Installation | | Colour | | |
|---|---|---|---|---|---|---|---|---|
| Triangular | **BT** | 600x600x600mm | **1** | Sound Absorbing | **32** | Black | **6** |
| | | 840x840x840mm | **2** | Pendant | **92** | Light gray | **8** |
| | | | | | | Orange | **9** |
| | | | | | | ⓘ Light blue | **C6** |
| | | | | | | ⓘ Yellow | **D4** |
| | | | | | | ⓘ Beige | **D6** |
| | | | | | | ⓘ Custom | **C** |

Code: **BT**

New

## Blaber tax

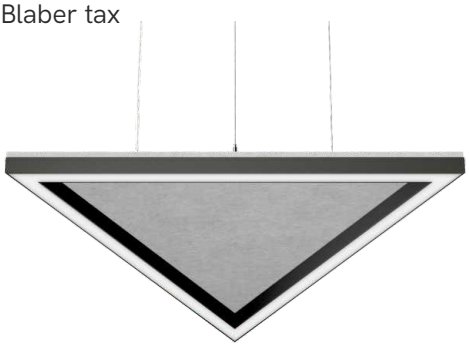




600x600x600mm
840x840x840mm

| Code | | Size | | Finishes | | CCT (lm/W) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Tax | **T** | 600x600x600mm (39W) | **4** | White (9003) | **1** | 2.700K (100 lm/W) | **2** | On / Off | **1** | Black | **6** |
| | | 840x840x840mm (55W) | **8** | Black (9005) | **2** | 3.000K (105 lm/W) | **3** | Dali | **2** | Light gray | **8** |
| | | | | ⓘ Custom RAL | **C** | 4.000K (111 lm/W) | **4** | Push | **3** | Orange | **9** |
| | | | | | | RGB-W (100 lm/W) | **8** | Casambi | **5** | ⓘ Light blue | **C6** |
| | | | | | | 2.700-5.500K (105 lm/W) | **9** | Tuya | **7** | ⓘ Yellow | **D4** |
| | | | | | | | | | | ⓘ Beige | **D6** |
| | | | | | | | | | | ⓘ Custom | **C** |

Code: **T**

Control accessories pages 294-307.

*Create your code acording to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Consult with project department to combine sound absorbing with luminaires.

ⓘ Consult delivery terms and conditions.

CE RoHS

5 YEARS WARRANTY | | | | 100% PET |

# Custom system accessories

## Time



End caps
- ☐ 40741
- ■ 40742
- ▢ 40743



End caps
- ☐ 40751
- ■ 40752
- ▢ 40753



Joint 180°
- ■ 40770



Joint 90°
- ■ 40990



Joint 90°
- ■ 40410



Joint 120°
- ■ 40666



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ■ 40339

## Urban



End caps
- ☐ 40721
- ■ 40722
- ▢ 40723



End caps
- ☐ 40731
- ■ 40732
- ▢ 40733



Joint 180°
- ■ 40220



Joint 90°
- ■ 40550



Joint 90°
- ■ 40610



Joint 120°
- ■ 40999



Wall bracket
- ☐ 40851
- ■ 40852
- ▢ 40853



Trimless
- ■ 40669

## Time / Urban



Base 3x0,75 (2,5m)
Ø60x28mm
- ○ 40881
- ● 40882
- ◌ 40883



Base 5x0,5 (2,5m)
Ø60x28mm
- ○ 40991
- ● 40992
- ◌ 40993



Base 3x0,75 (5m)
Ø60x28mm
- ○ 40581
- ● 40582
- ◌ 40583



Base 5x0,5 (5m)
Ø60x28mm
- ○ 40591
- ● 40592
- ◌ 40593



Ceiling suspension
- ● 40780



Suspension kit
- ● 40790 (2m)
- ● 40795 (5m)



Recessed base
3x0,75 (2,5m)
Ø75x30mm
- ○ 40831
- ● 40832
- ◌ 40833



Recessed base
5x0,5 (2,5m)
Ø75x30mm
- ○ 40931
- ● 40932
- ◌ 40933



Recessed base
3x0,75 (5m)
Ø75x30mm
- ○ 40481
- ● 40482
- ◌ 40483



Recessed base
Base 5x0,5 (5m)
Ø75x30mm
- ○ 40541
- ● 40542
- ◌ 40543

## Zero Design



End Cap
- ☐ 40631
- ■ 40632
- ■ 40634
- ■ 40635



Suspension Kit Metallic (2m)
- ◉ 34720
- ○ 34721
- ● 34722



Ceiling suspension
- ■ 40430



Kit Joint Metallic
- ■ 40490
- ☐ 40491
- ■ 40492



Base Ø330x41mm

| | | | |
|---|---|---|---|
| ○ | Z12411 | ● Z12412 | 240W/24VDC ON/OFF |
| ○ | Z12421 | ● Z12422 | 200W/24VDC DALI |
| ○ | Z12431 | ● Z12432 | 240W/24VDC PUSH |
| ○ | Z12451 | ● Z12452 | 240W/24VDC CASAMBI |
| ○ | Z12471 | ● Z12472 | 240W/24VDC TUYA |



Base Ø280x41mm

| | | | |
|---|---|---|---|
| ○ | Z11511 | ● Z11512 | 150W/24VDC ON/OFF |
| ○ | Z11521 | ● Z11522 | 120W/24VDC DALI |
| ○ | Z11531 | ● Z11532 | 150W/24VDC PUSH |
| ○ | Z11551 | ● Z11552 | 150W/24VDC CASAMBI |
| ○ | Z11571 | ● Z11572 | 150W/24VDC TUYA |



Base Ø250x41mm

| | | | |
|---|---|---|---|
| ○ | Z11011 | ● Z11012 | 75W/24VDC ON/OFF |
| ○ | Z11021 | ● Z11022 | 75W/24VDC DALI |
| ○ | Z11031 | ● Z11032 | 75W/24VDC PUSH |
| ○ | Z11051 | ● Z11052 | 75W/24VDC CASAMBI |
| ○ | Z11071 | ● Z11072 | 75W/24VDC TUYA |

## Power supplies linear box



Base 455x47x28mm

| | | | |
|---|---|---|---|
| | ☐ 35331 | ■ 35332 | 30W/24VDC on/off |
| | ☐ 35361 | ■ 35362 | 60W/24VDC on/off |
| | ☐ 35311 | ■ 35312 | 100W/24VDC on/off |
| New | ☐ 35351 | ■ 35352 | 150W/24VDC on/off |
| New | ☐ 35731 | ■ 35732 | 30W/24VDC dali |
| New | ☐ 35761 | ■ 35762 | 60W/24VDC dali |
| New | ☐ 35711 | ■ 35712 | 100W/24VDC dali |
| New | ☐ 35751 | ■ 35752 | 150W/24VDC dali |



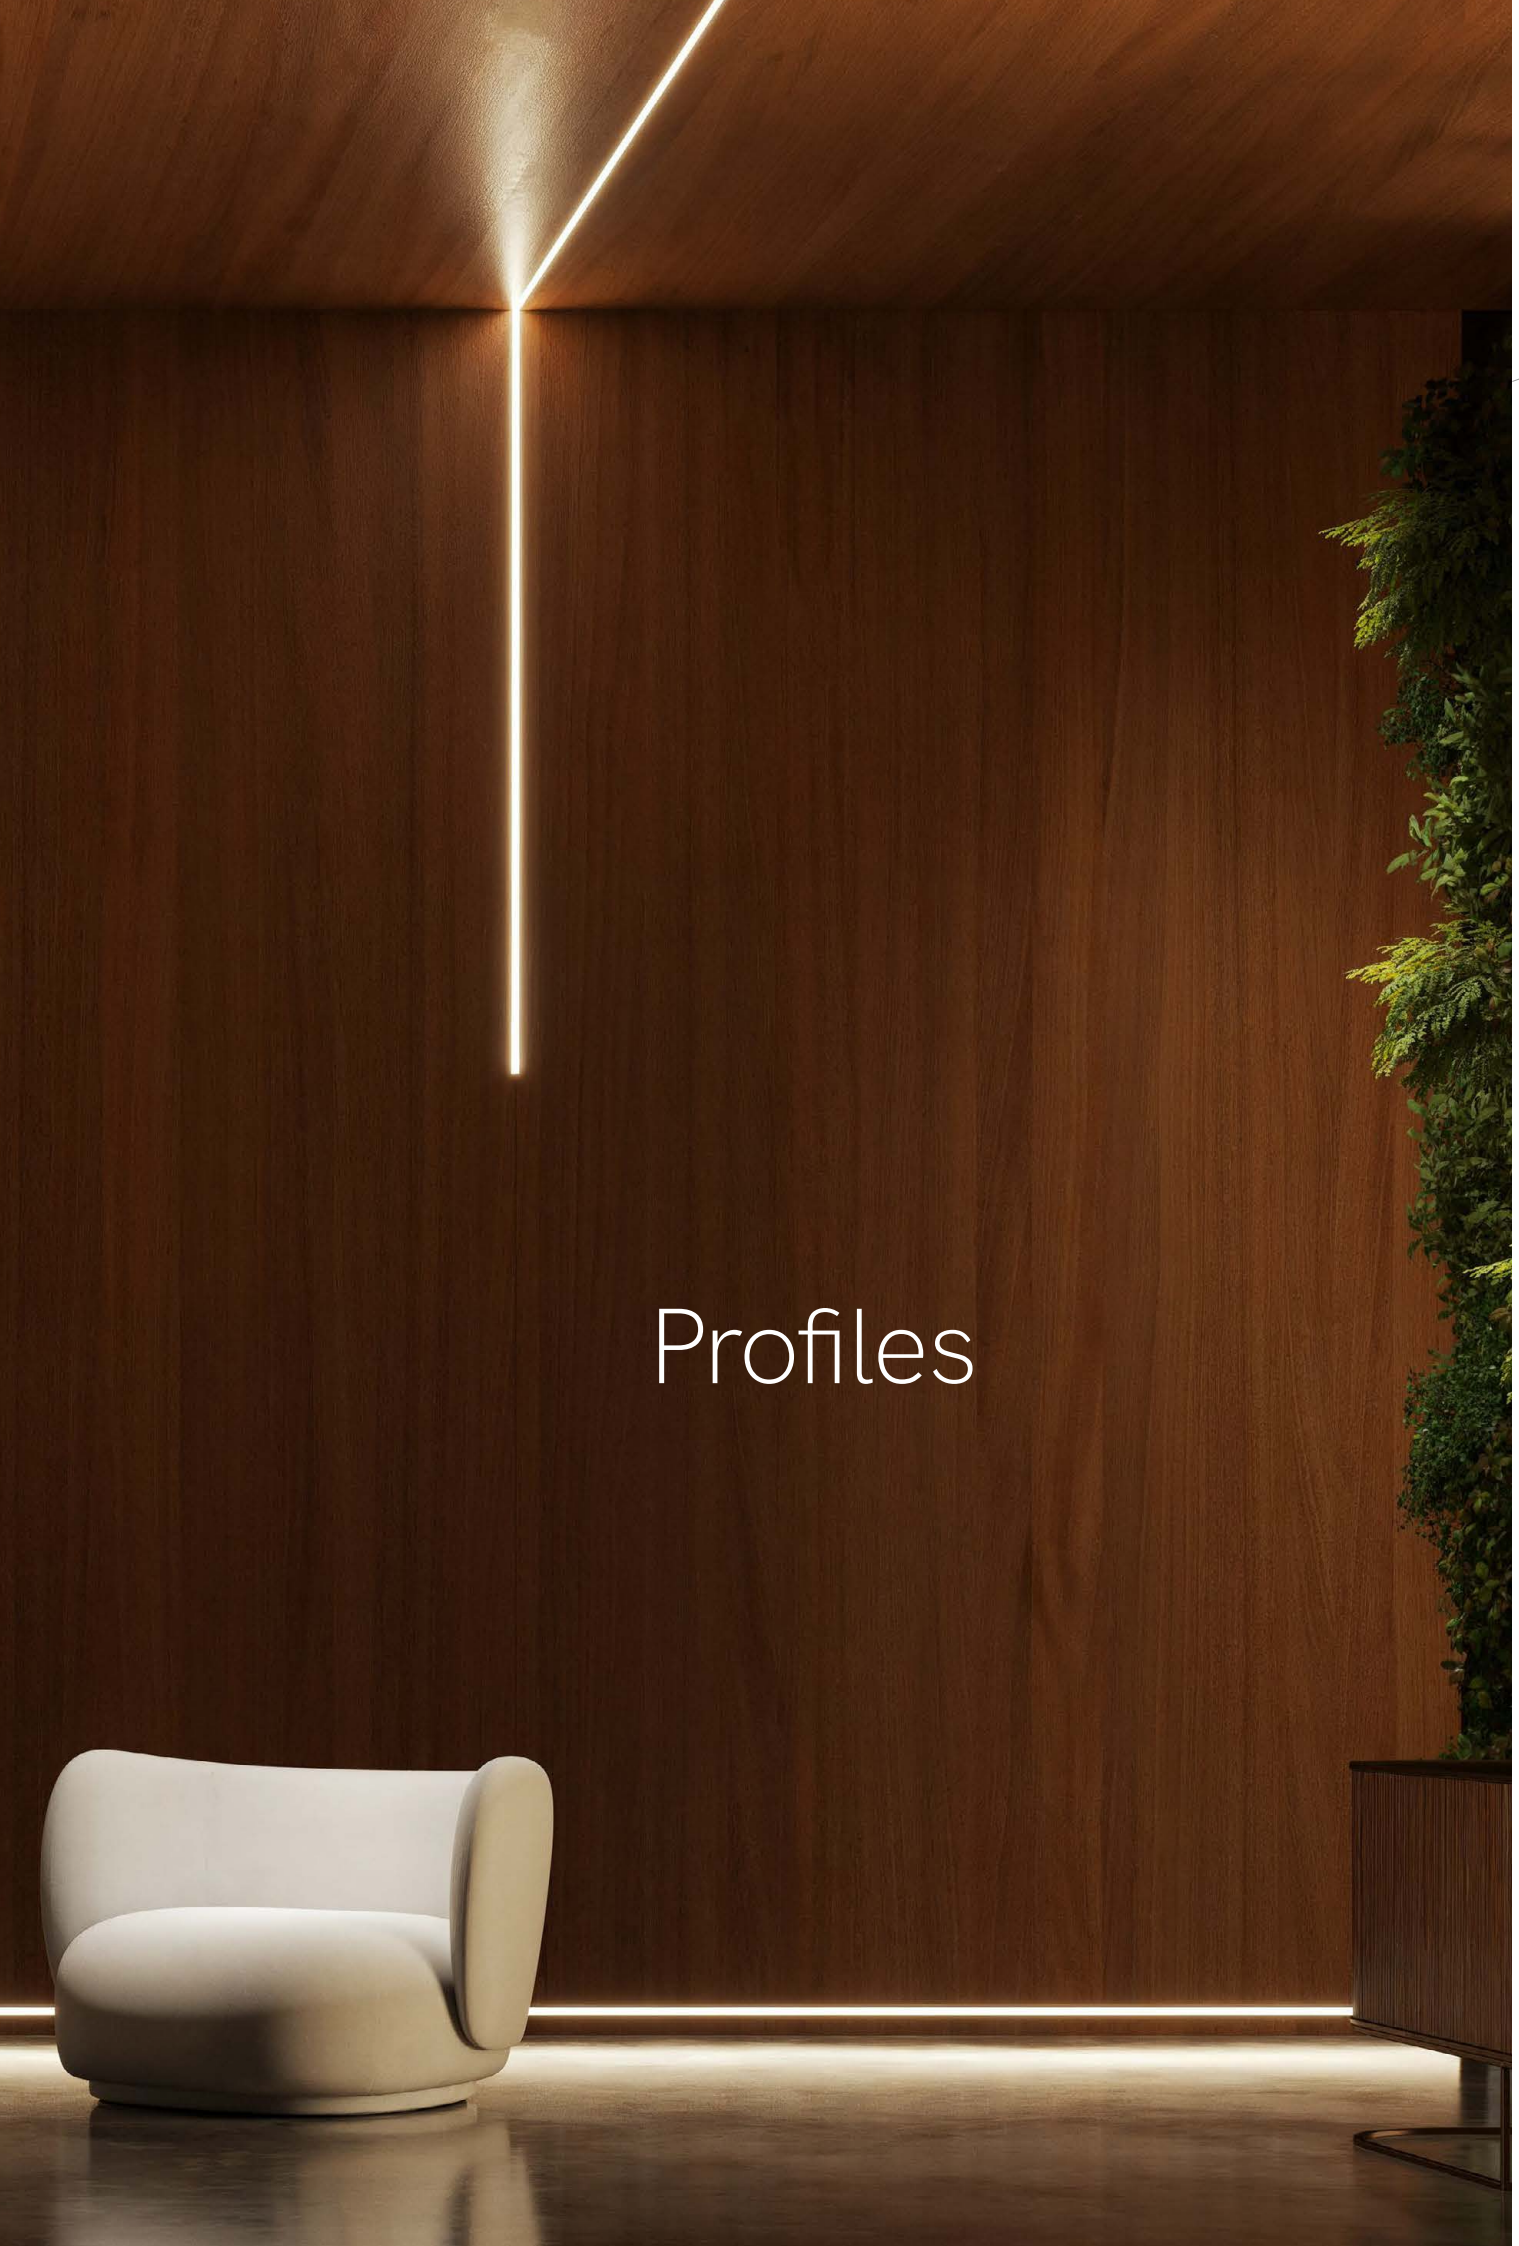

# Profiles

| | Model | Page | Section Size | Installation |
|---|---|---|---|---|
| | BOX 15 | 171 | 25x7 mm | Recessed |
| | BOX 16 | 171 | 17,3x7 mm | Surface |
| | BOX 17 | 172 | 25x14,5mm | Recessed |
| | BOX 18 | 172 | 17,3x14,5 mm | Surface |
| | BOX 53 | 173 | 30,5x10,8mm | Recessed |
| | BOX 23 | 173 | 23x10,8 mm | Surface |
| NEW | BOX 87 | 175 | 12,5x8,7 mm | Recessed |
| NEW | BOX 92 | 175 | 18,7x10,5 mm | Recessed |
| NEW | BOX 74 | 176 | 26,5x12,5 mm | Recessed |
| NEW | BOX 43 | 176 | 18,5x11,8 mm | Surface |
| | BOX 95 | 177 | 23,25x22 mm | Recessed |
| | BOX 75 | 177 | 16x24,5 mm | Surface / Pendant |
| | BOX 38 | 179 | 50x35 mm | Recessed |
| | BOX 35 | 179 | 35x35 mm | Surface / Pendant |
| | BOX 14 | 180 | 16x16 mm | Surface / Corner |
| | BOX 71 | 180 | 18,4x18,4 mm | Surface / Corner |
| | BOX 60 | 181 | 20x16 mm | Surface / Corner |
| | BOX 99 | 183 | 10x12 mm | Surface / Pendant |
| | BOX 11 | 184 | 16x15 mm | Recessed |
| | BOX 12 | 184 | 10x15 mm | Surface |

| Max Power | IP | Standard finishes | Standard Size |
|---|---|---|---|
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | White Alum. | 2m |
| 15W MAX | 20 IP | Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 40W MAX | 20 IP | White Black Alum. | 2m |
| 40W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX | 20 IP | White Black | 2m |
| 15W MAX | 20 IP | Alum. | 2m |
| 15W MAX | 20 IP | Alum. | 2m |

| | Model | Page | Section Size | Installation |
|---|---|---|---|---|
| | BOX 13 | 185 | 17,9x5,7 mm | Surface / Flex |
| | BOX 10 | 186 | 35x25 mm | Recessed |
| | BOX 19 | 186 | 25x25 mm | Surface / Pendant |
| | BOX 37 | 187 | 79x32 mm | Trimless |
| | BOX 24 | 189 | 29,5x17,4 mm | Recessed |
| NEW | BOX 69 | 191 | 56,4x13,3 mm | Trimless |
| | BOX 68 | 193 | 60x13 mm | Trimless |
| NEW | BOX 32 | 193 | 35,9x14 mm | Trimless |
| | BOX 22 | 194 | 17,8x48,6 mm | Surface |
| | BOX 33 | 195 | 29,4x50 mm | Surface |
| | BOX 98 railing | 197 | 78,8x95 mm | Surface / Railing |
| | BOX 21 | 198 | 26,2x76,2 mm | Recessed |
| | BOX 27 | 199 | 17,7x43,5 mm | Surface |
| | BOX 65 | 201 | 15x80 mm | Surface / Skirting |
| | BOX 67 | 203 | 65x28 mm | Surface / Stairs |
| | BOX 39 | 204 | Ø28 mm | Surface / Pendant |
| | BOX 28 | 205 | 18x22,2 mm | Surface |
| | BOX 29 | 207 | 21x26mm | Recessed |
| | BOX 73 | 208 | 21x21 mm | Surface |
| | BOX 30 | 209 | 12x2 mm / 20x2mm | Surface |

| Max Power | IP | Standard finishes | Standard Size |
|---|---|---|---|
| 15W MAX | 20 IP | Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 25W MAX | 20 IP | White Black Alum. | 2m |
| 40W MAX | 40 IP | White | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 15W MAX | 20 IP | Alum. | 2m |
| 20W MAX | 20 IP | White Black | 2m |
| 20W MAX | 20 IP | White | 2m |
| 2x15W MAX | 20 IP | Black Alum. | 2m |
| 20W MAX | 20 IP | White Black Alum. | 2m |
| 30W MAX | 20 IP | White Black | 2m |
| 15W MAX | 20 IP | White Alum. | 2m |
| 15W MAX | 20 IP | White Black Alum. | 2m |
| 12W MAX | 20 IP | White Black Alum. | 2m |
| 12W MAX | 20 IP | Black | 2m |
| 25W MAX | 20 IP | Black | 2m |
| 40W MAX | 20 IP | Alum. | 2m |
| 25W MAX | 55 IP | Alum. | 2m |
| 22W MAX | 20 IP | White Black Alum. | 2m |
| 20W MAX 40W MAX | 20 IP | Alum. | 2m |



## Box 15









*Useful area: 12x5mm.



115°

## Box 16






*Useful area: 12x5mm.



115°

Compatible led strips.



Box 15 Box 16

## Technical Information

| | Box 15 | Box 16 |
|---|---|---|
| Max. power | 20W/m | 20W/m |
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |
| Code | ☐ 15121 | ☐ 16121 |
| | ■ 15122 | ■ 16122 |
| | ▩ 15119 | ▩ 16119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC Transp. 90%
☐ 20450



Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15

### Box 15 accessories



End Cap
☐ 15631
■ 15632
▩ 15633



End Cap
☐ 15621
■ 15622
▩ 15623

### Box 16 accessories



End Cap
☐ 16631
■ 16632
▩ 16633



End Cap
☐ 16621
■ 16622
▩ 16623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350



Clip PC
▩ 20380
■ 20382

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 17



18mm x L

*Useful area: 12x10mm.






65°

Box 17

## Box 18









*Useful area: 12x10mm.



65°



60°

Box 18

Compatible led strips.



## Technical Information

| | Box 17 | Box 18 |
|---|---|---|
| Max. power | 20W/m | 20W/m |
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 17 | Box 18 |
|---|---|---|
| | ☐ 17121 | ☐ 18121 |
| | ■ 17122 | ■ 18122 |
| | ▩ 17119 | ▩ 18119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC Transp. 90%
☐ 20450



Diffuser PC Opal 70%
▩ 20440



Diffuser PC Black 50%
■ 20472



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15

### Box 17 accessories



End Cap
☐ 17631
■ 17632
▩ 17633



End Cap
☐ 17621
■ 17622
▩ 17623

### Box 18 accessories



End Cap
☐ 18631
■ 18632
▩ 18633



End Cap
☐ 18621
■ 18622
▩ 18623



Clip Metallic
▩ 20330



Clip Rotable Metallic
▩ 20350



Clip PC
▩ 20380
■ 20382



End Cap 60°
☐ 18651
■ 18652
▩ 18653



End Cap 60°
☐ 18661
■ 18662
▩ 18663



Diffuser PC Optic 60° Transp. 90%
☐ 20430

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 53



25mm x L




*Useful area: 20x6mm.



115°

## Box 23






*Useful area: 20x6mm.



115°

Compatible led strips.



Box 53 Box 23

## Technical Information

| | Box 53 | Box 23 |
|---|---|---|
| Max. power | 25W/m | 25W/m |
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 53 | Box 23 |
|---|---|---|
| | ☐ 53121 | ☐ 23121 |
| | ■ 53122 | ■ 23122 |
| | ▢ 53119 | ▢ 23119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC
Opal 70%
▢ 23480

### Box 53 accessories



End Cap
☐ 53631
■ 53632
▢ 53633



End Cap
☐ 53621
■ 53622
▢ 53623

### Box 23 accessories



End Cap
☐ 23631
■ 23632
▢ 23633



End Cap
☐ 23621
■ 23622
▢ 23623



Clip PC
▢ 23380

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063


MILAN
4865
MADE IN GERMANY
STAEDTLER

New

## Box 87



11mm x L




*Useful area: 5x2,5mm.



70°

## Box 92



14,5mm x L




*Useful area: 12x3mm.



95°

Compatible led strips.



Box 87 Box 92

## Technical Information

| | Box 87 | Box 92 |
|---|---|---|
| Max. power | 15W/m | 15W/m |
| Installation | Recessed | Recessed |
| Material | Aluminium | Aluminium |
| Finishes | Black / Aluminium | Aluminium |

| Code | Box 87 | Box 92 |
|---|---|---|
| | ■ 87122 | □ 92119 |
| | □ 87119 | ⓘ Custom RAL |
| | ⓘ Custom RAL | |

ⓘ Consult delivery terms and conditions.

### Box 87 accessories



Diffuser PC Opal 70%
□ 87440



Diffuser PC Black 50%
■ 87520



End Cap
■ 87632
□ 87633



End Cap
■ 87622
□ 87623



Clip Metallic
■ 87330

### Box 92 accessories



Diffuser PC Opal 70%
□ 92440



End Cap
□ 92633



End Cap
□ 92623



Clip Metallic
■ 92330

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

New

## Box 74



## Box 43



24mm x L







*Useful area: 16x6mm.



85°



90°

Box 74

Box 43

Compatible led strips.

## Technical Information

| | Box 74 | Box 43 |
|---|---|---|
| Max. power | 25W/m | 25W/m |
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 74 | Box 43 |
|---|---|---|
| | ☐ 74121 | ☐ 43121 |
| | ■ 74122 | ■ 43122 |
| | ☐ 74119 | ☐ 43119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC Opal 70%
☐ 43440

### Box 74 accessories



End Cap
☐ 74631
■ 74632
☐ 74633



End Cap
☐ 74621
■ 74622
☐ 74623

### Box 43 accessories



End Cap
☐ 43631
■ 43632
☐ 43633



End Cap
☐ 43621
■ 43622
☐ 43623



Clip Metallic
☐ 43330



Clip 45° Metallic
☐ 43530

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 95






*Useful area: 12x3mm.







## Box 75






*Useful area: 12x3mm.




Compatible led strips.



Box 95 Box 75

## Technical Information

| | Box 95 | Box 75 |
|---|---|---|
| Max. power | 22W/m | 15W/m |
| Installation | Recessed | Surface / Pendant |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 95 | Box 75 |
|---|---|---|
| | ☐ 95121 | ☐ 75121 |
| | ■ 95122 | ■ 75122 |
| | ▩ 95119 | ▩ 75119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Opal Prismatic
☐ 75440

### Box 95 accessories



End Cap
☐ 95631
■ 95632
▩ 95633



End Cap
☐ 95621
■ 95622
▩ 95623



Clip Metallic
▩ 24710

### Box 75 accessories



End Cap
☐ 75621
■ 75622
▩ 75623



Hanging bracket Metallic
▩ 75330



Suspension Kit Metallic
● 75720 (2m)

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



## Box 38









*Useful area: 23x20mm.

## Box 35









*Useful area: 23x20mm.

Compatible led strips.



Box 38 Box 35

## Technical Information

| | Box 38 | Box 35 |
|---|---|---|
| Max. power | 40W/m | 40W/m |
| Installation | Recessed | Surface / Pendant |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 38 | Box 35 |
|---|---|---|
| | ☐ 38121 | ☐ 35121 |
| | ■ 38122 | ■ 35122 |
| | ▢ 38119 | ▢ 35119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC Transp. 90%
☐ 20750



Diffuser PC Opal 70%
▢ 20700



Diffuser PC Black 50%
■ 20772



Joint 180° Metallic
▢ 20520



Joint 90° Metallic
▢ 20510



Joint 90° Metallic
▢ 20540



Joint 120° Metallic
▢ 20530

### Box 38 accessories



End Cap
☐ 38621
■ 38622
▢ 38623



Spring Clip Metallic
▢ 20710

### Box 35 accessories



End Cap
☐ 35621
■ 35622
▢ 35623



Clip Metallic
▢ 35330



Suspension Kit Metallic
● 20720 (2m)



Base 455x47x28mm

| | | | |
|---|---|---|---|
| | ☐ 35331 | ■ 35332 | 30W/24VDC on/off |
| | ☐ 35361 | ■ 35362 | 60W/24VDC on/off |
| | ☐ 35311 | ■ 35312 | 100W/24VDC on/off |
| NEW | ☐ 35351 | ■ 35352 | 150W/24VDC on/off |
| NEW | ☐ 35731 | ■ 35732 | 30W/24VDC dali |
| NEW | ☐ 35761 | ■ 35762 | 60W/24VDC dali |
| NEW | ☐ 35711 | ■ 35712 | 100W/24VDC dali |
| NEW | ☐ 35751 | ■ 35752 | 150W/24VDC dali |

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 14






*Useful area: 10x5mm.




## Box 71






*Useful area: 14x5mm.




Box 14

Box 71

Compatible led strips.

## Technical Information

| | Box 14 | Box 71 |
|---|---|---|
| Max. power | 15W/m | 22W/m |
| Installation | Surface / corner | Surface / corner |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 14 | Box 71 |
|---|---|---|
| | ○ 14121 | □ 71121 |
| | ● 14122 | ■ 71122 |
| | ◯ 14119 | ▢ 71119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Box 14 accessories



Diffuser PC Opal 70%
○ 14480



End Cap
○ 14631
● 14632
◯ 14633



End Cap
○ 14621
● 14622
◯ 14623



Clip Metallic
◯ 14330

### Box 71 accessories



Diffuser PC Opal 70%
▢ 71440



End Cap
□ 71631
■ 71632
▢ 71633



End Cap
□ 71621
■ 71622
▢ 71623



Clip Metallic
▢ 71330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 60






*Useful area: 12x3mm.










Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface / corner |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 60121 |
| | ■ 60122 |
| | ☐ 60119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 60440



End Cap left
☐ 60631
■ 60632
☐ 60633



End Cap right
☐ 60621
■ 60622
☐ 60623



Clip Metallic
☐ 60330

CE RoHS

3 YEARS WARRANTY | IP 20 | 30°-60° | 2m Max | AL 6063



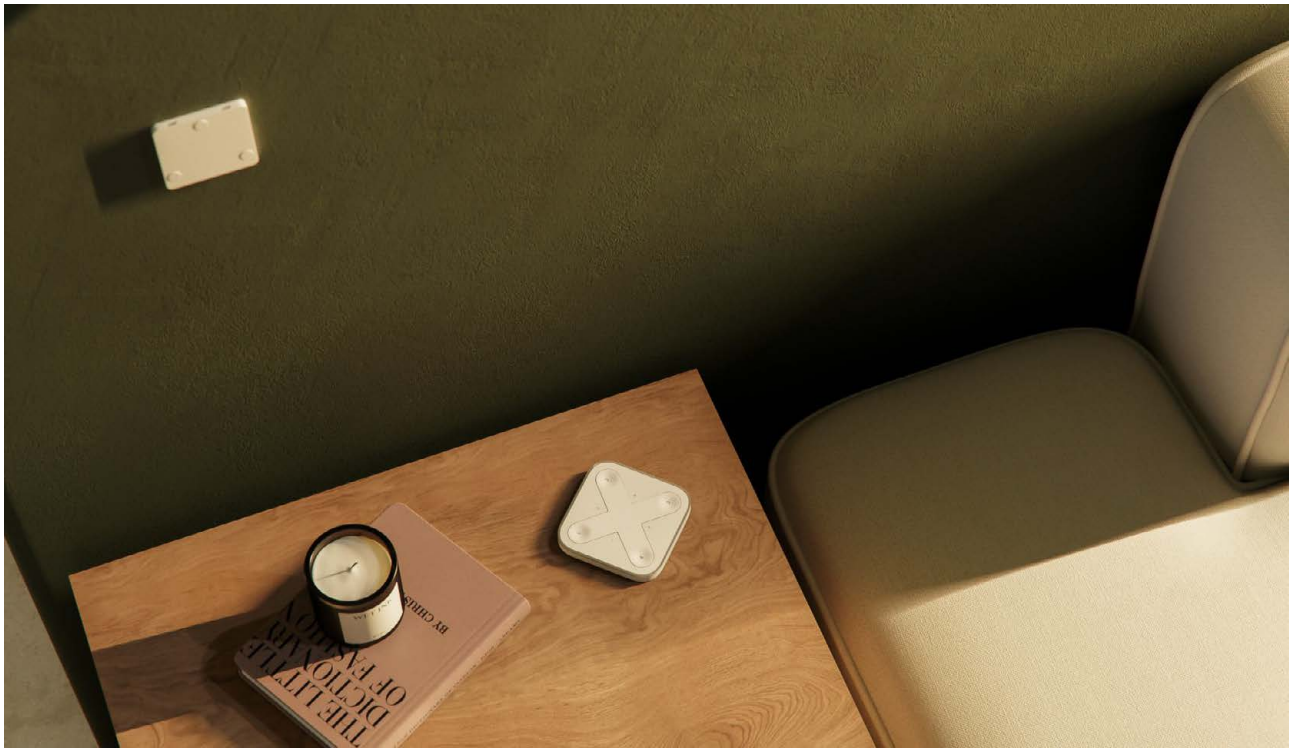
THE LITTLE
DICTIONARY
OF FASHION

## Box 99









*Useful area: 8x3mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 99121 |
| | ■ 99122 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 99440



End Cap
☐ 99621
■ 99622



Suspension Kit Metallic
○ 99721 (2m)
● 99722 (2m)



Joint 90° Metallic
▩ 99510
■ 99512



Joint 90° Metallic
▩ 99540
■ 99542



Joint 180° Metallic
▩ 99520
■ 99522

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 11






*Useful area: 5x10mm.




## Box 12






*Useful area: 5x10mm.




Box 11

Box 12

Compatible led strips.

## Technical Information

| | Box 11 | Box 12 |
|---|---|---|
| Max. power | 15W/m | 15W/m |
| Installation | Recessed | Surface |
| Material | Aluminium | Aluminium |
| Finishes | Aluminium | Aluminium |
| Code | ☐ 11119 | ☐ 12119 |
| | Custom RAL | Custom RAL |

Consult delivery terms and conditions.

### Common accessories



Diffuser PC Opal 70%
☐ 20480

### Box 11 accessories



End Cap
☐ 11633



End Cap
☐ 11623

### Box 12 accessories



Diffuser PC Opal 70%
☐ 20480



End Cap
☐ 12633



End Cap
☐ 12623



Clip
Metallic
☐ 20730

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 13












*Useful area: 12x3mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface / flex |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | ☐ 13113 |

## Accessories



Diffuser PC
Opal 70%
☐ 13480



End Cap
☐ 13633



End Cap
☐ 13623



Clip
Metallic
■ 13330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 10












*Useful area: 12x17,7mm.

Box 10

## Box 19









*Useful area: 12x17,7mm.

Box 19

Compatible led strips.



## Technical Information

| | Box 10 | Box 19 |
|---|---|---|
| Max. power | 25W/m | 25W/m |
| Installation | Recessed | Surface / Pendant |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Aluminium | White / Black / Aluminium |

| Code | Box 10 | Box 19 |
|---|---|---|
| | ☐ 10121 | ☐ 19121 |
| | ■ 10122 | ■ 19122 |
| | ☐ 10119 | ☐ 19119 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

### Common accessories



Diffuser PC Opal 70%
☐ 20490



Diffuser PC Black 50%
■ 20502



Diffuser Continuous
○ 20997



Joint 90° Metallic
☐ 20510



Joint 90° Metallic
☐ 20540



Joint 120° Metallic
☐ 20530



Joint 180° Metallic
☐ 20520

### Box 10 accessories



End Cap
☐ 10621
■ 10622
☐ 10623



Spring Clip Metallic
☐ 20710

### Box 19 accessories



End Cap
☐ 19621
■ 19622
☐ 19623



Clip Metallic
☐ 19330



Suspension Kit Metallic
○ 20720 (2m)



Base 455x47x28mm

| | | | |
|---|---|---|---|
| | ☐ 35331 | ■ 35332 | 30W/24VDC on/off |
| | ☐ 35361 | ■ 35362 | 60W/24VDC on/off |
| | ☐ 35311 | ■ 35312 | 100W/24VDC on/off |
| NEW | ☐ 35351 | ■ 35352 | 150W/24VDC on/off |
| NEW | ☐ 35731 | ■ 35732 | 30W/24VDC dali |
| NEW | ☐ 35761 | ■ 35762 | 60W/24VDC dali |
| NEW | ☐ 35711 | ■ 35712 | 100W/24VDC dali |
| NEW | ☐ 35751 | ■ 35752 | 150W/24VDC dali |

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 37






40mm x L

*Useful area: 23x20mm.

Compatible led strips.

## Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Trimless |
| Material | Aluminium |
| Finishes | White |

| | |
|---|---|
| Code | ☐ 37121 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 37480



End Cap
☐ 37621

CE RoHS

3 YEARS WARRANTY | IP 40 | 2m Max | AL 6063


DEAD IN DEEP WATER
DAVE SIV
Little One
TAKE THAT NURSING HOMES AND SHOVE IT!
TO KILL A MOCKINGB IRD

## Box 24









27mm x L

*Useful area: 12x3mm.

Compatible led strips.



### Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 24121 |
| | ■ 24122 |
| | ▩ 24119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

### Accessories



Diffuser PC Opal 70%
▩ 24440



End Cap
☐ 24631
■ 24632
▩ 24633



End Cap
☐ 24621
■ 24622
▩ 24623



Spring Clip Metallic
▩ 24710

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063



New

## Box 69



16 x L

*Useful area: 10x3mm.







Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Trimless |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | ☐ 69119 |

## Accessories



Diffuser Continuous (max. 20m)
○ 69440



End Cap
☐ 69633



End Cap
☐ 69623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063


2
SHOWROO
TOILET
LIFT
RECEPTIO
HALL

New

## Box 68






25mm x L

*Useful area: 12x3mm.




## Box 32






*Useful area: 12x3mm.




Compatible led strips.



Box 68 Box 32

## Technical Information

| | Box 68 | Box 32 |
|---|---|---|
| Max. power | 20W/m | 20W/m |
| Installation | Trimless | Trimless |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White |
| Code | ☐ 68121<br>■ 68122 | ☐ 32121 |

### Common accessories



Joint 90° Metallic ■ 68450
Joint 90° Metallic ■ 68510
Joint 180° Metallic ■ 68520

### Box 68 accessories



Diffuser Continuous (max. 20m) ○ 68997
Diffuser Continuous (max. 20m) ● 68502
End Cap ☐ 68631 ■ 68632
End Cap ☐ 68621 ■ 68622

### Box 32 accessories



Diffuser PC Opal 70% ☐ 32440
End Cap ☐ 32631
End Cap ☐ 32621

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 22









*Useful area: 12x3mm.

Compatible led strips.

## Technical Information

| | |
|---|---|
| Max. power | 2x15W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | Black / Aluminium |

| Code | |
|---|---|
| | ■ 22122 |
| | □ 22119 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
□ 20497



Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15



End Cap
■ 22622
□ 22623



Clip
Metallic
□ 22330

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 33






*Useful area: 12,6x6,3mm.




Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 20W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 33121 |
| | ■ 33122 |
| | ▩ 33119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
☐ 33440



Diffuser
Silicone Opal 60%
(max. 60m)
○ 20469
○ 20469-15



End Cap
☐ 33621
■ 33622
▩ 33623

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

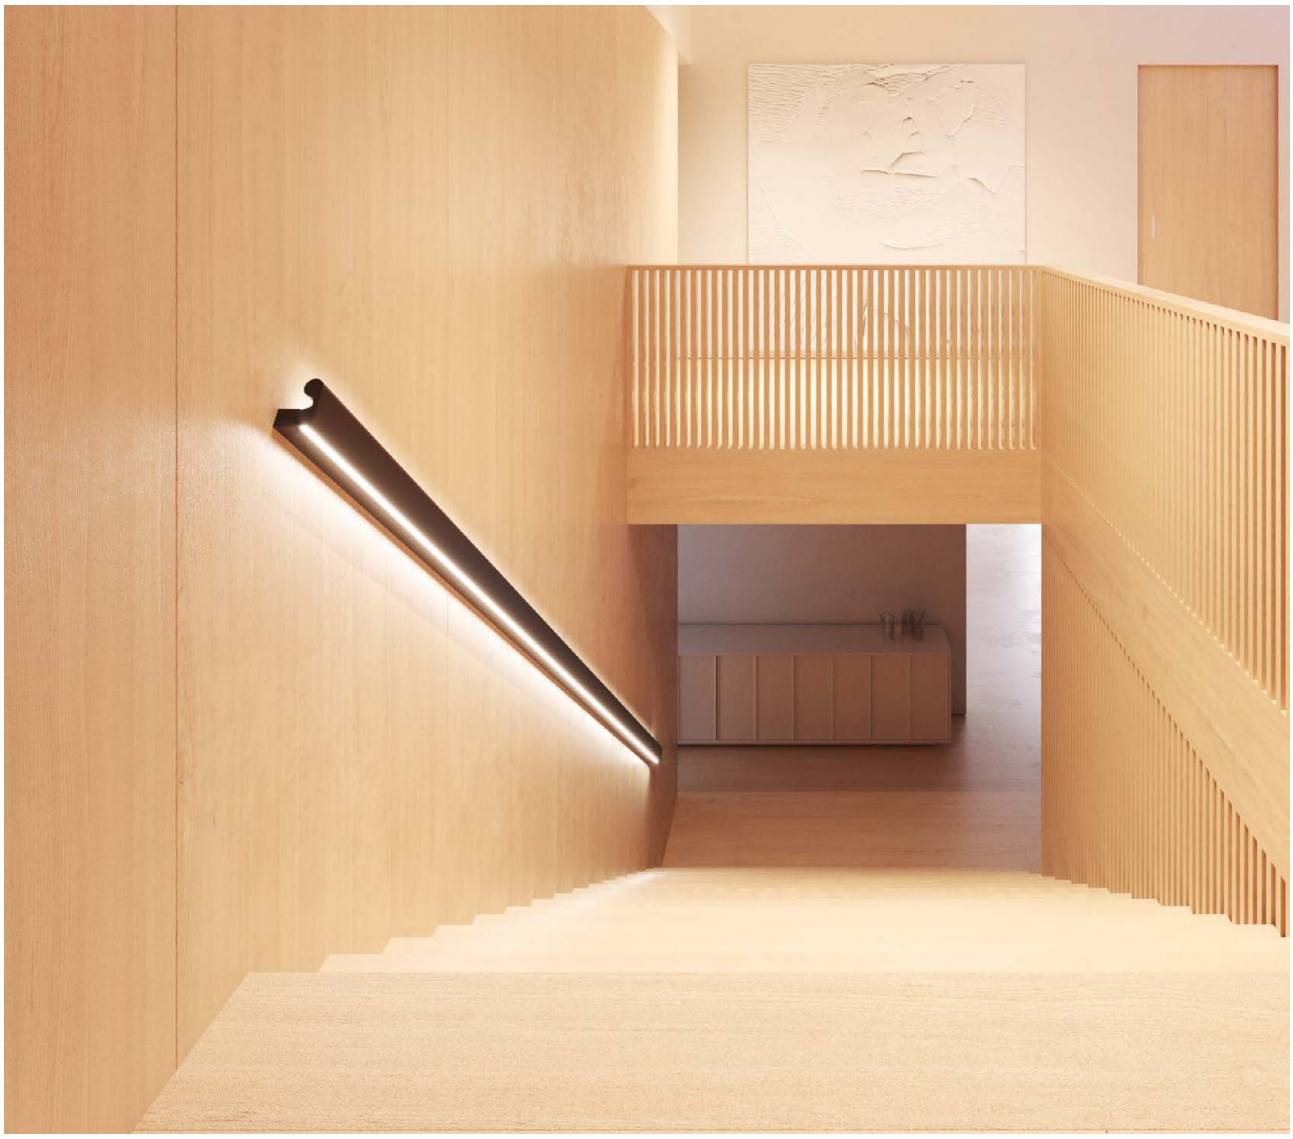

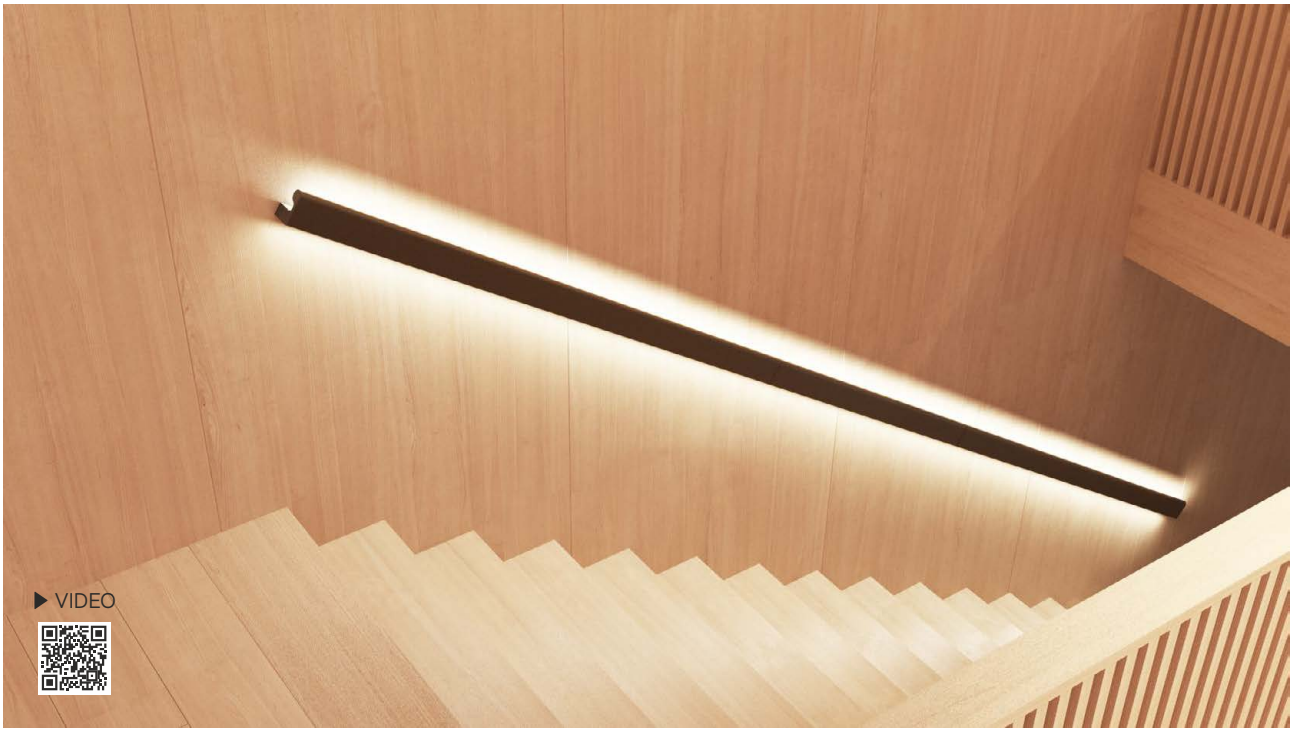
▶ VIDEO

## Box 98 railing









Compatible led strips.



*Useful area: 10x2mm.

## Technical Information

| | |
|---|---|
| Max. power | 30W/m |
| Installation | Surface / railing |
| Material | Aluminium |
| Finishes | Black / White |

| Code | |
|---|---|
| | ○ 98121 |
| | ● 98122 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC (2m)
Opal 70%
□ 98440



End Cap
○ 98621
● 98622

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m | AL 6063

## Box 21









*Useful area: 12x3mm.

Compatible led strips.

## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | White / Aluminium |

| | |
|---|---|
| Code | ☐ 21121 |
| | ☐ 21119 |
| | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
◯ 20469
◯ 20469-15



End Cap
☐ 21631
☐ 21633



End Cap
☐ 21621
☐ 21623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 27









*Useful area: 12x3mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 15W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 27121 |
| | ■ 27122 |
| | ▩ 27119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
☐ 20497



Diffuser Silicone Opal 60% (max. 60m)
○ 20469
○ 20469-15



End Cap left
☐ 27631
■ 27632
▩ 27633



End Cap right
☐ 27621
■ 27622
▩ 27623

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



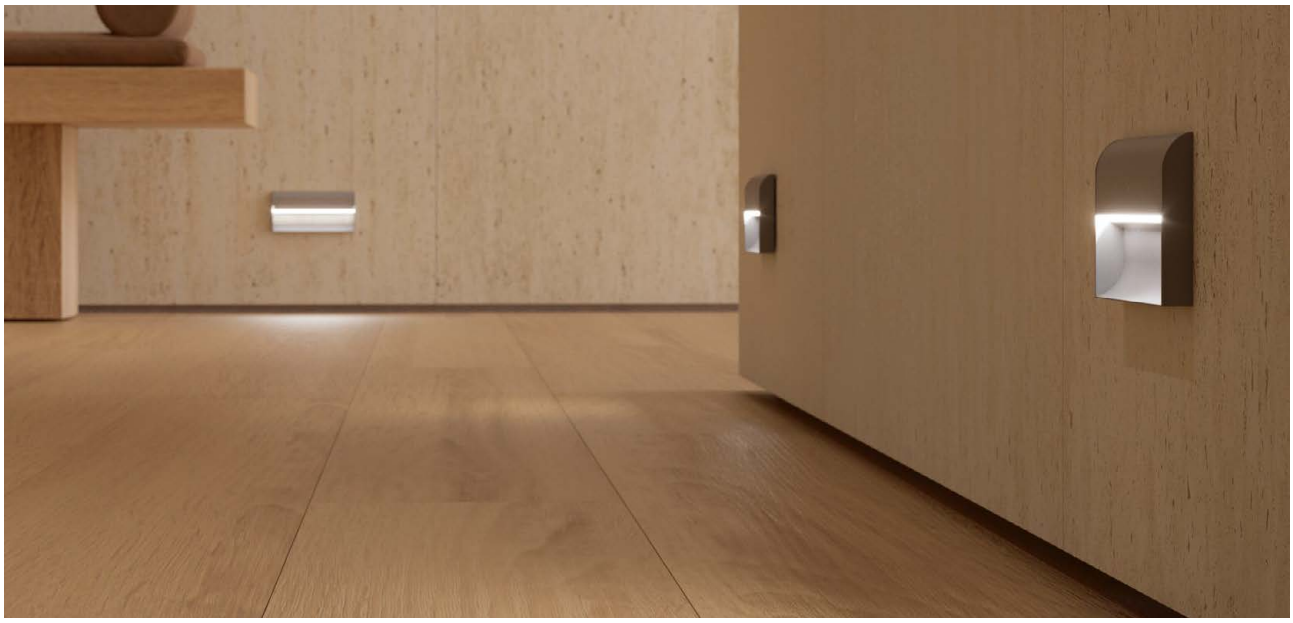

## Box 65



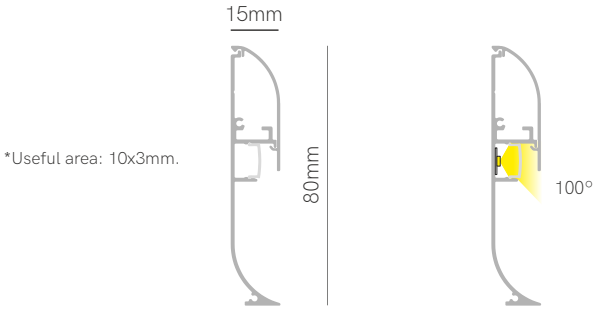


Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 12W/m |
| Installation | Surface / skirting |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 65121 |
| | ■ 65122 |
| | ▩ 65119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
▩ 65440



End Cap x2
☐ 65621
■ 65622
▩ 65623



90° outside connector
☐ 65221
■ 65222
▩ 65223



90° inside connector
☐ 65331
■ 65332
▩ 65333



Joint 180° Metallic
▩ 65550

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

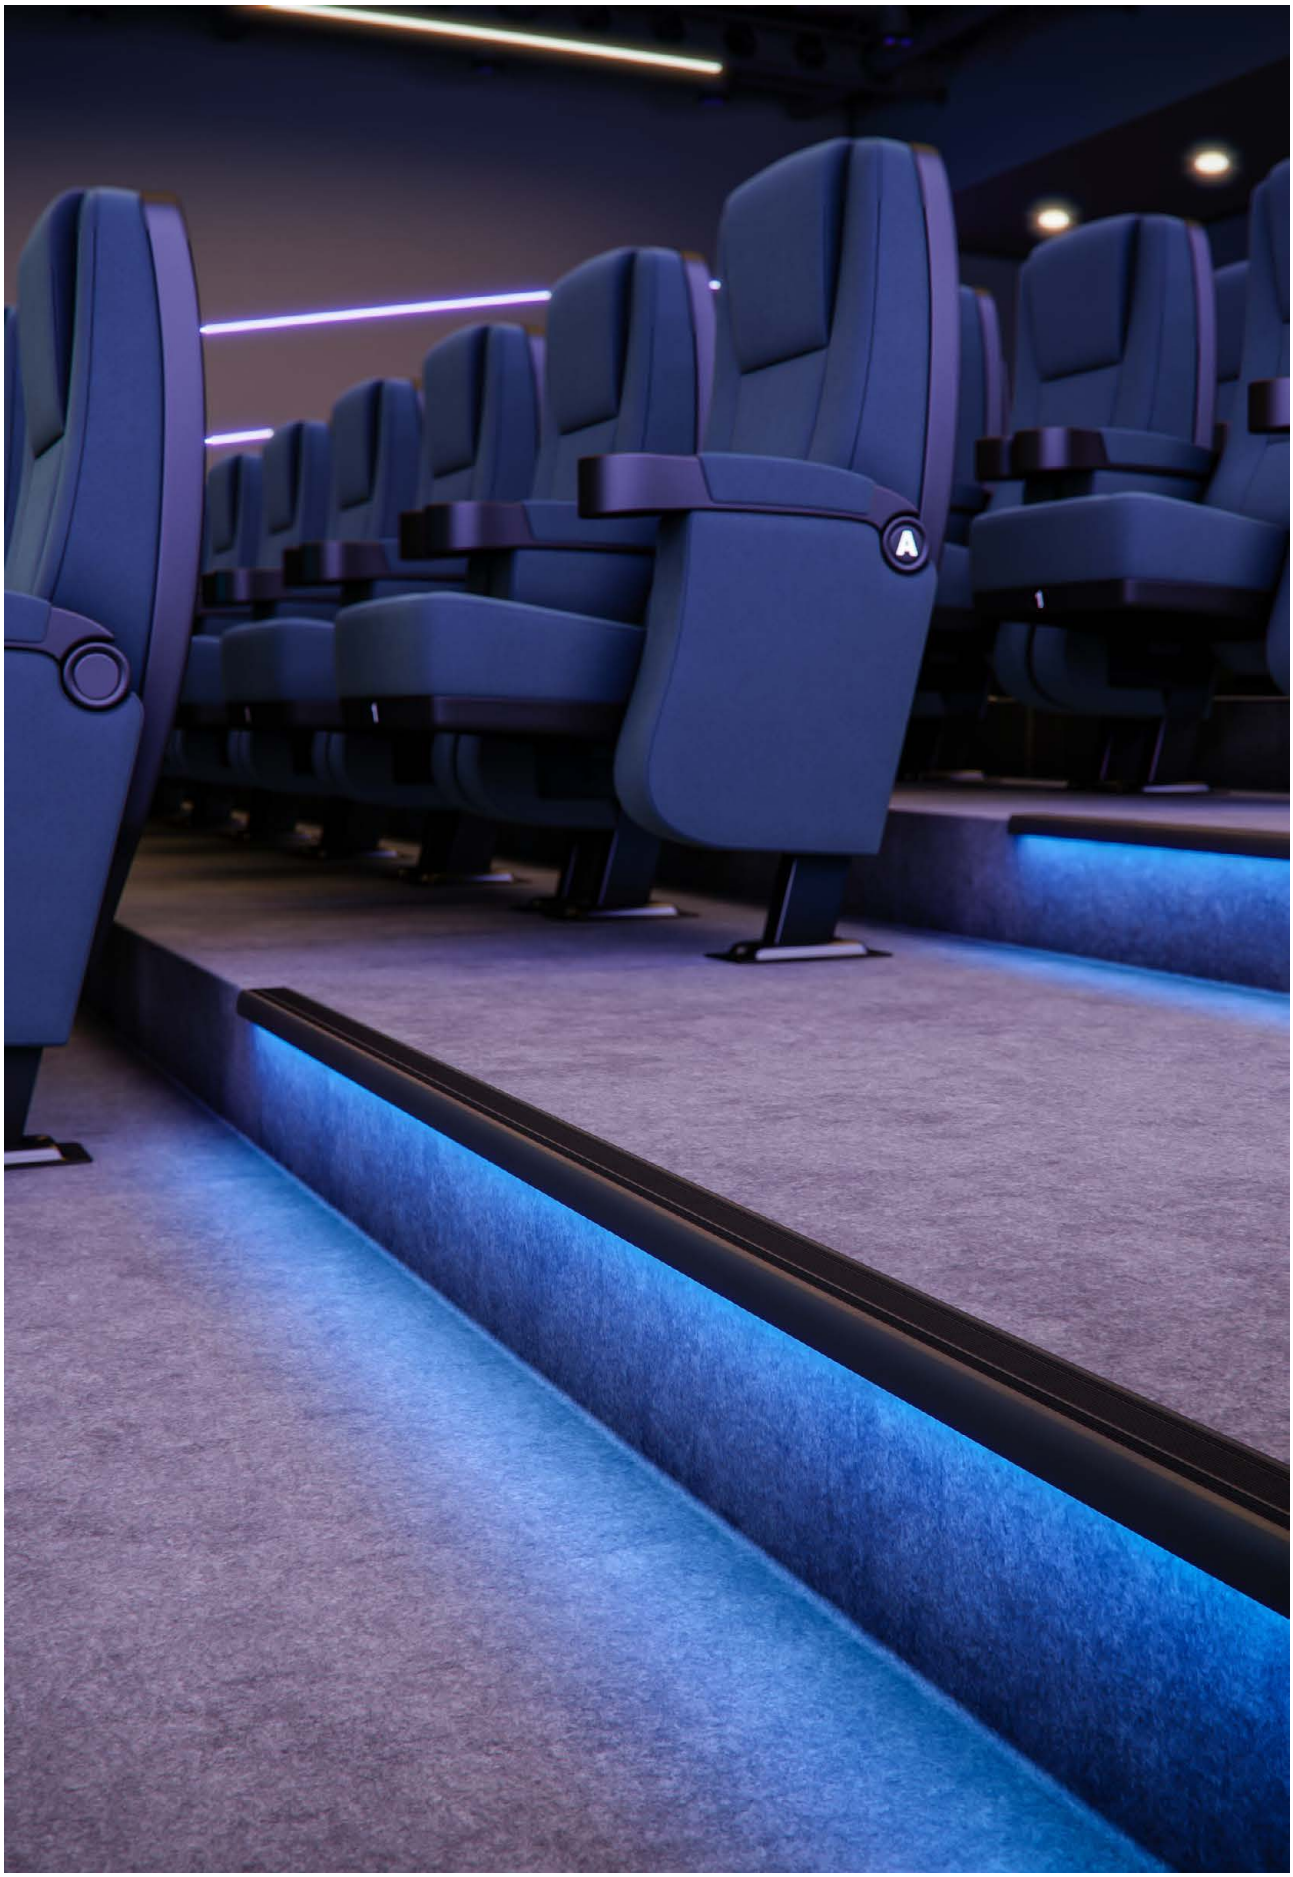

## Box 67









*Useful area: 12x3mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 12W/m |
| Installation | Surface / stairs |
| Material | Aluminium |
| Finishes | Black |

| | |
|---|---|
| Code | ■ 67122 |

## Accessories



Diffuser PC Opal 70%
□ 67440



End Cap
■ 67632



PVC anti-skid cover
■ 67452

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

## Box 39








Opal 90°
Transparent 105°



Optic 30°

*Useful area: 12x8mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Surface / Pendant |
| Material | Aluminium |
| Finishes | Black |

| Code | |
|---|---|
| | ● 39122 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC
Opal 70%
○ 39440



Diffuser PC
Transp. 90%
○ 39450



Diffuser PC
Optic 30%
□ 39430



End Cap
● 39622



Clip
Plastic
○ 25530



Suspension Kit
○ 25887 (2m)



Base 455x47x28mm
□ 35331 (30W/24V) ■ 35332 (30W/24V)
□ 35361 (60W/24V) ■ 35362 (60W/24V)
□ 35311 (100W/24V) ■ 35312 (100W/24V)

CE RoHS

3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

## Box 28









*Useful area: 12x5mm.

Compatible led strips.



### Technical Information

| | |
|---|---|
| Max. power | 40W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | ○ 28119 |

### Accessories



Diffuser PC
Optic 30%
○ 28430



End Cap
○ 28633



End Cap
○ 28623



Clip
Metallic
□ 28330

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063





## Box 29









*Useful area: 12x18mm.

Compatible led strips.



## Technical Information

| | |
|---|---|
| Max. power | 25W/m |
| Installation | Recessed |
| Material | Aluminium |
| Finishes | Aluminium |

| | |
|---|---|
| Code | ☐ 29119 |

## Accessories



Diffuser PC
Opal 70%
☐ 29480



End Cap
☐ 29623

CE RoHS

3 YEARS WARRANTY | IP 55 | IK10 | 1000kg | 2m Max | AL 6063

## Box 73









*Useful area: 12x7mm.

Compatible led strips.

## Technical Information

| | |
|---|---|
| Max. power | 22W/m |
| Installation | Surface |
| Material | Aluminium |
| Finishes | White / Black / Aluminium |

| Code | |
|---|---|
| | ☐ 73121 |
| | ■ 73122 |
| | ▩ 73119 |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Diffuser PC Opal 70%
▩ 73440



End Cap
☐ 73621
■ 73622
▩ 73623



End Cap
☐ 73631
■ 73632
▩ 73633

CE RoHS

3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

## Box 30 12mm






## Box 30 20mm









Compatible led strips.



## Technical Information

| | | |
|---|---|---|
| Max. power | 20W/m | 40W/m |
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | Aluminium | Aluminium |
| Code | ☐ 30129 | ☐ 30209 |

ⓘ Consult delivery terms and conditions.

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



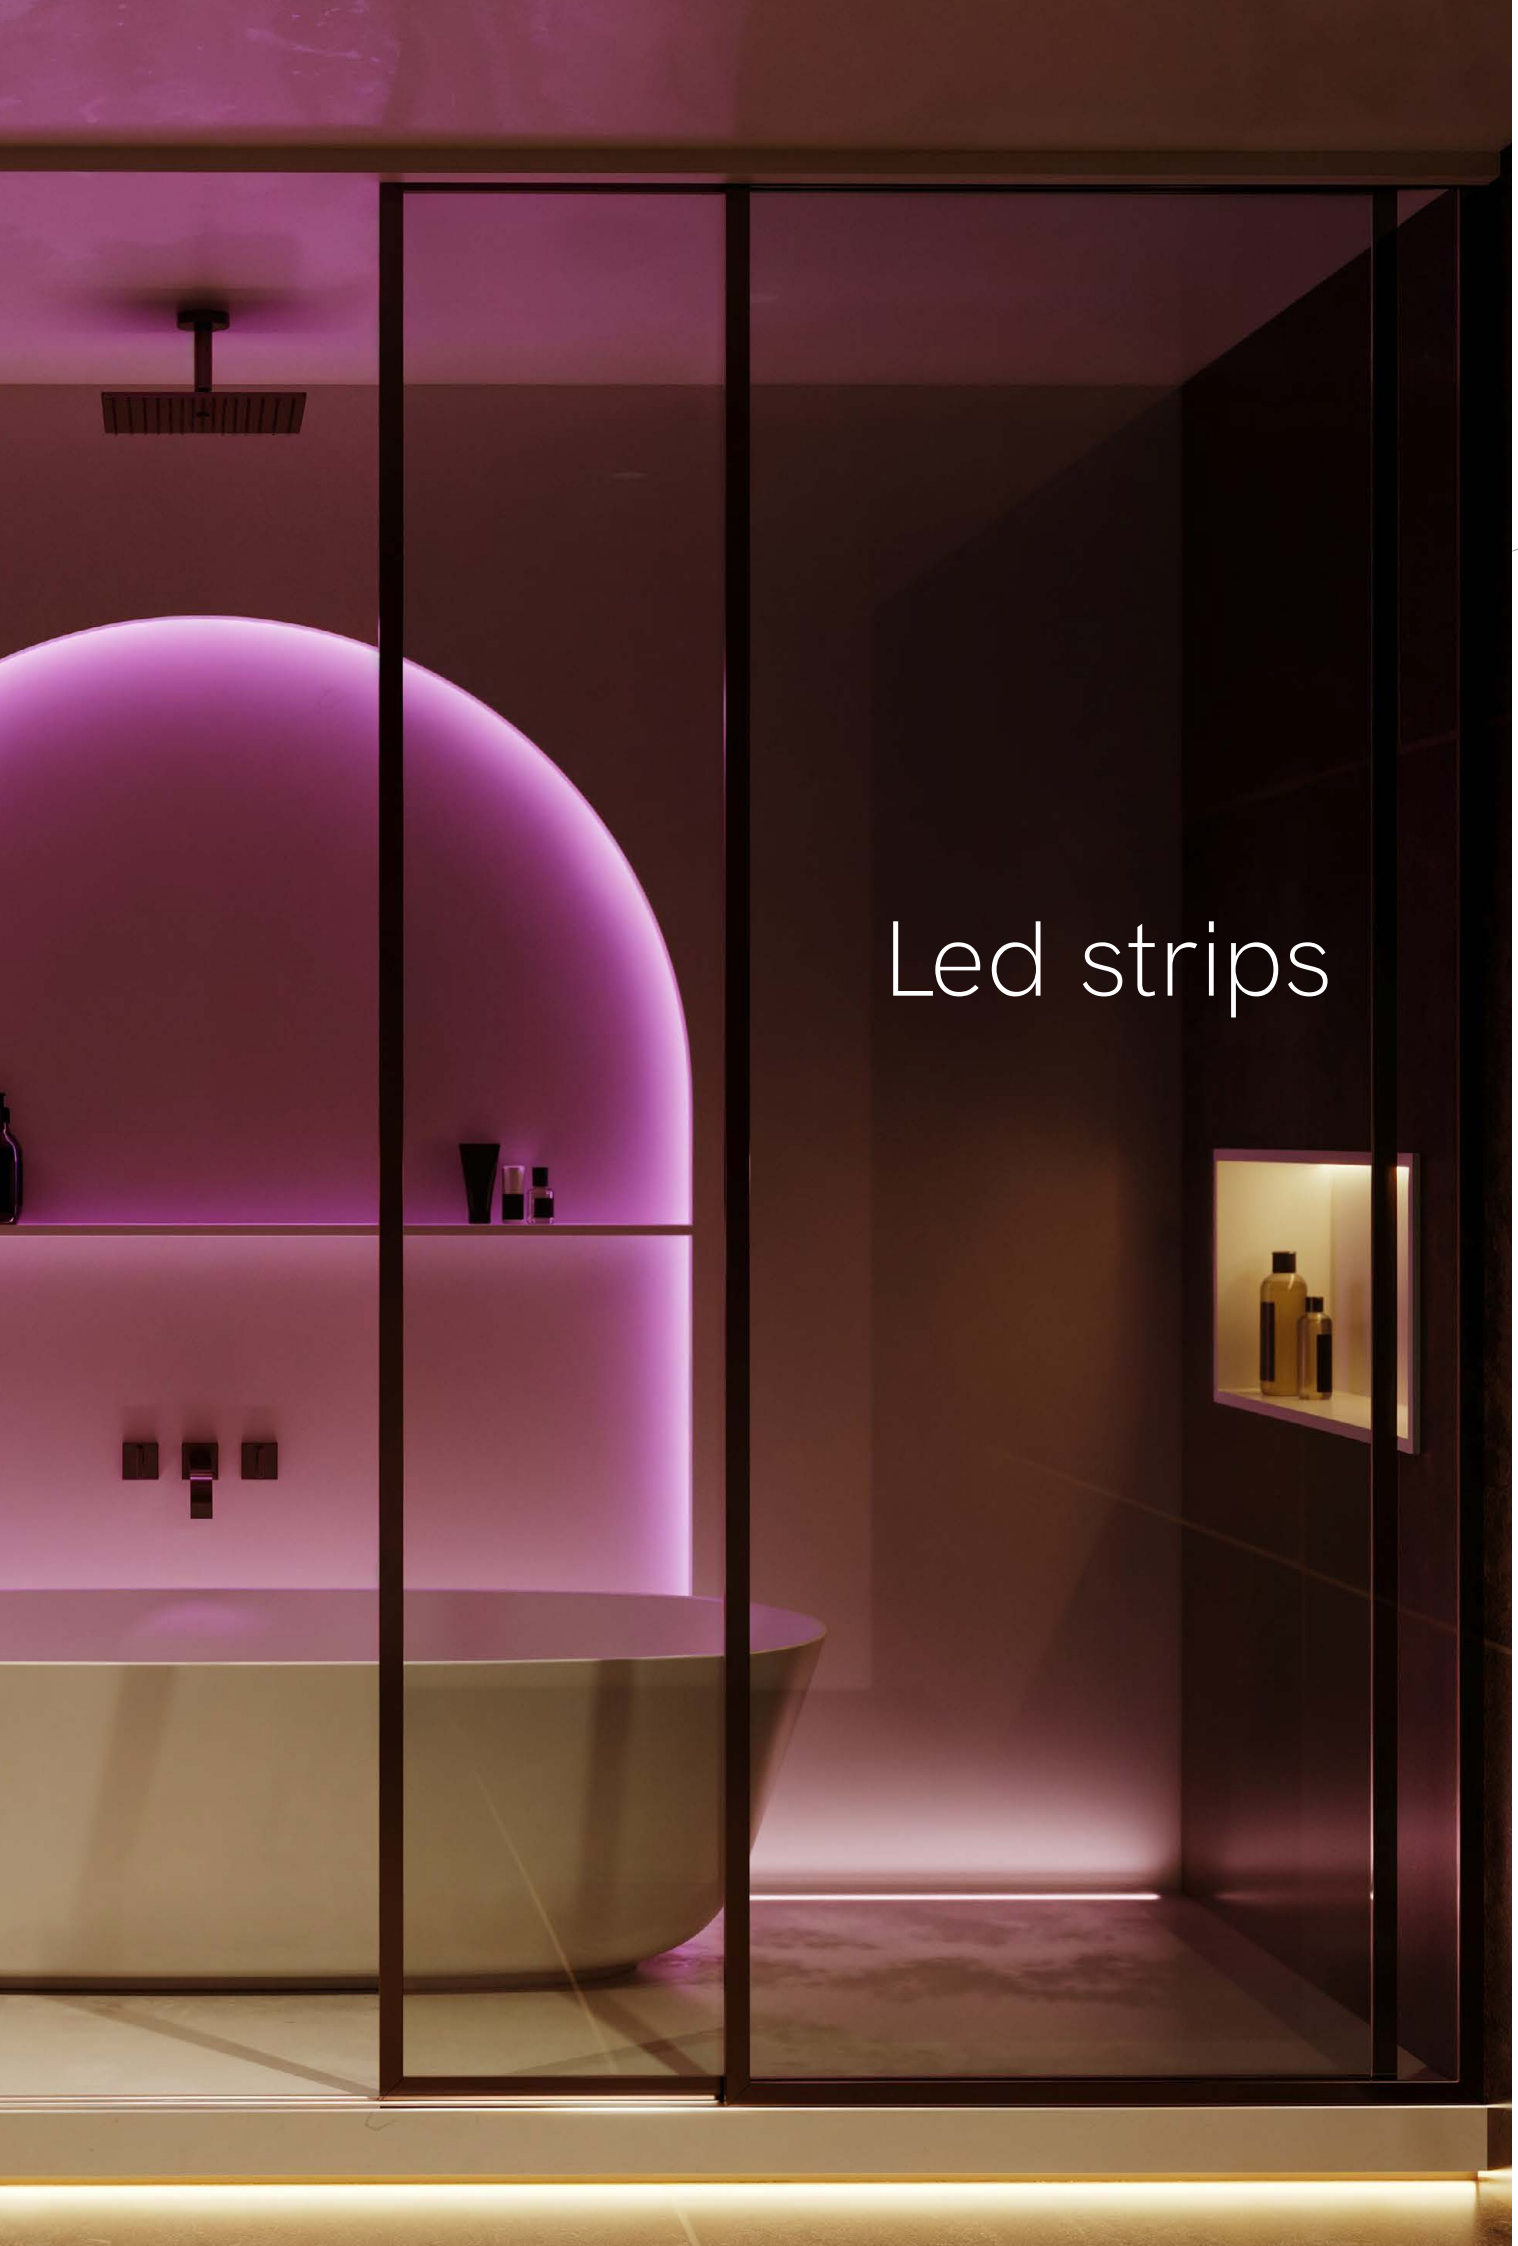

# Led strips

| | Model | Page | Power | Width | CCT |
|---|---|---|---|---|---|
| | FINE 64 | 216 | 2,5W/m | 10mm | 2700K 3000K 4000K |
| | FINE 48 | 217 | 5W/m | 10mm | 2200K 2700K 3000K 4000K |
| NEW | FINE 97 | 219 | 10W/m | 10mm | 2200K |
| | FINE 84 | 220 | 4,8W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 69 | 221 | 9,6W/m | 10mm | 2200K 2700K 3000K 4000K 6000K |
| | FINE 41 | 222 | 14,4W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 31 | 223 | 12W/m | 10mm | 2200K 2700K 3000K 4000K |
| NEW | FINE 92 | 224 | 10W/m | 8mm | 2700K 3000K 4000K |
| NEW | FINE 82 | 225 | 15W/m | 8mm | 2700K 3000K 4000K |
| NEW | FINE 68 | 226 | 19,2W/m | 10mm | 2700K 3000K 4000K |
| NEW | FINE 79 | 227 | 10W/m | 8mm | 2700K 3000K 4000K |
| | FINE 61 | 228 | 15W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 76 | 229 | 15W/m | 12mm | 3000K 4000K |
| | FINE 52 | 231 | 22W/m | 10mm | 2700K 3000K 4000K 6000K |
| | FINE 96 | 233 | 18W/m | 18,5mm | 3000K 4000K RGB-W |
| | FINE 56 | 234 | 22W/m | 15mm | 2700K 3000K 4000K CCT |
| NEW | FINE 30 | 235 | 30W/m | 20mm | 2700K 3000K 4000K |
| | FINE 51 | 237 | 9,6W/m | 10mm | 2700K 3000K 4000K 6000K |
| NEW | FINE 75 | 238 | 7W/m | 12mm | 2700K 3000K 4000K |
| | FINE 32 N | 239 | 15W/m | 12mm | 2700K 3000K 4000K 6000K |
| NEW | FINE 88 | 240 | 12W/m | 5mm | 2200K 2700K 3000K 4000K |
| | FINE 49 | 241 | 10W/m | 4mm | 2700K 3000K 4000K 6000K |
| | FINE 55 | 242 | 24W/m | 20mm | 2700K 3000K 4000K |
| NEW | FINE 37 | 243 | 14,4W/m | 10mm | 2700K 3000K 4000K |
| | FINE 44 | 245 | 14,4W/m | 10mm | MEAT FISH FRUIT BREAD |

| Lumens | CRI | Density | Voltage | IP20 | IP65 | IP67 |
|---|---|---|---|---|---|---|
| 110-120 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC | | - | - |
| 110-135 Lm/W | ≥90 CRI | 160 LED/m | 24 VDC | | - | - |
| 140 Lm/W | - | 160 LED/m | 24 VDC | | - | - |
| 95-102 Lm/W | ≥90 CRI | 70 LED/m | 24 VDC | | | - |
| 87-102 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC | | | - |
| 92-102 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC | | | - |
| 85-100 Lm/W | ≥90 CRI | 512 LED/m | 24 VDC | | - | |
| 80-90 Lm/W | ≥97 CRI | 320 LED/m | 24 VDC | | - | - |
| 65-70 Lm/W | ≥90 CRI | 480 LED/m | 24 VDC | | - | - |
| 130-140 Lm/W | ≥90 CRI | 200 LED/m | 24 VDC | | - | - |
| 170-180 Lm/W | ≥80 CRI | 160 LED/m | 24 VDC | | | - |
| 110-125 Lm/W | ≥90 CRI | 160 LED/m | 24 VDC | | | - |
| 120-128 Lm/W | ≥80 CRI | 126 LED/m | 24 VDC | | - | - |
| 97-112 Lm/W | ≥90 CRI | 238 LED/m | 24 VDC | | | |
| 67,5-120 Lm/W | ≥90 CRI | 48 LED/m | 24 VDC | - | | |
| 130-170 Lm/W | ≥80 CRI | 160 LED/m | 24 VDC | | - | - |
| 150-160 Lm/W | ≥90 CRI | 352 LED/m | 24 VDC | | - | - |
| 100 Lm/W | ≥90 CRI | 120 LED/m | 24 VDC | | - | |
| 100-110 Lm/W | ≥80 CRI | 120 LED/m | 220/240 VDC | - | | - |
| 100-110 Lm/W | ≥80 CRI | 112 LED/m | 220/240 VDC | - | | - |
| 90-110 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC | | - | - |
| 71-77 Lm/W | ≥90 CRI | 204 LED/m | 24 VDC | | - | - |
| 80-86 Lm/W | ≥90 CRI | 120 LED/m | 24 VDC | | - | - |
| 126-140 Lm/W | ≥90 CRI | 160 LED/m | 48 VDC | | - | - |
| 85-95 Lm/W | 75/97 CRI | 140 LED/m | 24 VDC | | - | - |

| | Model | Page | Power | Width | CCT |
|---|---|---|---|---|---|
| | FINE 63 | 247 | 19W/m | 10mm | CCT |
| | FINE 36 | 248 | 12W/m | 10mm | CCT |
| | FINE 42 | 249 | 19,2W/m | 10mm | CCT |
| | FINE 54 | 251 | 14W/m | 10mm | RGB |
| | FINE 46 | 253 | 14,4W/m | 10mm | RGB |
| | FINE 43 | 254 | 19,2W/m | 12mm | RGB |
| | FINE 50 | 255 | 9,6W/m | 5mm | RGB |
| NEW | FINE 60 | 257 | 8W/m | 12mm | RGB |
| NEW | FINE 66 N | 259 | 20W/m | 12mm | RGB-W |
| | FINE 71 | 261 | 21W/m | 12mm | RGB WW |
| | FINE 47 | 262 | 14,4W/m | 12mm | RGB-W |
| | FINE 45 | 263 | 10W/m | 10mm | RED GREEN BLUE |
| | FINE RUNNING | 265 | 12W/m | 10mm | 3000K 4000K |
| | FINE SPI-2 | 267 | 14W/m | 10mm | RGB |
| | FINE SPI-3 | 269 | 11W/m | 10mm | RGB-W |
| | FINE SPI-4 | 271 | 20W/m | Ø25mm | RGB |
| | FINE DMX-4 | 273 | 12W/m | 12mm | RGB |
| | FINE DMX-5 | 275 | 17W/m | 12mm | RGB-W |
| | FINE 25 | 279 | 20W/m | Ø25mm | 2400K 2700K 3000K 4000K CCT RGB |
| NEW | FINE 34 | 281 | 5W/m | 6mm | 2700K 3000K 4000K |
| NEW | FINE 77 | 283 | 8W/m | 19mm | 2700K 3000K 4000K RGB |
| | FINE 70 | 285 | 5W/m | 12,8mm | 2700K 3000K 4000K RGB |
| | FINE 72 | 287 | 10W/m | 16mm | 2700K 3000K 4000K RGB |
| | FINE 74 | 289 | 10W/m | 24mm | 2700K 3000K 4000K RGB |

| Lumens | CRI | Density | Voltage | IP20 | IP65 | IP67 |
|---|---|---|---|---|---|---|
| 89-95 Lm/W | ≥90 CRI | 640 LED/m | 24 VDC | | - | |
| 100 Lm/W | ≥90 CRI | 140 LED/m | 24 VDC | | - | - |
| 90 Lm/W | ≥90 CRI | 168 LED/m | 24 VDC | | | - |
| 45-50 Lm/W | - | 120 LED/m | 24 VDC | | - | |
| 38-41 Lm/W | - | 144 LED/m | 24 VDC | | | - |
| 90 Lm/W | - | 240 LED/m | 24 VDC | | - | - |
| 58 Lm/W | - | 120 LED/m | 24 VDC | | - | - |
| 81 Lm/W | - | 60 LED/m | 24 VDC | | - | - |
| 167 Lm/W | - | 840 LED/m | 24 VDC | | - | |
| 29-117 Lm/W | - | 96 LED/m | 24 VDC | | - | |
| 18-60 Lm/W | - | 60 LED/m | 24 VDC | | - | - |
| 15-91 Lm/W | - | 480 LED/m | 24 VDC | | - | |
| 79-87 Lm/W | ≥90 CRI | 360 LED/m | 24 VDC | | - | - |
| 37 Lm/W | - | 84 LED/m | 24 VDC | | - | - |
| 51 Lm/W | - | 60 LED/m | 24 VDC | | - | - |
| 12,5 Lm/W | - | 168 LED/m | 24 VDC | - | - | |
| 42 Lm/W | - | 70 LED/m | 24 VDC | | - | |
| 50 Lm/W | - | 70 LED/m | 24 VDC | | - | |
| 41-73 Lm/W | ≥90 CRI | 240-480 LED/m | 24 VDC | - | - | |
| 28-32 Lm/W | ≥90 CRI | 196 LED/m | 24 VDC | - | - | |
| 26-55 Lm/W | ≥90 CRI | 120 LED/m | 24 VDC | - | - | |
| 15-37 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - | |
| 26-65 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - | |
| 22-65 Lm/W | ≥90 CRI | 96/140 LED/m | 24 VDC | - | - | |

## Fine 64




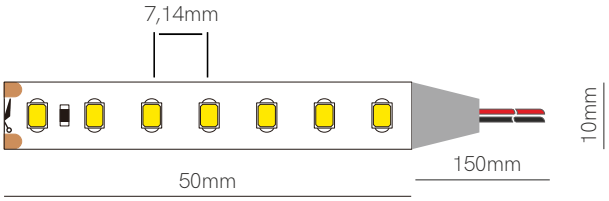





Compatible profiles.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,1A / 2,5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 64270 | 110 lm/w | 275 lm/m | 2700K | IP20 |
| | 64300 | 115 lm/w | 287 lm/m | 3000K | IP20 |
| | 64400 | 120 lm/w | 300 lm/m | 4000K | IP20 |

### Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 10 meters.

Accessories pages 294-311.

RoHS

5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

## Fine 48




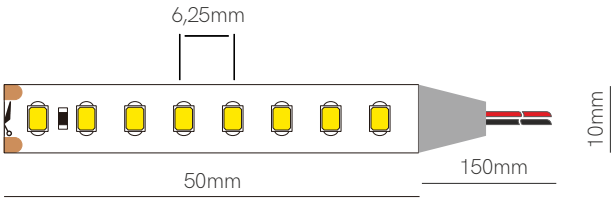





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,2A / 5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 48220 | 110 lm/w | 550 lm/m | 2200K | IP20 |
| | 48270 | 120 lm/w | 600 lm/m | 2700K | IP20 |
| | 48300 | 130 lm/w | 650 lm/m | 3000K | IP20 |
| | 48400 | 135 lm/w | 675 lm/m | 4000K | IP20 |
| | 48225 New | 110 lm/w | 550 lm/m | 2200K | IP65 |
| | 48275 New | 120 lm/w | 600 lm/m | 2700K | IP65 |
| | 48305 New | 130 lm/w | 650 lm/m | 3000K | IP65 |
| | 48405 New | 135 lm/w | 675 lm/m | 4000K | IP65 |

### Accessories



End Cap
20635



End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999

*Available in reel of 10 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 5 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835


+24V BENEITO FAURE

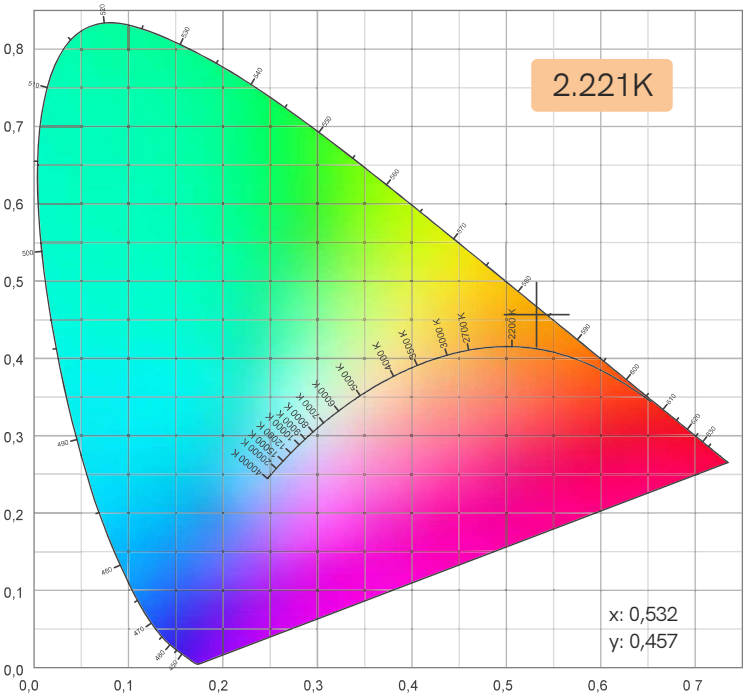
2.221K
x: 0,532
y: 0,457
0,0
0,1
0,2
0,3
0,4
0,5
0,6
0,7
0,8

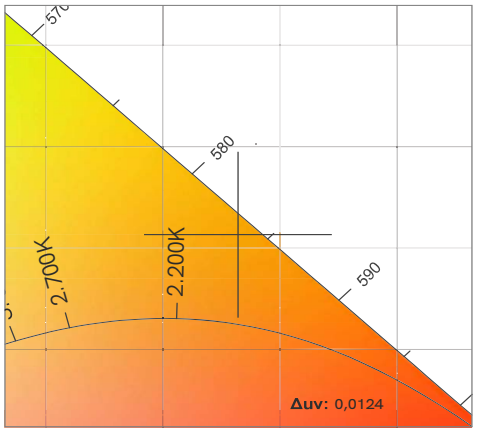
570
580
590
2.700K
2.200K
Δuv: 0,0124

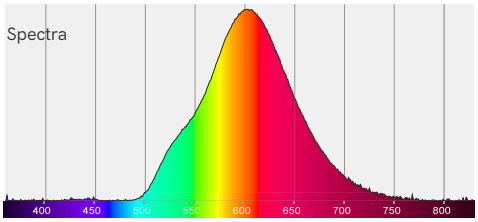
Spectra
400
450
500
550
600
650
700
750
800

New

## Fine 97



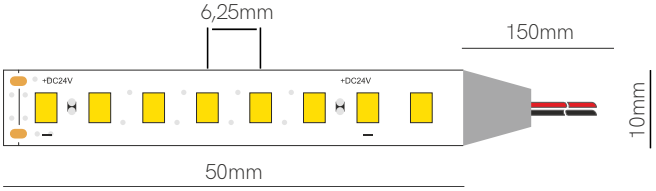





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 10W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 97220 | 140 lm/w | 1.400 lm/m | 2200K | IP20 |

## Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 160 LED/m | 24 VDC | 50mm | 2835

## Fine 84




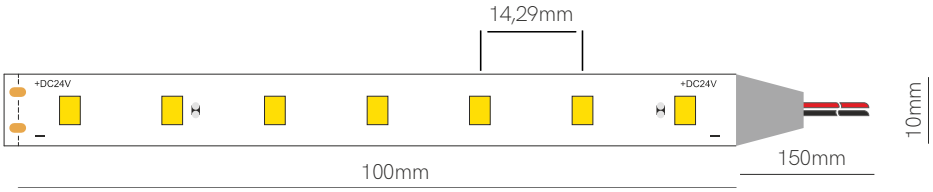





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,2A / 4,8W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 84270 | 95 lm/w | 456 lm/m | 2700K | IP20 |
| | 84300 | 98 lm/w | 470 lm/m | 3000K | IP20 |
| | 84400 | 100 lm/w | 480 lm/m | 4000K | IP20 |
| | 84600 | 102 lm/w | 489 lm/m | 6000K | IP20 |
| | 84275 | 90 lm/w | 432 lm/m | 2700K | IP65 |
| | 84305 | 92 lm/w | 441 lm/m | 3000K | IP65 |
| | 84405 | 95 lm/w | 456 lm/m | 4000K | IP65 |
| | 84605 | 97 lm/w | 465 lm/m | 6000K | IP65 |

### Accessories



End Cap
20635



End Cap
20625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
24,3x14,6x7,7mm
20225



Joint
24,3x14,6x7,7mm
20125



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 4,8 W/m | 70 LED/m | CRI ≥90 | 24 VDC | 100mm | 2835

## Fine 69




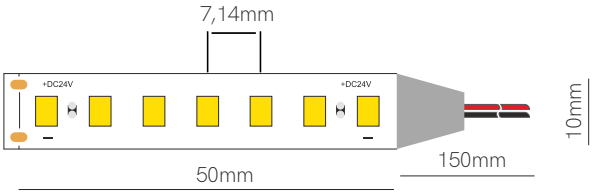





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| Code | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| | 69220 | 87 lm/w | 835 lm/m | 2200K | IP20 |
| | 69270 | 95 lm/w | 912 lm/m | 2700K | IP20 |
| | 69300 | 98 lm/w | 940 lm/m | 3000K | IP20 |
| | 69400 | 100 lm/w | 960 lm/m | 4000K | IP20 |
| | 69600 | 102 lm/w | 979 lm/m | 6000K | IP20 |
| | 69225 | 87 lm/w | 835 lm/m | 2200K | IP65 |
| | 69275 | 90 lm/w | 864 lm/m | 2700K | IP65 |
| | 69305 | 92 lm/w | 883 lm/m | 3000K | IP65 |
| | 69405 | 95 lm/w | 912 lm/m | 4000K | IP65 |
| | 69605 | 97 lm/w | 931 lm/m | 6000K | IP65 |

### Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125



Joint
15,4x11,5x5,7mm
□ 20991



Joint
21,6x11,5x5,7mm
□ 20999

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 9,6 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

## Fine 41




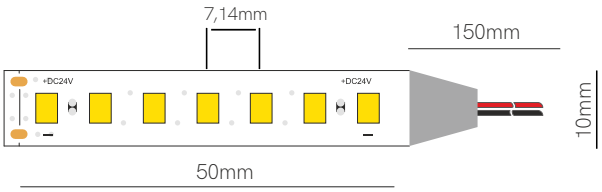





Compatible profiles.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 41270 | 95 lm/w | 1.368 lm/m | 2700K | IP20 |
| | 41300 | 98 lm/w | 1.411 lm/m | 3000K | IP20 |
| | 41400 | 100 lm/w | 1.440 lm/m | 4000K | IP20 |
| | 41600 | 102 lm/w | 1.468 lm/m | 6000K | IP20 |
| | 41275 | 90 lm/w | 1.296 lm/m | 2700K | IP65 |
| | 41305 | 92 lm/w | 1.324 lm/m | 3000K | IP65 |
| | 41405 | 95 lm/w | 1.368 lm/m | 4000K | IP65 |
| | 41605 | 97 lm/w | 1.396 lm/m | 6000K | IP65 |

### Accessories


End Cap
20635


End Cap
20625


Joint
13,8x11,55x3,9mm
20220


Joint
13,55x11,67x4,7mm
20120


Joint
24,3x14,6x7,7mm
20225


Joint
24,3x14,6x7,7mm
20125


Joint
15,4x11,5x5,7mm
20991


Joint
21,6x11,5x5,7mm
20999

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

## Fine 31




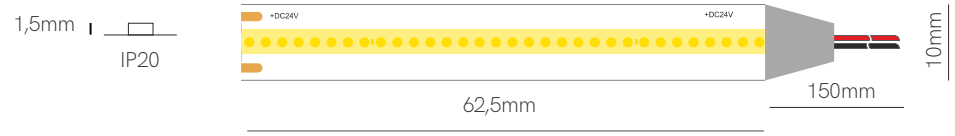


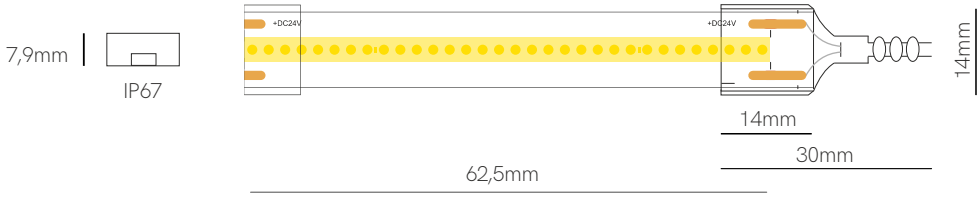


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 31220 | 85 lm/w | 1.020 lm/m | 2200K | IP20 |
| | 31270 | 95 lm/w | 1.140 lm/m | 2700K | IP20 |
| | 31300 | 98 lm/w | 1.176 lm/m | 3000K | IP20 |
| | 31400 | 100 lm/w | 1.200 lm/m | 4000K | IP20 |
| | 31227 | 80 lm/w | 960 lm/m | 2200K | IP67 |
| | 31277 | 90 lm/w | 1.080 lm/m | 2700K | IP67 |
| | 31307 | 93 lm/w | 1.116 lm/m | 3000K | IP67 |
| | 31407 | 95 lm/w | 1.140 lm/m | 4000K | IP67 |

## Accessories



End Cap ☐ 32635
End Cap ☐ 32625
Joint ☐ 31709
Joint ☐ 31809
Joint ☐ 31909

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 12 W/m | 512 LED/m | CRI ≥90 | 24 VDC | 62,5mm | COB

New

## Fine 92




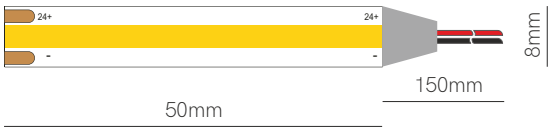





Compatible profiles.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,42A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 92270 | 80 lm/w | 800 lm/m | 2700K | IP20 |
| | 92300 | 85 lm/w | 850 lm/m | 3000K | IP20 |
| | 92400 | 90 lm/w | 900 lm/m | 4000K | IP20 |

## Accessories



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909



L Joint
19x12x5mm
☐ 20C90 New



L Joint
19x19x5mm
☐ 20T90 New

*Available in reel of 10 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 320 LED/m | CRI ≥97 | 24 VDC | 50mm | COB

New

## Fine 82



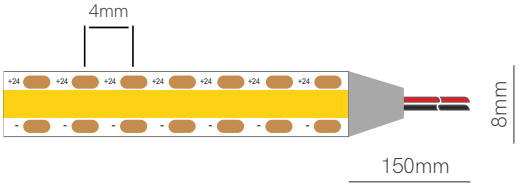





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,63A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 82270 | 65 lm/w | 650 lm/m | 2700K | IP20 |
| | 82300 | 65 lm/w | 650 lm/m | 3000K | IP20 |
| | 82400 | 70 lm/w | 700 lm/m | 4000K | IP20 |

## Accessories



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909

*Available in reel of 10 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 480 LED/m | CRI ≥90 | 24 VDC | Free cut | COB

New

## Fine 68




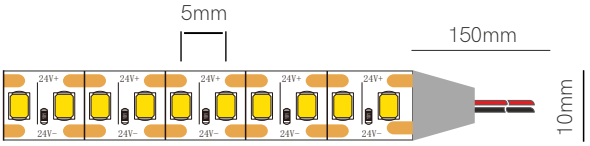





Compatible profiles.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,8A / 19,2W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 68270 | 130 lm/w | 2.496 lm/m | 2700K | IP20 |
| | 68300 | 135 lm/w | 2.592 lm/m | 3000K | IP20 |
| | 68400 | 140 lm/w | 2.688 lm/m | 4000K | IP20 |

## Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters.

Accessories pages 294-311.

RoHS

5 YEARS WARRANTY | 19,2 W/m | 200 LED/m | CRI ≥90 | III | 24 VDC | Free cut | 2835

New

## Fine 79



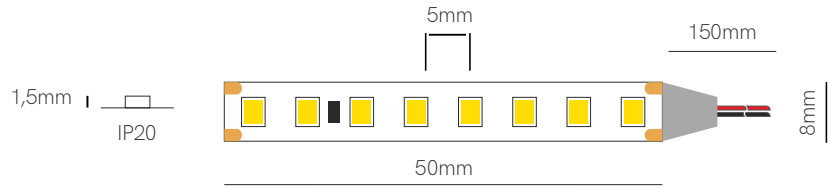


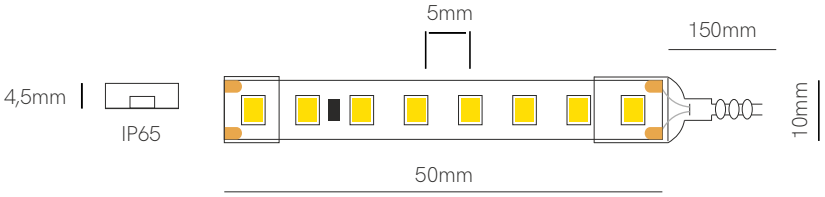


Compatible profiles.



### Technical Information

| V / A / W | 24V / 0,42A / 10W/m |
|---|---|

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 79270 | 170 lm/w | 1.700 lm/m | 2700K | IP20 |
| | 79300 | 175 lm/w | 1.750 lm/m | 3000K | IP20 |
| | 79400 | 180 lm/w | 1.800 lm/m | 4000K | IP20 |
| | 79275 | 170 lm/w | 1.700 lm/m | 2700K | IP65 |
| | 79305 | 175 lm/w | 1.750 lm/m | 3000K | IP65 |
| | 79405 | 180 lm/w | 1.800 lm/m | 4000K | IP65 |

### Accessories



End Cap
☐ 32635



End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50mm | 2835

## Fine 61




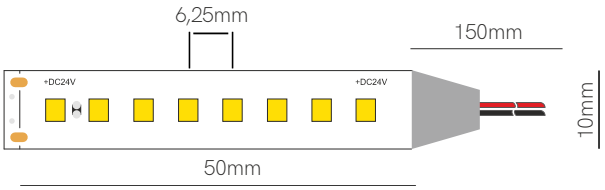





Compatible profiles.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,62A / 15W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 61270 | 110 lm/w | 1.650 lm/m | 2700K | IP20 |
| | 61300 | 115 lm/w | 1.725 lm/m | 3000K | IP20 |
| | 61400 | 120 lm/w | 1.800 lm/m | 4000K | IP20 |
| | 61600 | 125 lm/w | 1.875 lm/m | 6000K | IP20 |
| | 61275 | 110 lm/w | 1.650 lm/m | 2700K | IP65 |
| | 61305 | 115 lm/w | 1.725 lm/m | 3000K | IP65 |
| | 61405 | 120 lm/w | 1.800 lm/m | 4000K | IP65 |
| | 61605 | 125 lm/w | 1.875 lm/m | 6000K | IP65 |

## Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
□ 20220



Joint
13,55x11,67x4,7mm
□ 20120



Joint
24,3x14,6x7,7mm
□ 20225



Joint
24,3x14,6x7,7mm
□ 20125



Joint
15,4x11,5x5,7mm
□ 20991



Joint
21,6x11,5x5,7mm
□ 20999

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 15 W/m | 160 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

## Fine 76




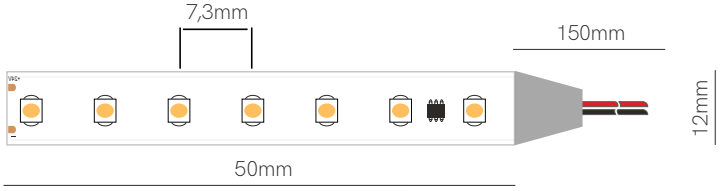








Integrated optics

Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,62A / 15W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 76300 | 120 lm/w | 1.800 lm/m | 3000K | IP20 |
| | 76400 | 128 lm/w | 1.920 lm/m | 4000K | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 15 W/m | 126 LED/m | CRI ≥80 | III | 24 VDC | 50mm | 2835 LENS



## Fine 52




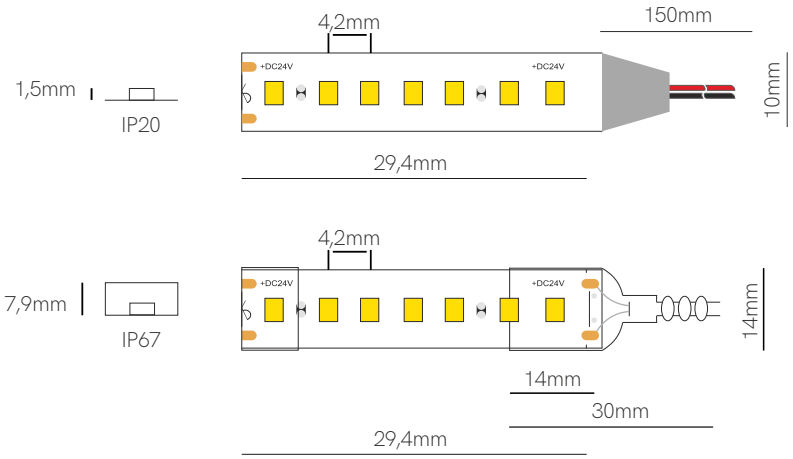


Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,91A / 22W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 52270 | 97 lm/w | 2.134 lm/m | 2700K | IP20 |
| | 52300 | 103 lm/w | 2.266 lm/m | 3000K | IP20 |
| | 52400 | 108 lm/w | 2.376 lm/m | 4000K | IP20 |
| | 52600 | 112 lm/w | 2.464 lm/m | 6000K | IP20 |
| | 52277 | 97 lm/w | 2.134 lm/m | 2700K | IP67 |
| | 52307 | 103 lm/w | 2.266 lm/m | 3000K | IP67 |
| | 52407 | 108 lm/w | 2.376 lm/m | 4000K | IP67 |
| | 52607 | 112 lm/w | 2.464 lm/m | 6000K | IP67 |

### Accessories



End Cap
☐ 32635



End Cap
☐ 32625



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 22 W/m | 238 LED/m | CRI ≥90 | 24 VDC | 29,4mm | 2835



## Fine 96



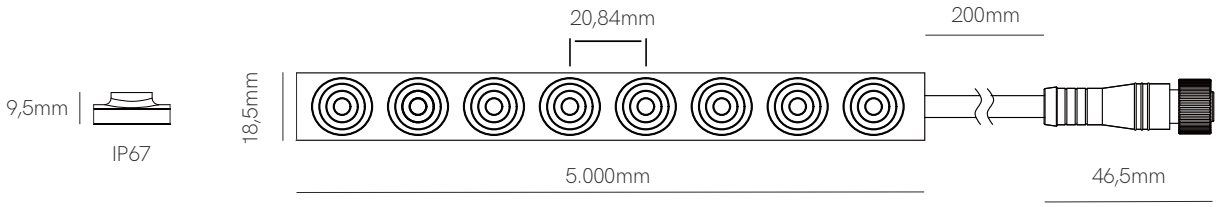





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W (3.000K / 4.000K) | 24V / 0,75A / 18W/m |
| V / A / W (RGB-W) | 24V / 0,33A / 8W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 96307 | 106 lm/w | 1.915 lm/m | 3000K | IP67 |
| | 96407 | 120 lm/w | 2.167 lm/m | 4000K | IP67 |
| | 96477 | 67,5 lm/w | 540 lm/m | RGB-W 3.000K | IP67 |

### Accessories



End Cap
☐ 96633



End Cap
☐ 96623



Clip
☐ 96119



Clip
☐ 96380



Clip
☐ 96330



Clip
☐ 96350



ADH
○ 96111



Extension cable
☐ 96946-M2
☐ 96946-M4
☐ 96946-H2
☐ 96946-H4



Extension cable
☐ 96920-2
☐ 96920-4

*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 18/8 W/m | 48 LED/m | CRI ≥90 | 24 VDC | monocolor 25mm rgb-w 160,5mm | 2835

## Fine 56



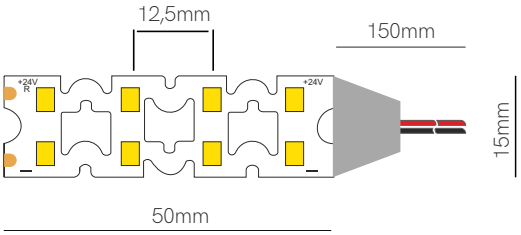





Compatible profiles.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,91A / 22W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 56270 | 155 lm/w | 3.410 lm/m | 2700K | IP20 |
| | 56300 | 160 lm/w | 3.520 lm/m | 3000K | IP20 |
| | 56400 | 170 lm/w | 3.740 lm/m | 4000K | IP20 |
| | 56360 | 130 lm/w | 2.860 lm/m | 2.700-6.000K | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

RoHS

5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 | 24 VDC | 50 mm | 2835

New

## Fine 30




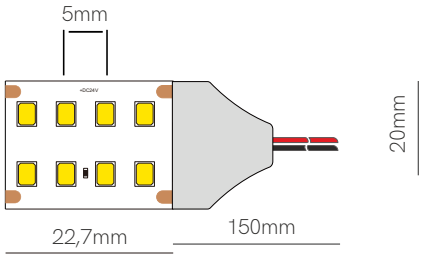





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 1,25A / 30W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 30270 | 150 lm/w | 4.500 lm/m | 2700K | IP20 |
| | 30300 | 155 lm/w | 4.650 lm/m | 3000K | IP20 |
| | 30400 | 160 lm/w | 4.800 lm/m | 4000K | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 30 W/m | 352 LED/m | CRI ≥90 | III | 24 VDC | 22,7mm | 2835



## Fine 51




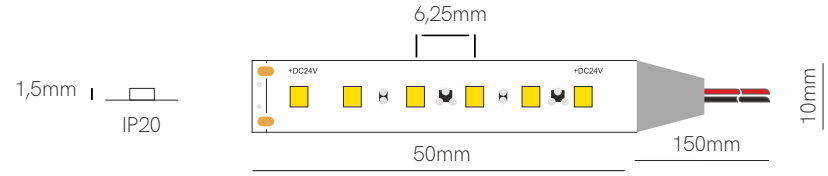


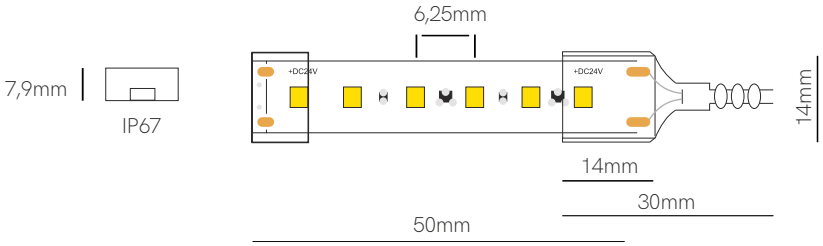


Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 51270 | 100 lm/w | 960 lm/m | 2700K | IP20 |
| | 51300 | 100 lm/w | 960 lm/m | 3000K | IP20 |
| | 51400 | 100 lm/w | 960 lm/m | 4000K | IP20 |
| | 51600 | 100 lm/w | 960 lm/m | 6000K | IP20 |
| | 51277 | 100 lm/w | 960 lm/m | 2700K | IP67 |
| | 51307 | 100 lm/w | 960 lm/m | 3000K | IP67 |
| | 51407 | 100 lm/w | 960 lm/m | 4000K | IP67 |
| | 51607 | 100 lm/w | 960 lm/m | 6000K | IP67 |

### Accessories



End Cap
32635



End Cap
32625

*Available in reel of 20 meters.

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | CRI ≥90 | 24 VDC | ULTRALONG | 50mm | 2835

New

## Fine 75



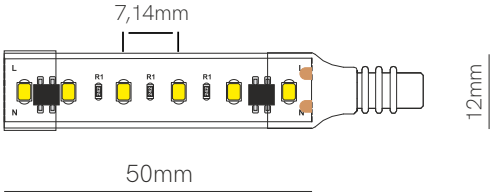





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 220V / 0,03A / 7W/m |

| Code | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| | 75275 | 100 lm/w | 700 lm/m | 2700K | IP65 |
| | 75305 | 105 lm/w | 735 lm/m | 3000K | IP65 |
| | 75405 | 110 lm/w | 770 lm/m | 4000K | IP65 |

### Accessories



End Cap ☐ 32635



End Cap ☐ 32625



Connector kit ☐ 32699



Join 180° ☐ 32899



Join 90° ☐ 32499



Clip ☐ 32900



Joint ☐ 32299

*Available in reel of 50 meters. Accessories pages 294-311.

CE RoHS | 3 YEARS WARRANTY | 7 W/m | 120 LED/m | CRI ≥80 | 220/240 VAC | 50mm | TRIAC DIMM | 2835

## Fine 32 N



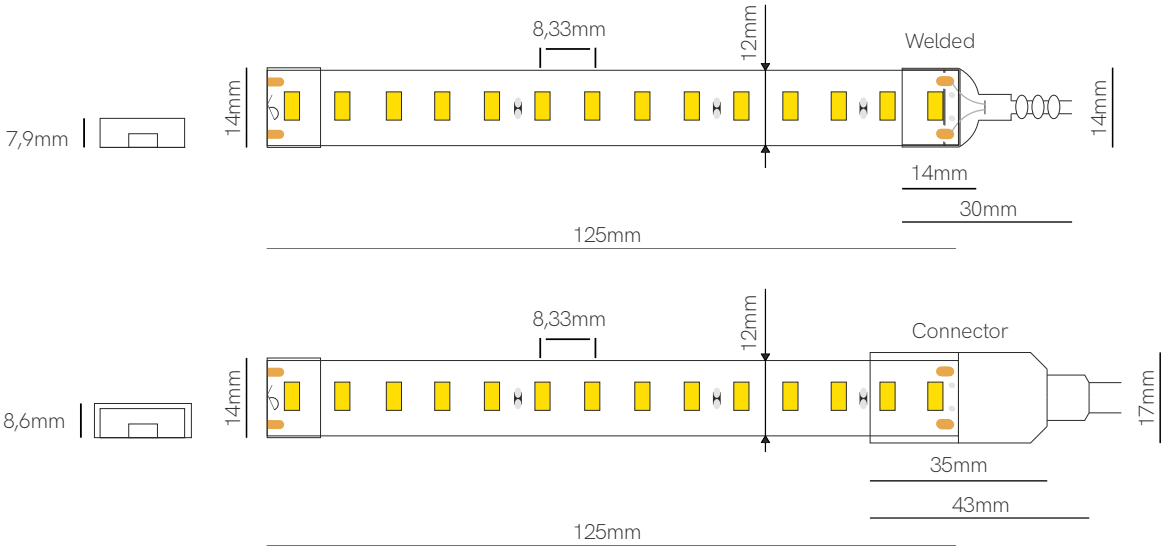


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 220V / 0,068A / 15W/m |

| Code | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| | 32275-N | 100 lm/w | 1.500 lm/m | 2700K | IP65 |
| | 32305-N | 105 lm/w | 1.575 lm/m | 3000K | IP65 |
| | 32405-N | 110 lm/w | 1.650 lm/m | 4000K | IP65 |
| | 32605-N | 110 lm/w | 1.650 lm/m | 6000K | IP65 |

## Accessories



End Cap ☐ 32635

End Cap ☐ 32625

Connector kit ☐ 32699

Join 180° ☐ 32899

Join 90° ☐ 32499

Clip ☐ 32900

Joint ☐ 32299

*Available in reel of 5 or 50 meters. Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 15 W/m | 112 LED/m | CRI ≥80 | 220/240 VAC | 125mm | TRIAC DIMM 30-100% | 2835

New

## Fine 88




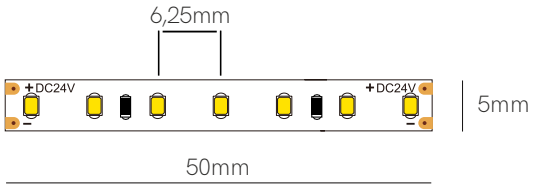





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 88220 | 90 lm/w | 1.080 lm/m | 2200K | IP20 |
| | 88270 | 100 lm/w | 1.200 lm/m | 2700K | IP20 |
| | 88300 | 105 lm/w | 1.260 lm/m | 3000K | IP20 |
| | 88400 | 110 lm/w | 1.320 lm/m | 4000K | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | 24 VDC | 50mm | 2835

## Fine 49




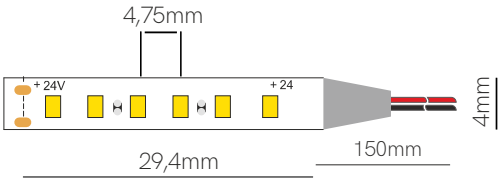





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 49270 | 71 lm/w | 710 lm/m | 2700K | IP20 |
| | 49300 | 74 lm/w | 740 lm/m | 3000K | IP20 |
| | 49400 | 77 lm/w | 770 lm/m | 4000K | IP20 |
| | 49600 | 74 lm/w | 740 lm/m | 6000K | IP20 |

## Accessories



Joint
20049



Joint
20249

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 204 LED/m | CRI ≥90 | III | 24 VDC | 29,4mm | 2216

## Fine 55



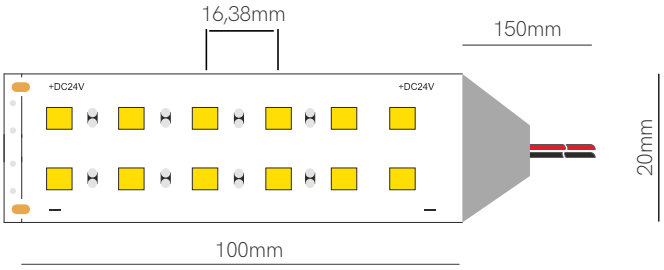





Compatible profiles.

### Technical Information

| V / A / W | 24V / 1A / 24W/m |
|---|---|

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 55270 | 80 lm/w | 1.920 lm/m | 2700K | IP20 |
| | 55300 | 83 lm/w | 1.992 lm/m | 3000K | IP20 |
| | 55400 | 86 lm/w | 2.064 lm/m | 4000K | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 24 W/m | 120 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 5050

New

## Fine 37




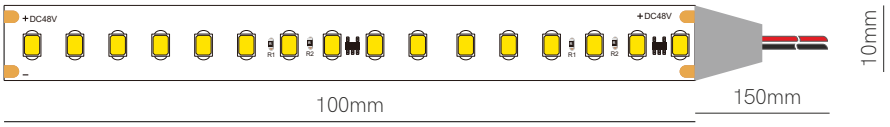





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 48V / 0,3A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 37270 | 126 lm/w | 1.815 lm/m | 2700K | IP20 |
| | 37300 | 135 lm/w | 1.944 lm/m | 3000K | IP20 |
| | 37400 | 140 lm/w | 2.016 lm/m | 4000K | IP20 |

Power supply 48V (page 366).

## Accessories



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 25 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 160 LED/m | CRI ≥90 | III | 48 VDC | 100mm | 2835



## Fine 44




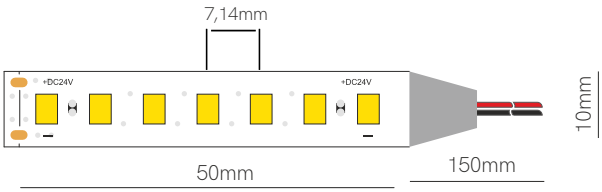






MEAT STRIP


FISH STRIP


FRUIT STRIP


BREAD STRIP

Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 44370 | 85lm/w | 1.224 lm/m | MEAT (3.700K) | IP20 |
| | 44110 | 95 lm/w | 1.368 lm/m | FISH (11.600K) | IP20 |
| | 44500 | 90 lm/w | 1.296 lm/m | FRUIT (5.000K) | IP20 |
| | 44270 | 80 lm/w | 1.152 lm/m | BREAD (2.700K) | IP20 |

## Accessories


Joint
13,8x11,55x3,9mm
☐ 20220


Joint
13,55x11,67x4,7mm
☐ 20120


Joint
15,4x11,5x5,7mm
☐ 20991


Joint
21,6x11,5x5,7mm
☐ 20999

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | CRI 75/97 | 24 VDC | 50mm | 2835



## Fine 63




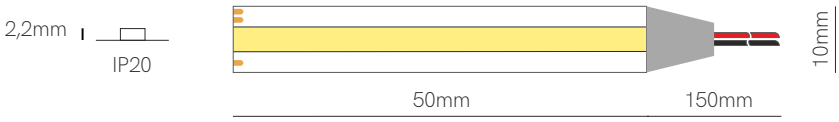


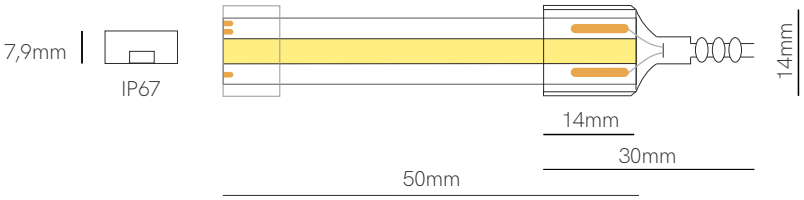


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,79A / 19W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 63360 | 89-95 lm/w | 850-1.750 lm/m | 2.700-6.000K | IP20 |
| | 63367 | 89-95 lm/w | 850-1.750 lm/m | 2.700-6.000K | IP67 |

## Accessories



End Cap
32635



End Cap
32625

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 19 W/m | 640 LED/m | CRI ≥90 | III | 24 VDC | 50mm | COB

## Fine 36




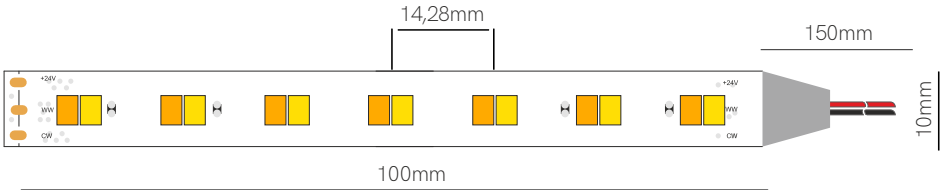





Compatible profiles.

## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 36360 | 100 lm/w | 1.200 lm/m | 2.700-5.000K | IP20 |

## Accessories



Joint
13,57x11,63x3,5mm
☐ 20230



Joint
13,57x11,63x4,7mm
☐ 20130

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 2835

## Fine 42




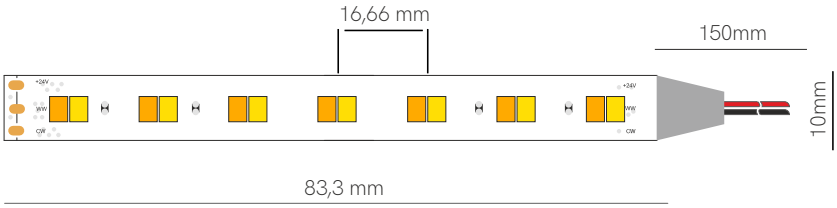





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,8A / 19,2W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 42360 | 90 lm/w | 1.728 lm/m | 1.800-4.000K | IP20 |
| | 42365 | 90 lm/w | 1.728 lm/m | 1.800-4.000K | IP65 |

## Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,57x11,63x3,5mm
□ 20230



Joint
13,57x11,63x4,7mm
□ 20130



Joint
24,3x14,6x7,7mm
□ 20235



Joint
24,3x14,6x7,7mm
□ 20135

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 19,2 W/m | 168 LED/m | CRI ≥90 | 24 VDC | 83,3mm | 2835


▶ VIDEO

## Fine 54

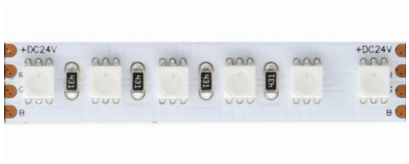

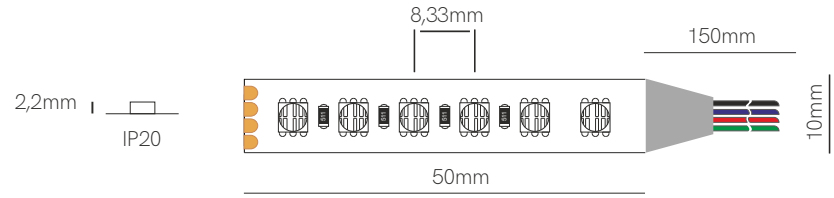


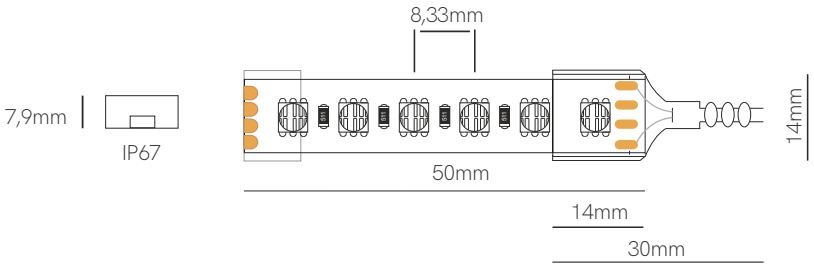


Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 54460 | 50 lm/w | 700 lm/m | RGB | IP20 |
| 54467 | 45 lm/w | 630 lm/m | RGB | IP67 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | III | 50mm | 4040



## Fine 46




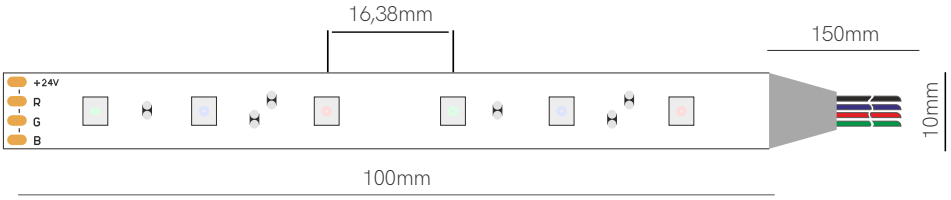





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 46460 | 38 lm/w | 547 lm/m | RGB | IP20 |
| 46465 | 41 lm/w | 590 lm/m | RGB | IP65 |

## Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,54x11,7x4,1mm
□ 20240



Joint
13,56x13,46x4,7mm
□ 20140



Joint
24,3x14,6x7,68mm
□ 20245



Joint
24,3x14,6x7,68mm
□ 20145

*Available in reel of 5 or 25 meters. Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | III | 50mm | 5050

## Fine 43



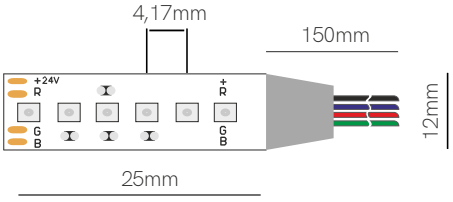





Compatible profiles.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,8A / 19,2W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 43430 | 90 lm/w | 1.728 lm/m | RGB | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 19,2 W/m | 240 LED/m | 24 VDC | 25mm | 3535

## Fine 50



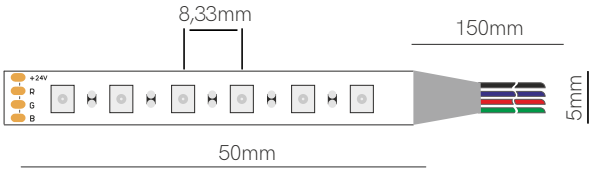





Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,4A / 9,6W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 50460 | 58 lm/w | 556 lm/m | RGB | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC | 50mm | 2835



New

## Fine 60



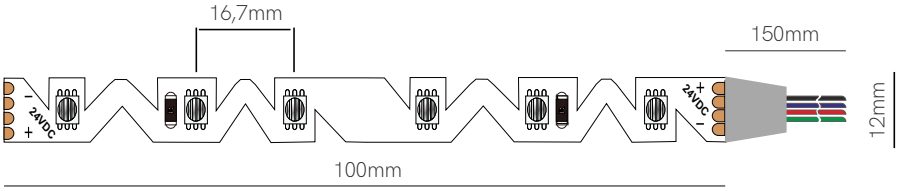





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,33A / 8W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 60460 | 81 lm/w | 648 lm/m | RGB | IP20 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 8 W/m | 60 LED/m | 24 VDC | 100mm | 5050

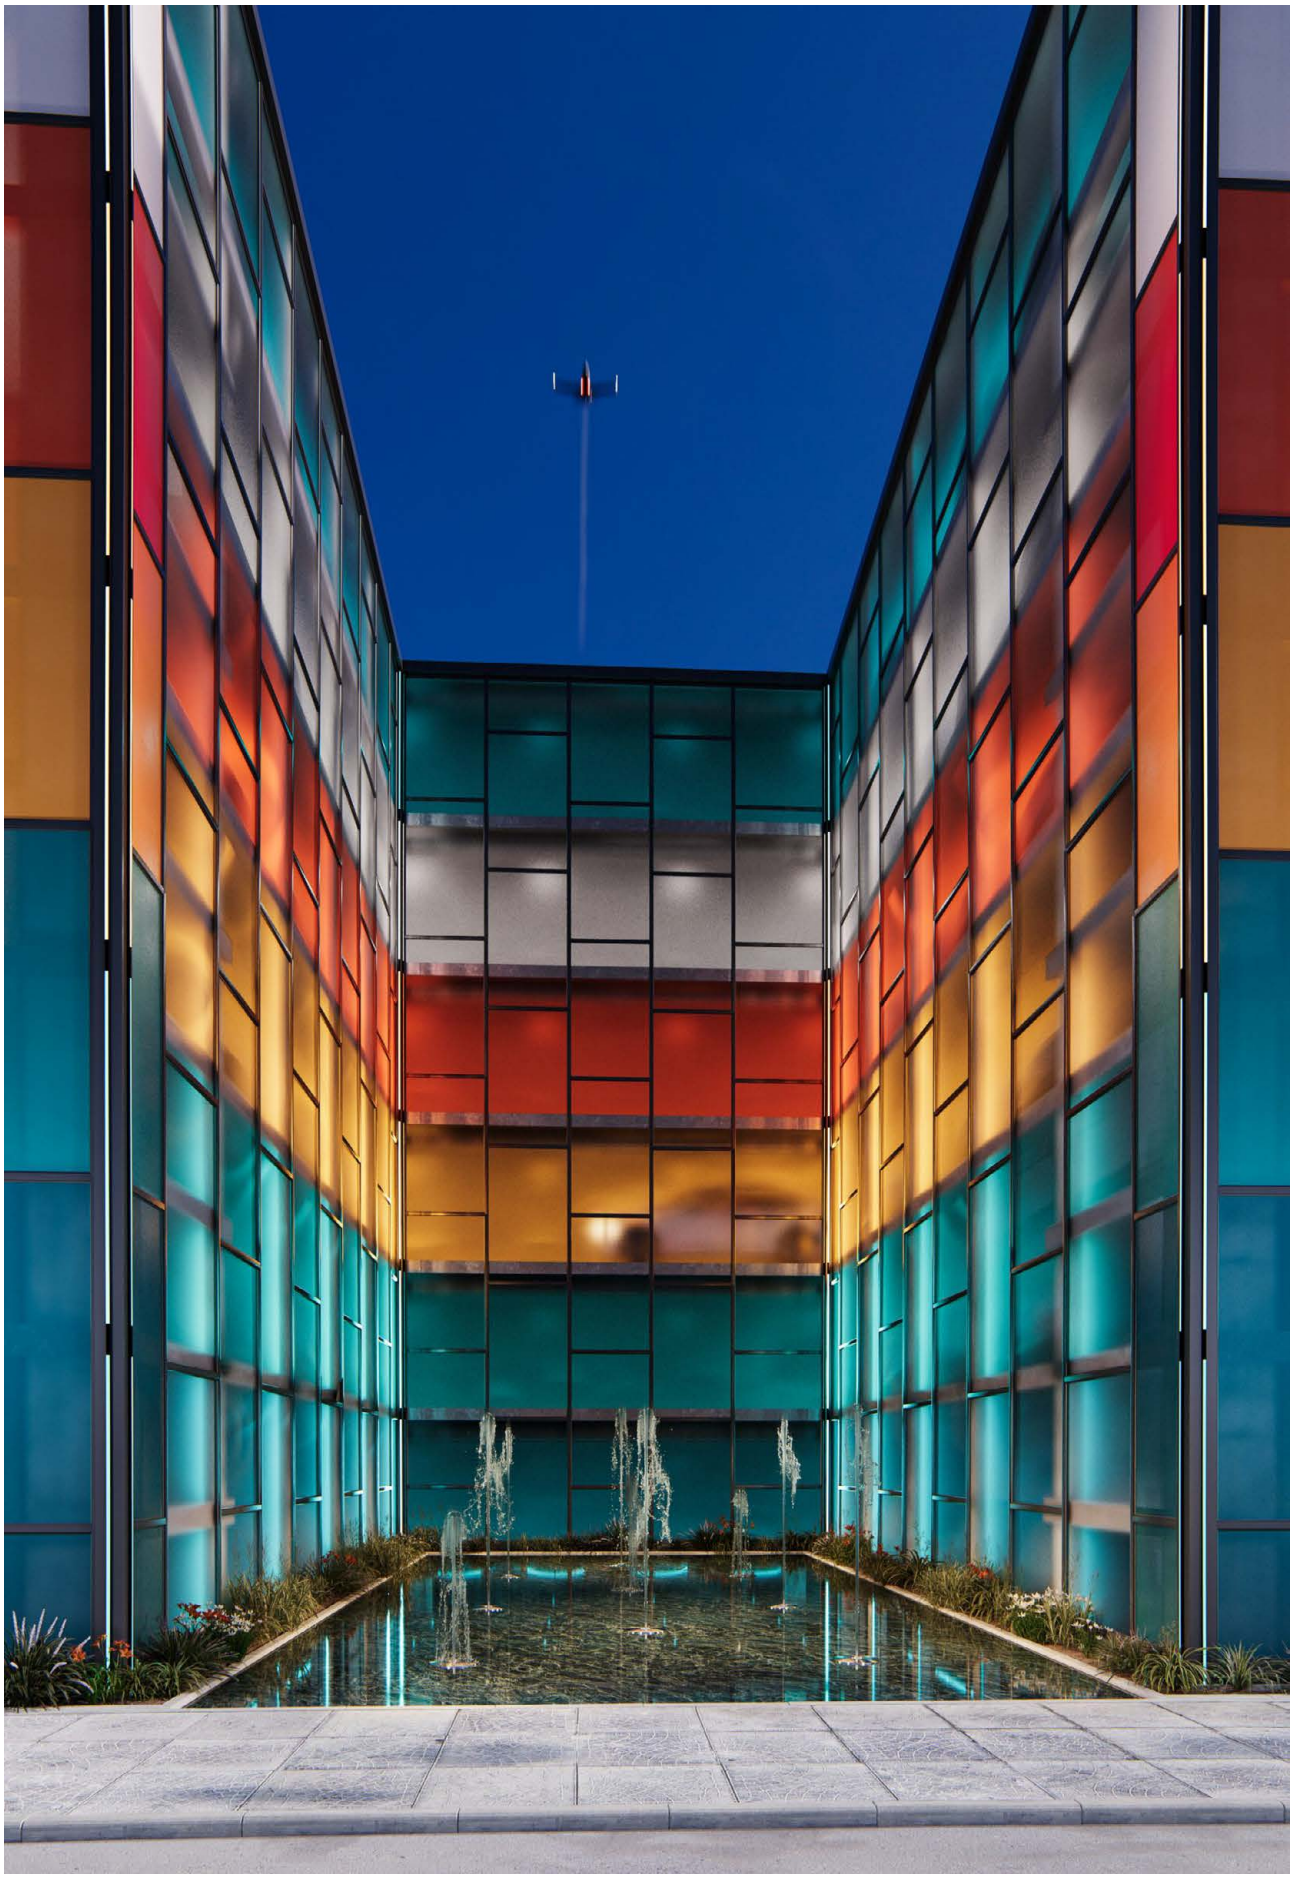

New

## Fine 66 N




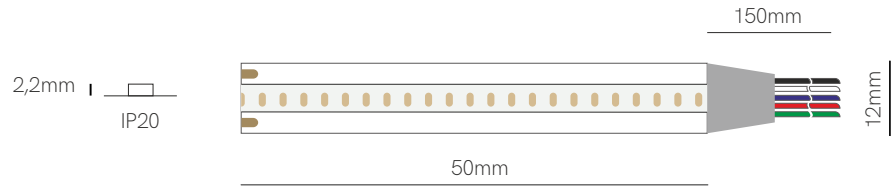


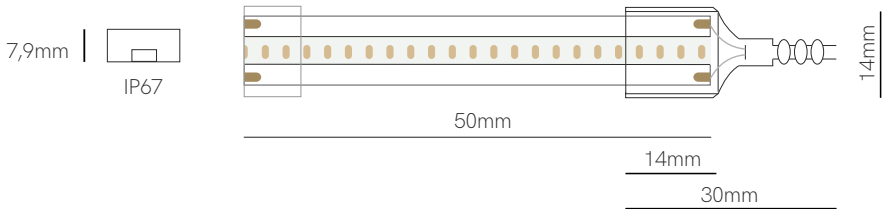


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 1A / 24W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 66470/N | 167 lm/w | 996 lm/m | RGB-W 2.700K | IP20 |
| | 66477/N | 167 lm/w | 996 lm/m | RGB-W 2.700K | IP67 |

## Accessories



Joint
☐ 20066



Joint
☐ 20266

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 24 W/m | 560 LED/m | 24 VDC | 50mm | CSP

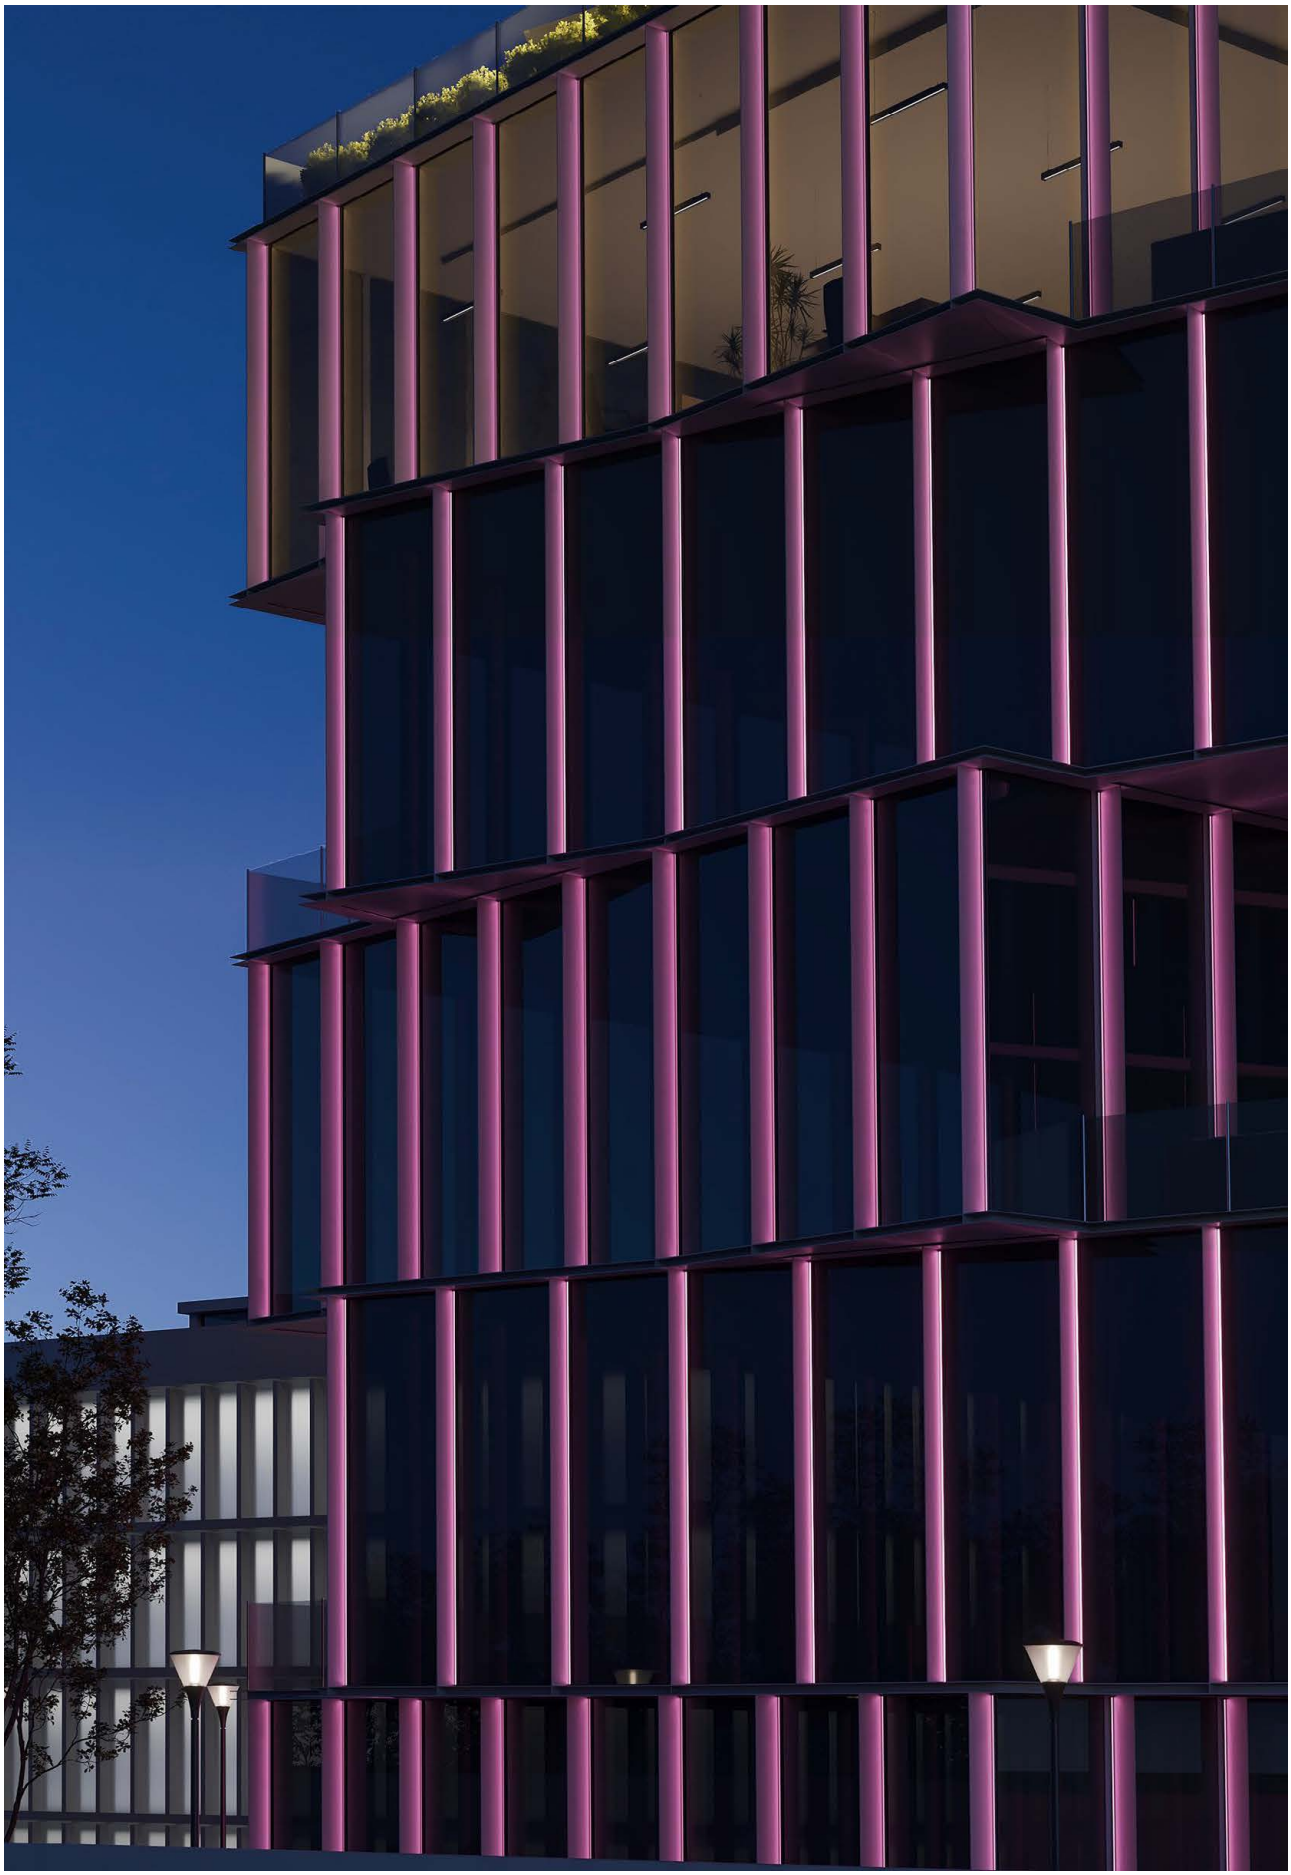

## Fine 71



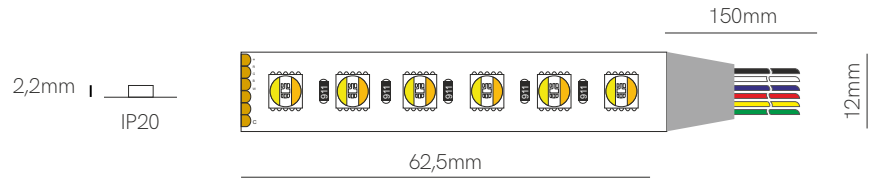


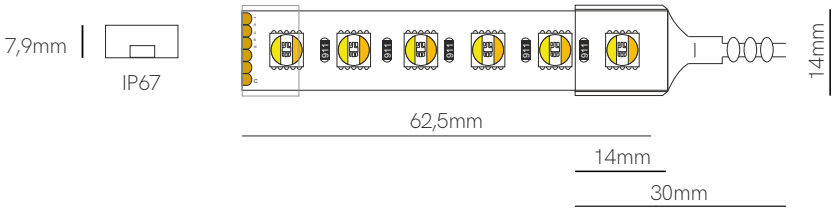


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,875A / 21W/m |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 71470 | 29-117 lm/w | 70-1.555 lm/m | RGB-WW 2.700K 6000K | IP20 |
| | 71477 | 29-117 lm/w | 70-1.555 lm/m | RGB-WW 2.700K 6000K | IP67 |

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | 62,5mm | 5050

## Fine 47



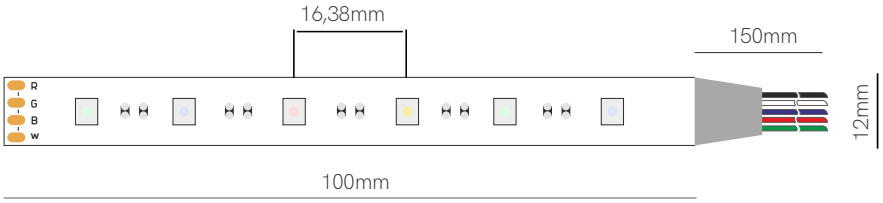





Compatible profiles.

### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,6A / 14,4W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | 47430 | 18-60 lm/w | 260-864 lm/m | RGB-W 3.000K | IP20 |
| | 47440 | 18-60 lm/w | 260-864 lm/m | RGB-W 4.000K | IP20 |
| | 47437 New | 18-60 lm/w | 260-864 lm/m | RGB-W 3.000K | IP67 |
| | 47447 New | 18-60 lm/w | 260-864 lm/m | RGB-W 4.000K | IP67 |

### Accessories



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

*Available in reel of 5 or 25 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 100mm | 5050

## Fine 45




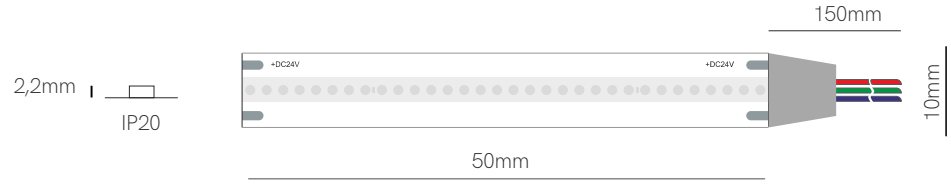


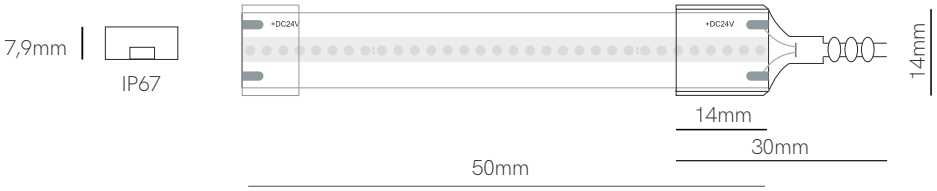


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 45220 | 15 | 150 | RED | IP20 |
| | 45310 | 91 | 910 | GREEN | IP20 |
| | 45520 | 13 | 130 | BLUE | IP20 |
| | 45227 | 15 | 150 | RED | IP67 |
| | 45317 | 91 | 910 | GREEN | IP67 |
| | 45527 | 13 | 130 | BLUE | IP67 |

## Accessories



End Cap ☐ 32635 | End Cap ☐ 32625 | Clip ☐ 31709 | Clip ☐ 31809 | Joint ☐ 31909

*Available in reel of 10 meters.

Accessories pages 294-311.

CE RoHS

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | 50 mm | CSP

# Running led strip

▶ VIDEO

Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip.
Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.
We do have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by Beneito & Faure, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

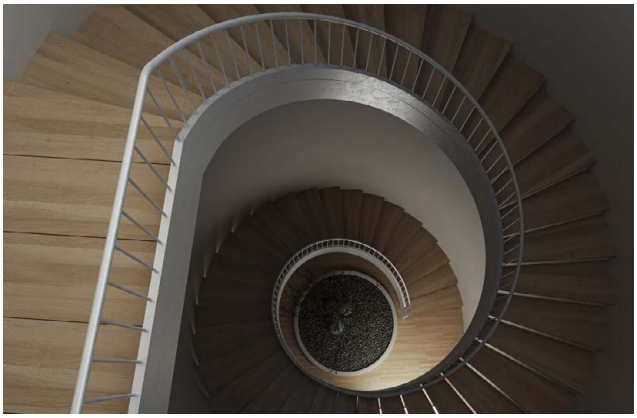



Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio.
Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por Beneito & Faure, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.





## Fine running

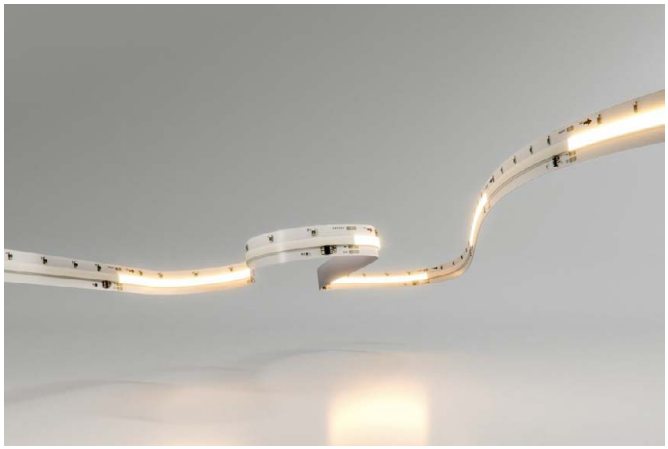

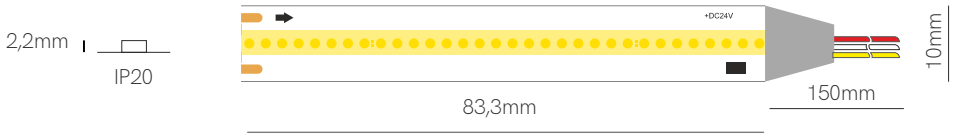


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |
| IC | WS2811 (12px/m) |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | SP1300 | 79 lm/w | 950 lm/m | 3000K | IP20 |
| | SP1400 | 87 lm/w | 1.050 lm/m | 4000K | IP20 |

*Available in reel of 5 meters. Accessories pages 294-311.

## Control

| | Code | Version | Power Max | Pixels Max | VDC IN |
|---|---|---|---|---|---|
|  | SP-9812 | Controller | - | - | 24 VDC |
|  | SP-6329 | Running Touch Controller | 8A | 1.024 | 24 VDC |

CE RoHS

3 YEARS WARRANTY | 12 W/m | 360 LED/m | CRI ≥90 | III | 24 VDC | 83,3mm | SPI | COB

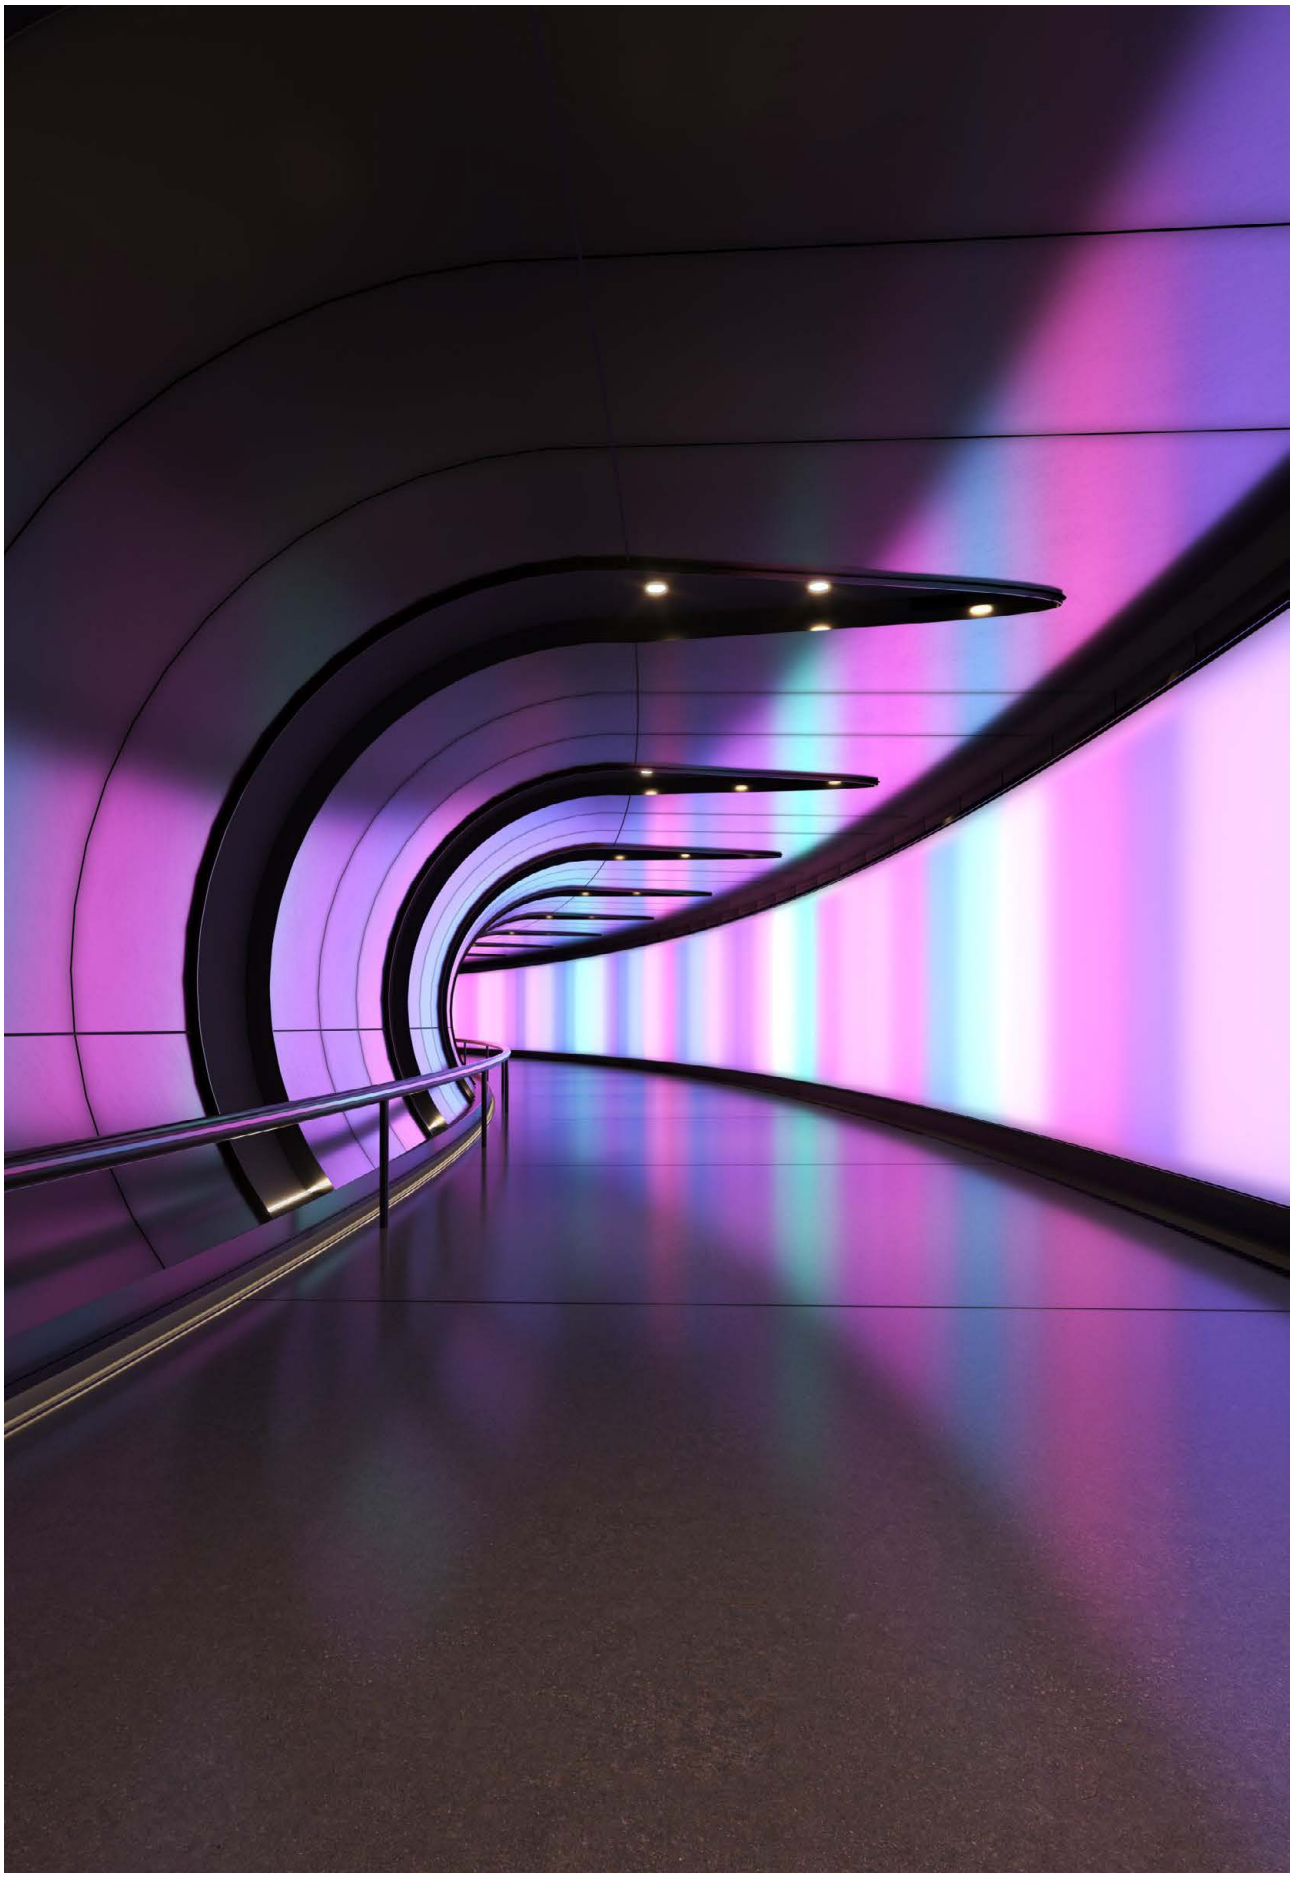

## Fine SPI-2

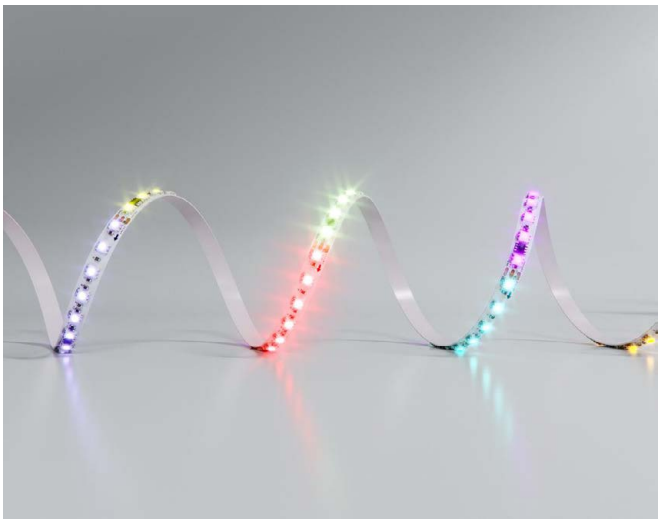

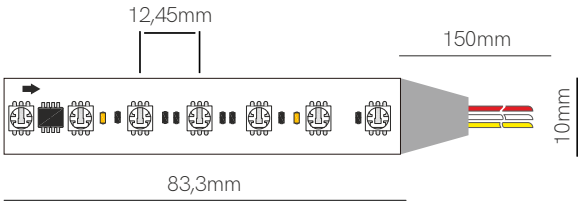





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,58A / 14W/m |
| IC | SM16703PB (12px/m) |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | SP2430 | 37 lm/w | 515 lm/m | RGB | IP20 |
| | SP2435 New | 37 lm/w | 515 lm/m | RGB | IP65 |

*Available in reel of 5 meters.
Accessories pages 294-311.

CE RoHS | 3 YEARS WARRANTY | 14 W/m | 84 LED/m | III | 24 VDC | 83,3mm | SPI | 5050


aramco
aramco
aramco
aramco
aramco

## Fine SPI-3



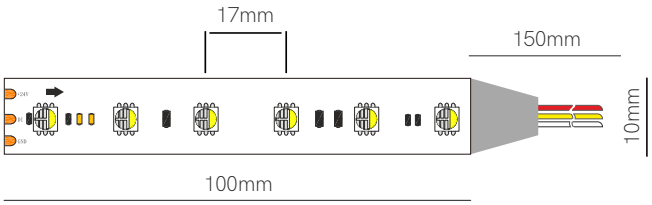





Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,45A / 11W/m |
| IC | SK6812 12MA (10px/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | SP3470 | 51 lm/w | 561 lm/m | RGB-W 3.000K | IP20 |
| | SP3475 New | 51 lm/w | 561 lm/m | RGB-W 3.000K | IP65 |

*Available in reel of 5 meters.
Accessories pages 294-311.

CE RoHS | 3 YEARS WARRANTY | 11 W/m | 60 LED/m | III | 24 VDC | 100mm | SPI | 5050




VIDEO

## Fine SPI-4

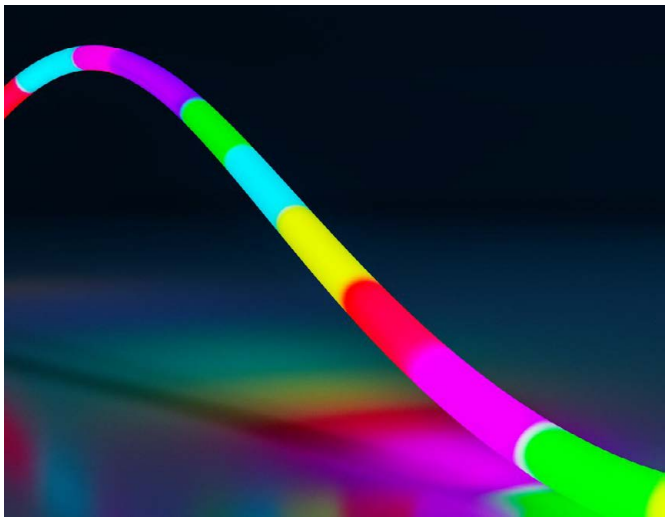

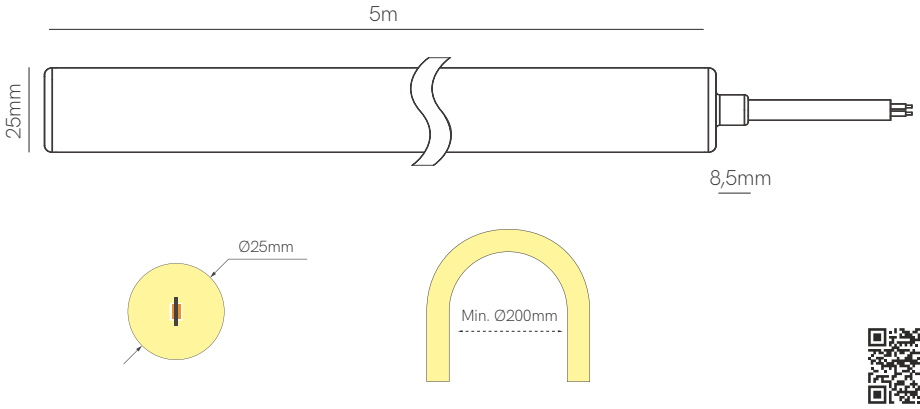


## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,83A / 20W/m |
| IC | SK6812 12MA (12px/m) |

| | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| Code | SP4437 | 12,5 lm/w | 250 lm/m | RGB | IP67 |

## Accessories



End Cap
○ 25627



End Cap
○ 25657-1
● 25657-2
○ 25657



Initial roof Cap
○ 25997-1
● 25997-2
○ 25997



Clip
○ 25530



Initial Cap
○ 25667-1
● 25667-2
○ 25667



Initial Cap
○ 25637



Tube
○ 25450



Joint with base
○ 25227-1
● 25227-2
○ 25227



Suspension kit
○ 25887

*Available in reel of 5 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 168 LED/m | 24 VDC | 83,3mm | SPI | 5050


▶ VIDEO

## Fine DMX-4

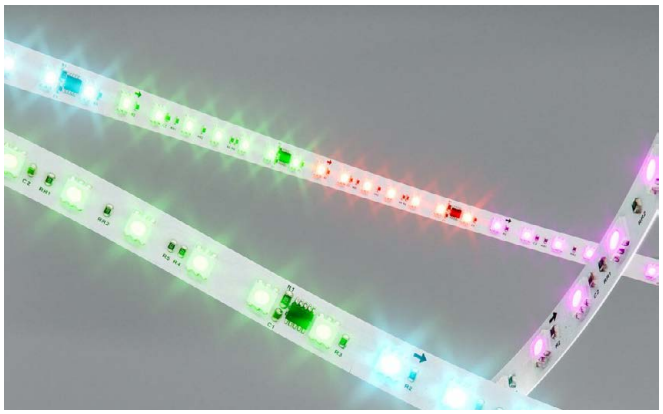

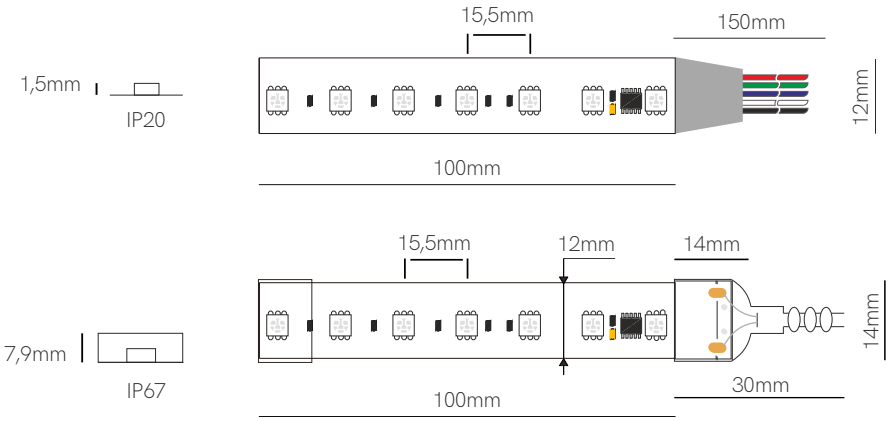


Compatible profiles.



### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,5A / 12W/m |
| IC | SM18512PS (10px/m) |

| | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| Code | DM4430 | 42 lm/w | 503 lm/m | RGB | IP20 |
| | DM4437 | 42 lm/w | 503 lm/m | RGB | IP67 |

### Accessories



End Cap
32635



End Cap
32625

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 12 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050


▶ VIDEO

## Fine DMX-5



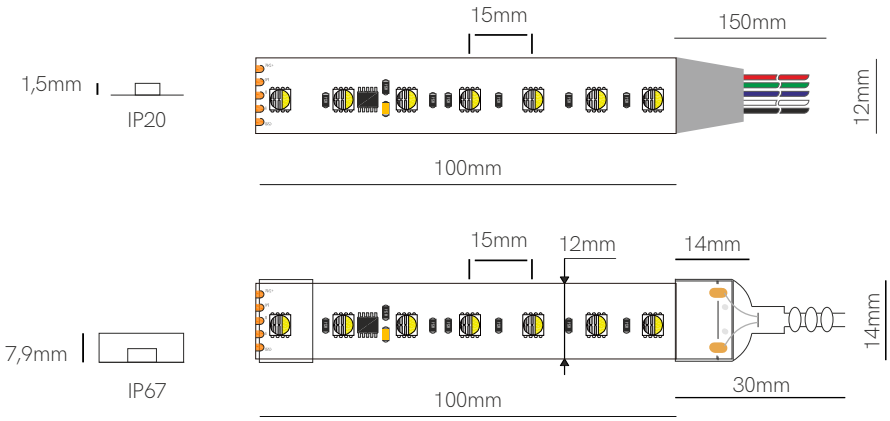


Compatible profiles.



## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,7A / 17W/m |
| IC | SM18512PS (10px/m) |

| | Code | Lumen/w | Lumen/m | CCT | IP |
|---|---|---|---|---|---|
| Code | DM5470 | 50 lm/w | 861 lm/m | RGB-W 3.000K | IP20 |
| | DM5477 | 50 lm/w | 861 lm/m | RGB-W 3.000K | IP67 |

## Accessories



End Cap
32635



End Cap
32625

*Available in reel of 5 meters.

Accessories pages 294-311.

CE RoHS

3 YEARS WARRANTY | 17 W/m | 70 LED/m | 24 VDC | 100mm | DMX | 5050

# NEON IP67 LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.



Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.

Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.





FITSEVENELEVEN®, Club Frankfurt Airport.

## Fine 25



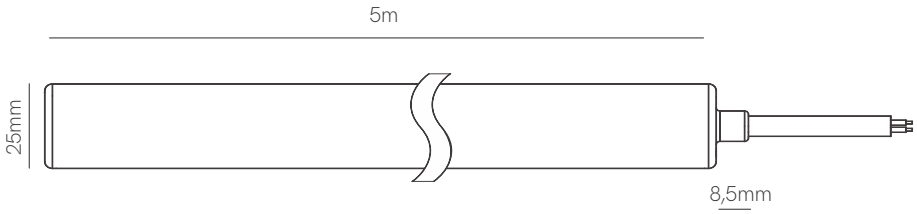








## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,83A / 20W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 25247 | 60 lm/w | 1.200 lm/m | 2400K | IP67 |
| | 25277 | 65 lm/w | 1.300 lm/m | 2700K | IP67 |
| | 25307 | 69 lm/w | 1.380 lm/m | 3000K | IP67 |
| | 25407 | 73 lm/w | 1.460 lm/m | 4000K | IP67 |
| | 25367 | 55 lm/w | 1.100 lm/m | 2700K-4200K | IP67 |
| | 25467 | 41 lm/w | 820 lm/m | RGB | IP67 |

*Available in reels of 1,5 m, 3 m and 5 meters.

## Accessories



End Cap
○ 25627



End Cap
○ 25657-1
● 25657-2
○ 25657



Initial roof Cap
○ 25997-1
● 25997-2
○ 25997



Clip
○ 25530



Initial Cap
○ 25667-1
● 25667-2
○ 25667



Initial Cap
○ 25637



Tube
○ 25450



Joint with base
○ 25227-1
● 25227-2
○ 25227



Suspension kit
○ 25887

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 20 W/m | 320 LED/m | 480 LED/m (CCT) | 240 LED/m (RGB) | 24 VDC | 10mm / 50mm (CCT-RGB) | 2835 | 4040 (RGB) | CRI ≥90



New

## Fine 34












## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,21A / 5W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 34277 | 28 lm/w | 140 lm/m | 2700K | IP67 |
| | 34307 | 30 lm/w | 150 lm/m | 3000K | IP67 |
| | 34407 | 32 lm/w | 160 lm/m | 4000K | IP67 |

## Accessories


End Cap
☐ 34627


End Cap
☐ 34967


End Cap
☐ 34637


Clip
25x5,8x5mm
☐ 34330


Clip
1000x5,8x5mm
☐ 34119

*Available in reel of 10 meters.

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 5 W/m | 196 LED/m | 24 VDC | 35,7mm | 2216 | CRI ≥90



New

## Fine 77



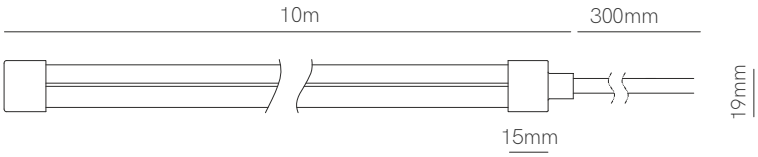







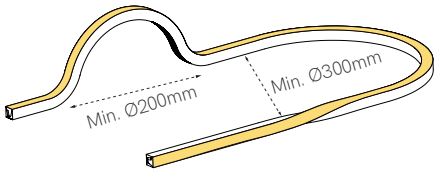


### Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,33A / 12W/m / 8W/m |

| Code | Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|---|
| | 77277 | 50 lm/w | 600 lm/m | 2700K | IP67 |
| | 77307 | 51 lm/w | 612 lm/m | 3000K | IP67 |
| | 77407 | 55 lm/w | 660 lm/m | 4000K | IP67 |
| | 77437 | 26 lm/w | 208 lm/m | RGB | IP67 |

### Accessories



End Cap ☐ 77627
End Cap ☐ 77967
End Cap ☐ 77997
End Cap ☐ 77637
Clip 30x18x18mm ☐ 77580
Clip 1000x18x18mm ☐ 77819
Clip 1000x18x18mm ☐ 77953

*Available in reel of 10 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 12 W/m | 8 W/m (RGB) | 120 LED/m | 24 VDC | 50mm | 2835 | 4040 (RGB) | CRI ≥90



## Fine 70



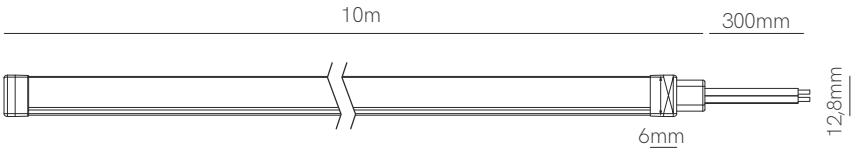








## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,20A / 5W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 70277 | 31 lm/w | 155 lm/m | 2700K | IP67 |
| 70307 | 35 lm/w | 175 lm/m | 3000K | IP67 |
| 70407 | 37 lm/w | 185 lm/m | 4000K | IP67 |
| 70437 | 15 lm/w | 75 lm/m | RGB | IP67 |

## Accessories



End Cap
☐ 70627



End Cap
☐ 70967



End Cap
☐ 70637



Clip
19,7x8x13mm
☐ 70330



Clip
1000x8x13mm
☐ 70119



Clip
1000x7,5x12,5mm
☐ 70350

*Available in reel of 10 meters.

Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 5 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | III | 50mm | 2835 | 4040 (RGB) | CRI ≥90



## Fine 72



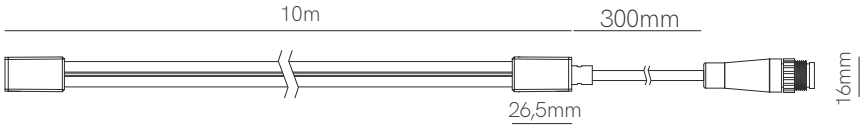








## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 72277 | 59 lm/w | 590 lm/m | 2700K | IP67 |
| 72307 | 62 lm/w | 620 lm/m | 3000K | IP67 |
| 72407 | 65 lm/w | 650 lm/m | 4000K | IP67 |
| 72437 | 26 lm/w | 260 lm/m | RGB | IP67 |

## Accessories



End Cap
- ☐ 72967-L2
- ☐ 72967-L4



End Cap
- ☐ 72967-2
- ☐ 72967-4



End Cap
- ☐ 72627-2
- ☐ 72627-4



End Cap
- ☐ 72637



Clip 20,2x14x14mm
- ☐ 77530



Clip 1000x14x14mm
- ☐ 77519



Clip 1000x14x18mm
- ☐ 77350



Extension cable
- ● 77946 (Mono)
- ● 77920 (RGB)

*Available in reel of 10 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | 50mm / 62,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90



## Fine 74



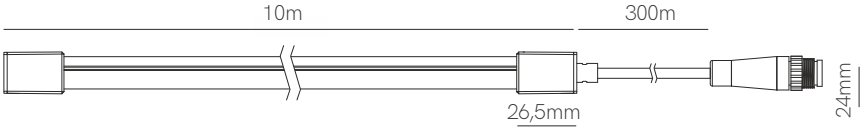








## Technical Information

| | |
|---|---|
| V / A / W | 24V / 0,41A / 10W/m |

| Code | Lumens/w | Lumens/m | CCT | IP |
|---|---|---|---|---|
| 74277 | 59 lm/w | 590 lm/m | 2700K | IP67 |
| 74307 | 62 lm/w | 620 lm/m | 3000K | IP67 |
| 74407 | 65 lm/w | 650 lm/m | 4000K | IP67 |
| 74437 | 22 lm/w | 220 lm/m | RGB | IP67 |

## Accessories



End Cap
- ☐ 74967-L2
- ☐ 74967-L4



End Cap
- ☐ 74967-2
- ☐ 74967-4



End Cap
- ☐ 74627-2
- ☐ 74627-4



End Cap
- ☐ 74637



Clip 20x12,7x18,7mm
- ☐ 77330



Clip 1000x14,5x21,5mm
- ☐ 77119



Clip 1000x13,5x18mm
- ☐ 77350



Extension cable
- ● 77946 (Mono)
- ● 77920 (RGB)

*Available in reel of 10 meters. Accessories pages 294-311.

CE RoHS | 5 YEARS WARRANTY | 10 W/m | 140 LED/m | 96 LED/m (RGB) | 24 VDC | III | 50mm / 55,5mm (RGB) | 2835 | 4040 (RGB) | CRI ≥90


▶ VIDEO

New

## Dynamic control

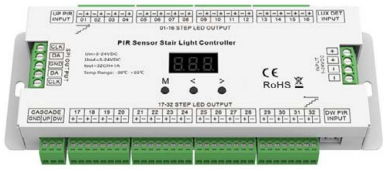





Stair light controller with dual PIR sensor + double push button (up & down), and daytime detection function. Controls a maximum of 32 steps.

## PIR stair light controller (single color led strip)

| Code | | VDC IN | VDC OUT | Output current | Output power | Sensitive field | Sensitive angle |
|---|---|---|---|---|---|---|---|
| 85732 | ☐ | 5-24VDC | 32 x (5-24)VDC | 32CH,1A/CH | 32 x (5-24)W | ⩽3m | 30° (±10°) |






Stair light controller / SPI led scenes + double push button (up & down). Controls speed and brightness. Suitable for multiple ICs.

## SPI light controller (RGB or white light led pixel strip)

| Code | | VDC IN | Input current | Output signal | Pixel number |
|---|---|---|---|---|---|
| 85769 | ☐ | 5-24VDC | 15A | 2 X SPI(TTL) | Max 960 |






Stair light controller / SPI led scenes with dual PIR sensor + double push button (up&down), and daylight detection function. Suitable for multiple ICs.

## SPI light controller stairs / scenes (RGB or white light led pixel strip)

| Code | | VDC IN | Input current | Output signal | Pixel number | Sensitive field | Sensitive angle |
|---|---|---|---|---|---|---|---|
| 85753 | ☐ | 5-24VDC | 15A | 2 X SPI(TTL) | Max 960 | ⩽3m | 30° (±10°) |

CE RoHS

5 YEARS WARRANTY | IP 20

Smart home solution

On - Off

0% 100%
Dimmable

2.700K 5.000K
CCT

Light color

Group

50%
3.500K
Scenes

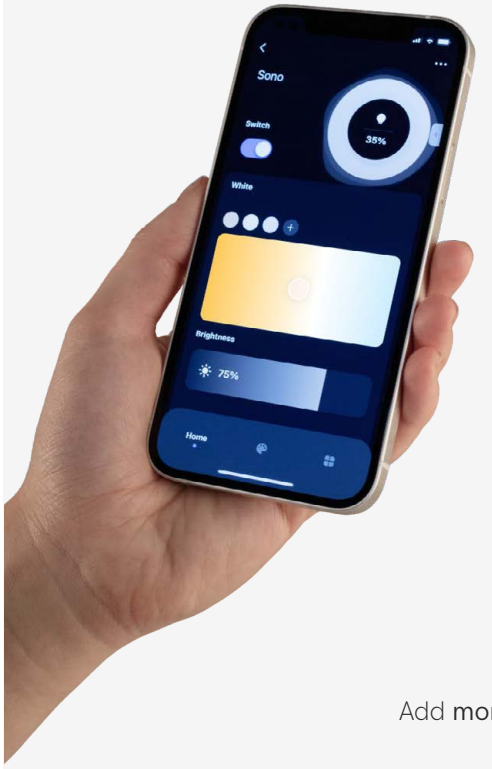


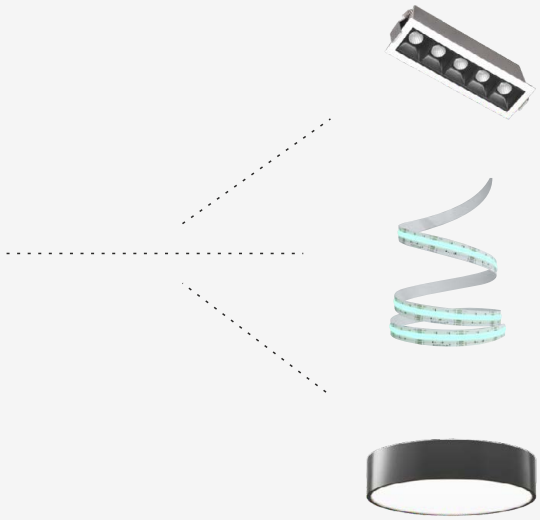

Add **more additional features** with Tuya Smart **Gateway**.

Schedule day and time

Control from anywhere via internet

WORKS WITH alexa
Voice control with Alexa

works with Hey Google
Voice control with Google Home



Home Router

Tuya Gateway



All products with Tuya logo can have these functions.

# CASAMBI

Professional solution

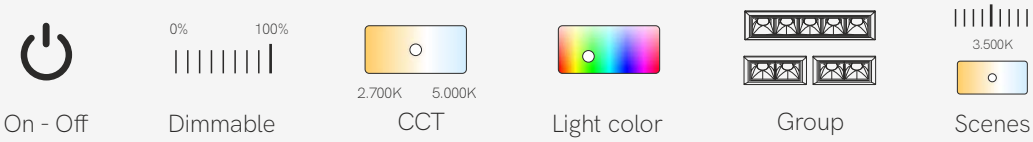


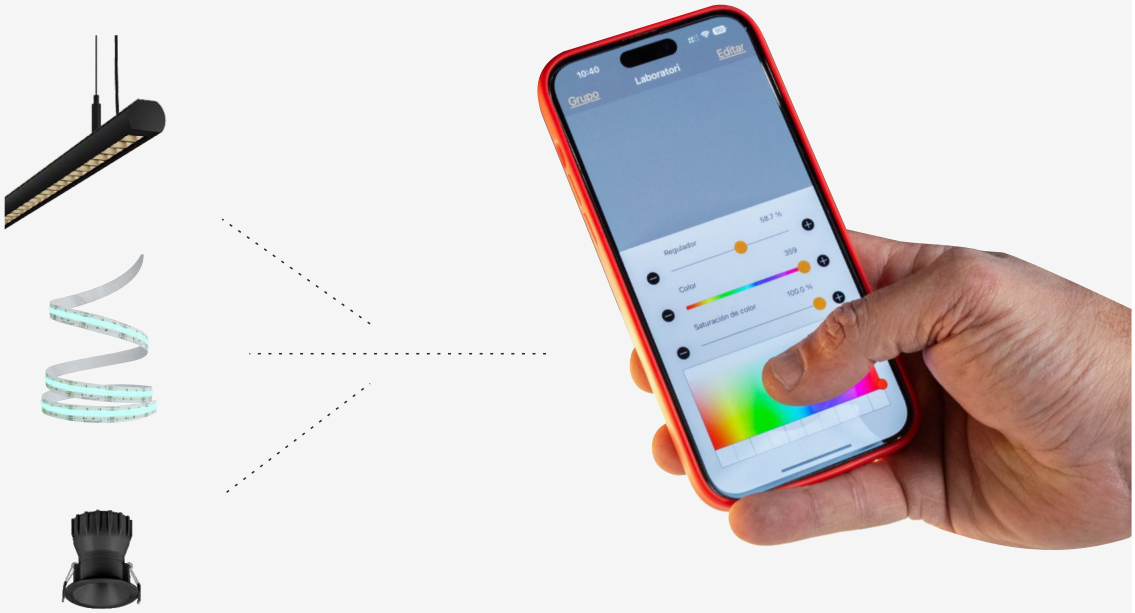


Add **more additional features** with Casambi Smart **Gateway**.







All products with Casambi logo can have these functions.

1. 
2. 
3. 
4. 
5. 

6. 
7. 
8. 
9. 

New
10. 
New
11. 
New
12. 
New
13. 

## RF Control for Tuya

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | | RF Dimming | - | 3VDC (CR2032) | 139x36x11mm |
| 2. | 85360 | ■ | | RF CCT | - | 3VDC (CD2032) | 139x36x11mm |
| 3. | 85460 | ■ | | RF RGB | - | 3VDC (CR2032) | 139x36x11mm |
| 4. | 85470 | ■ | | RF RGB-W | - | 3VDC (CR2032) | 139x36x11mm |
| 5. | 85990 | ■ | | RF RGB+CCT | - | 3VDC (CR2032) | 139x36x11mm |
| 6. | 85894 | ■ | | RF Dimming 4 Zones | - | 3VDC (CR2032) | 138x50x22mm |
| 7. | 85364 | ■ | | RF CCT 4 Zones | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 8. | 85475 | ■ | | RF RGB-W 4 Zones | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 9. | 85995 | ■ | | RF RGB+CCT 4 Zones | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 10. | 85144 | ■ | New | RF Dimming 4 Zone 2 Scenes | - | 3VDC (CR2032) | 86x86x9,5mm |
| 11. | 85244 | ■ | New | RF CCT 4 Zones 2 Scenes | - | 3VDC (CR2032) | 86x86x9,5mm |
| 12. | 85444 | ■ | New | RF RGB/RGBW 4 Zones | - | 3VDC (CR2032) | 86x86x9,5mm |
| 13. | 85544 | ■ | New | RF RGB+CCT 4 Zones | - | 3VDC (CR2032) | 86x86x9,5mm |

tuya | RF

1. 
2. 
3. 

## Control Tuya

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22856 | ☐ | Controller Tuya 5C | 5Cx3A | 12-24 VDC | 114x38x20mm |
| 2. | 22821 | ☐ | Controller Push/Tuya 2C | 2Cx5A | 12-36W | 114x38x20mm |
| 3. | 22570 | ☐ | Controller Push/Tuya/RF 5C | 5Cx6A | 12-48W | 179x56x30mm |

tuya

1. New 
2. New 
3. New 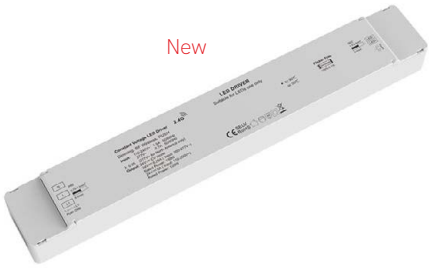

## Power Supplies Push/RF

| | Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|---|
| 1. | 82440 | ☐ | New | 40W | IP20 | 100-240 VAC | 24 VDC | 168x44x30mm |
| 2. | 82475 | ☐ | New | 75W | IP20 | 200/240 VAC | 24 VDC | 179x56x30mm |
| 3. | 82415 | ☐ | New | 150W | IP20 | 110-277 VAC | 24 VDC | 310x45x30mm |

☐ | RF | PUSH |

1. New 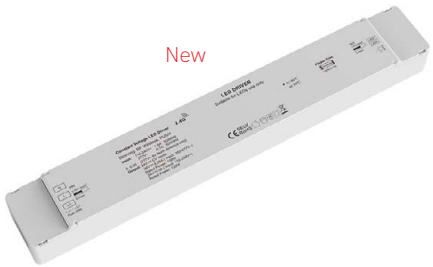

## Power Supplies Push/RF/Tuya

| | Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|---|
| 1. | 97415 | ☐ | New | 150W | IP20 | 100-277 VAC | 24 VDC | 310x45x30mm |

☐ | RF | PUSH | tuya

CE RoHS

3 YEARS WARRANTY



1. 
2. 
3. 
4. 

## Control Casambi

| | Code | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|
| 1. | 59682 | Touch Dimmer Casambi 4C Oak/Black | - | - | Ø73x62mm |
| 2. | 59689 | Touch Dimmer Casambi 4C Oak/Silver | - | - | Ø73x62mm |
| 3. | 59182 | Touch Dimmer Casambi 4C Mahogany/Black | - | - | Ø73x62mm |
| 4. | 59189 | Touch Dimmer Casambi 4C Mahogany/Silver | - | - | Ø73x62mm |

CASAMBI

5. 


New
6. 


New
7. 

8. 

9. 

New
10. 

11. 

12. 

12. 

14. 

## Control Casambi

| | Code | | | Version | Power Max | VAC IN | Size |
|---|---|---|---|---|---|---|---|
| 5. | 59112 | ■ | | Casambi Wall touch panel Black | - | - | 146x90x24mm |
| 6. | 59847 | ■ | New | Casambi Touch Control<br>(Includes 24VDC power supply and gateway code 57452) | - | 220/230VAC | 86x86x26mm |
| 7. | 57661 | ■ | New | Casambi Control 4 buttons + wheel | - | - | 66x63mm |
| 8. | 57241 | □ | | Xpress Casambi White | - | - | 90x90x12mm |
| 9. | 57242 | ■ | | Xpress Casambi Black | - | - | 90x90x12mm |
| 10. | 57299 | □ | New | Casambi Control On/Off, dimming, CCT, scene | - | - | 134 x 36 x 9mm |
| 11. | 59121 | □ | | Wall switch batteryfree 2C White | - | - | 81x81x14mm |
| 12. | 59122 | ■ | | Wall switch batteryfree 2C Anthracite | - | - | 81x81x14mm |
| 13. | 59141 | □ | | Wall switch batteryfree 4C White | - | - | 81x81x14mm |
| 14. | 59142 | ■ | | Wall switch batteryfree 4C Anthracite | - | - | 81x81x14mm |

CASAMBI

15. 

16. 

17. 

18. 

19. 

20. 

21. 

22. 

23. 

24. 

25. 

## Control Casambi

| | Code | | Version | Power Max | V IN | Size |
|---|---|---|---|---|---|---|
| 15. | 57924 | ■ | Controller input 4 button Casambi | - | 230 VAC | 45x19x17mm |
| 16. | 59629 | ■ | Smart Gateway Casambi | - | 230 VAC | 101x74x29mm |
| 17. | 59549 | ■ | Led Strips regulator 5C Casambi/Push | 5CX5A | 12-48V | 186x29x21mm |
| 18. | 59733 | □ | Relay Casambi | 10A | - | 120x50 x32mm |
| 19. | 59777 | □ | Triac Dimmable Casambi/Push | - | - | Ø52x15,5mm |
| 20. | 59249 | □ | Control CBU-PWM4 long range | 4Cx1,5A | 12-24 VDC | 72,6x30x18mm |
| 21. | 59739 | ■ | Relay Casambi | 10A | 200-240 VAC | 35x22x35mm |
| 22. | 59519 | ■ | Led Strips regulator 1C Casambi/Push | 12A | 12-48V | 44x57x19mm |
| 23. | 59769 | □ | Controller End of phase long range | 0,43A | 85-240 VAC | 72,6x30x18mm |
| 24. | 59789 | □ | Interface 0-10/1-10 Dali long range | - | 220-240 VAC | 40,4x36,2x14mm |
| 25. | 57588 | ■ | Controller PWM4+Push | 4Cx5A | 12-24 VDC | 88x54x25mm |

CASAMBI

New



26.

New



27.

New



28.

New




29.

New




30.

New



31.

New



32.

New




33.

## Control Casambi

| | Code | | | Version | Power Max | V IN | Size |
|---|---|---|---|---|---|---|---|
| 26. | 57881 | ☐ | New | Presence and illuminance mini sensor recessed White | 0,4W | 220/240 VAC | 38X38X48mm |
| 27. | 57882 | ■ | New | Presence and illuminance mini sensor recessed Black | 0,4W | 220/240 VAC | 38X38X48mm |
| 28. | 57666 | ☐ | New | Presence and illuminance sensor recessed White | 0,05A | 100-240 VAC | 79x85x85mm |
| 29. | 57662 | ☐ | New | Casambi Gateway 2 output 0-10V, 1-10V or 1 DALI | - | 100-277 VAC | 76x26x23mm |
| 30. | 59289 | ■ | New | Led Strips regulator 2C Casambi/Push | 10A | 12-48 VDC | 136x29x21mm |
| 31. | 57452 | ■ | New | Casambi Gateway 45 profiles 8 groups / 8 scenes | - | 100-254 VAC | 57x44x25mm |
| 32. | 57400 | ■ | New | Waterproof box 2XM20 for input and output. IP66 | - | - | 131x68x37mm |
| 33. | 57001 | ■ | New | Timer Casambi | - | 12-48 VDC | 58x45x25mm |

CASAMBI

CE RoHS

3 YEARS WARRANTY | IP 20

# LED Strips accessories

1. 
2. 
3. 
4. 
5. 
6. 

## Control Basic

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 90990 | ☐ | RF Mono Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 2. | 89260 | ☐ | RF CCT Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 3. | 88460 | ☐ | RF RGB Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 4. | 91430 | ☐ | RF RGB-W Remote Basic | - | 5 VDC (3xAAA) | 120x46x18mm |
| 5. | 86019 | ☐ | Controller Mono/CCT/RGB Basic | 3Cx5A | 12-24 VDC | 145x46x18mm |
| 6. | 87029 | ☐ | Controller RGB-W Basic | 5Cx5A | 12-24 VDC | 145x46x18mm |

RF

1. 
2. 
3. 
4. 
5. 
6. 
7. 

## Control Top

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 81990 | ■ | | RF Mono Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 2. | 80260 | ■ | | RF CCT Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 3. | 79430 | ■ | | RF RGB-W Remote Top | - | 4,5 VDC (3xAAA) | 120x55x17mm |
| 4. | 77019 | ☐ | | Controller Mono/CCT/RGB/RGB-W Top | 4Cx5A | 12-23 VDC / 5Ax4C | 178x46x18mm |
| 5. | 82995 | ☐ | | RF Mono Button Panel Top | - | 24 VDC | 86x86x41mm |
| 6. | 83475 | ■ | | RF RGB-W Button Panel Top Black | - | 24 VDC | 86x86x41mm |
| 7. | 83475-1 | ☐ | New | RF RGB-W Button Panel Top White | - | 24 VDC | 86x86x41mm |

RF

CE RoHS

3 YEARS WARRANTY | IP 20

1. 
2. 
3. 
4. 
5. 



## Control SPI

| | Code | | Version | Power Max | Pixels Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 92353 | ■ | SPI 1 Zone RGB/RGB-W Remote | - | - | 3VDC (CR2032) | 107x58,5x9mm |
| 2. | 92473 | □ | Controller SPI (RGB/RGB-W) | 8A | 1.024 | 5-24 VDC | 97x33x18mm |
| 3. | 92853 | □ | Controller SPI / Tuya (RGB/RGB-W) | 8A | 1.000 | 5-24 VDC | 114x38x20mm |
| 4. | 92553 | □ | SPI Signal Repeater | - | - | 5-24 VDC | 52x52x126mm |
| 5. | 92699 | ■ | Controller SPI / Computer | - | 2.048 | 5-24 VDC | 159x89x24mm |

tuya | RF | SPI

1. 
2. 
3. 
4. 
5. 
6. 

## Control DMX

| | Code | | Version | Power Max | V IN | Size |
|---|---|---|---|---|---|---|
| 1. | 96009 | □ | Controller DMX / Triac 2CH | 2Cx1A | 100-240 VAC | 170x50x23mm |
| 2. | 93470 | ■ | RF RGB-W DMX Touch Panel 4 Zone | - | 100-240 VAC | 86x86x33mm |
| 3. | 95153 | □ | Amplifier DMX 2CH | - | 12-48 VDC | 175x45x27mm |
| 4. | 93579 | ■ | Decoder DMX 5152 5CH | 5Cx4A | 12-48 VDC | 175x46x24mm |
| 5. | 95479 | ■ | Decoder DMX 5152 4CH | 4Cx5A | 12-48 VDC | 175x46x24mm |
| 6. | 95179 | □ | Decoder DMX 5152 1CH | 15A | 12-24 VDC | 170x50x23mm |

DMX

CE RoHS

1. 
2. 
3. 
4. 
5. 
6. 

## Control Push / Triac

| | Code | | Version | Power Max | V IN | Size |
|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | RF Dimming | - | 3 VDC (CR2032) | 139x36x11mm |
| 2. | 85894 | ■ | RF Dimming 4 Zones | - | 3 VDC (CR2032) | 138x50x22mm |
| 3. | 84431 | □ | RF Dimming Panel | - | 3 VDC (CR2032) | 86x86x23mm |
| 4. | 84432 | ■ | RF Dimming Panel | - | 3 VDC (CR2032) | 86x86x23mm |
| 5. | 85876 | □ | Controller Wifi RF Push Triac Tuya | 1,5A | 100-240 VAC | 52x52x26mm |
| 6. | 85884 | □ | Controller RF Push Triac | 2A | 100-240 VAC | 110x48x67mm |

tuya | PUSH | DALI

1. 
2. 
3. 
4. 
5. 
6. 

## Control PMW / RF

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 85890 | ■ | RF Dimming | - | 3VDC (CR2032) | 139x36x11mm |
| 2. | 85894 | ■ | RF Dimming 4 Zones | - | 3VDC (CR2032) | 138x50x22mm |
| 3. | 84431 | □ | RF Dimming Panel | - | 3 VDC (CR2032) | 86x86x23mm |
| 4. | 84432 | ■ | RF Dimming Panel | - | 3 VDC (CR2032) | 86x86x23mm |
| 5. | 22799 | □ | Controller Push/RF Progressive | 8A | 12-48 VDC | 120x43x27mm |
| 6. | 22726 | □ | Control Push - Dim / RF | 8A | 5-36 VDC | 97x33x18mm |

RF | PMW

CE RoHS

3 YEARS WARRANTY | IP 20




New

## Control Dali touch

| Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|
| 29187 | ■ New | Controller Dali DT8 2GR/10 scenes | 10A | 12-24 VDC | 86X86X26mm |




New

## Control Dali SPI APP

| Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|
| 29735 | ■ New | Controller Dali SPI APP | 7A | 5-12-24 VDC | 120x29x21mm |



## Control Dali Push Triac

| Code | | Version | Power Max | VAC IN | Size |
|---|---|---|---|---|---|
| 22948 | □ | Controller Dali+Push/Triac | 1,5A | 100-240 VAC | 187x46x22mm |




New

## Control Dali Push

| Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|
| 29777 | ■ New | Controller Dali 4CH | 10A | 12-24 VDC | 88x54x26mm |

CE RoHS

3 YEARS WARRANTY | IP 20



New

## Led Driver CC Dali

| | Code | | | Power Max | VDC IN | VDC OUT | I OUT | Size |
|---|---|---|---|---|---|---|---|---|
| 1. | CCT-10DA | ☐ | New | 10W | 100-277 VAC | 3-42 VDC | 100-450mA | 135x30x20mm |
| 2. | CCT-20DA | ☐ | New | 20W | 100-277 VAC | 3-42 VDC | 250-700mA | 160x43x20mm |
| 3. | CCT-40DA | ☐ | New | 40W | 100-277 VAC | 3-65 VDC | 300-1.400mA | 172x54x20mm |
| 4. | CCT-60DA | ☐ | New | 60W | 100-277 VAC | 3-65 VDC | 600- 2.100mA | 192x62x24mm |



1.



2.

## Control Dali Push

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22490 | ☐ | Controller PWM Dali Push 1-10V | 12A | 12-24-48 VDC | 155x51x26mm |
| 2. | 22499 | ☐ | Controller PWM Dali Push 1-10V | 5A | 12-24-48 VDC | 132x22x20mm |

PUSH | DALI

CE RoHS

3 YEARS WARRANTY | IP 20



New

## Led Driver CC Triac

| | Code | | | Power Max | VDC IN | VDC OUT | I OUT | Size |
|---|---|---|---|---|---|---|---|---|
| 1. | CCT-10TR | ☐ | New | 10W | 220-240 VAC | 3-42 VDC | 100-450mA | 135x30x20mm |
| 2. | CCT-20TR | ☐ | New | 20W | 220-240 VAC | 3-42 VDC | 250-700mA | 160x43x20mm |
| 3. | CCT-40TR | ☐ | New | 40W | 220-240 VAC | 3-65 VDC | 300-1.400mA | 172x54x20mm |
| 4. | CCT-60TR | ☐ | New | 60W | 220-240 VAC | 3-65 VDC | 600- 2.100mA | 192x62x24mm |

TRIAC DIMM

1. 

2. 

## Control Driver RF / Push

| | Code | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|
| 1. | 22911 | ☐ | Controller 4CH RF Push | 3-45 VDC/150-500mA | 12-48 VDC | 139x36x11mm |
| 2. | 22974 | ☐ | Controller 4CH RF Push | 3-45 VDC/350-1.200mA | 12-48 VDC | 138x50x22mm |

RF | PUSH

CE RoHS

3 YEARS WARRANTY | IP 20



1. 

2. 

3. 

4. 

5. 

## Motion Sensor

| | Code | | Version | Power Max | V IN | Size |
|---|---|---|---|---|---|---|
| 1. | 85993 | ■ | Mini Sensor Mono PWM | 6A | 12-24 VDC | 55x10mm |
| 2. | 85263 | ■ | Mini Sensor CCT PWM | 2Cx4A | 12-24 VDC | 55x10mm |
| 3. | 85183 | ■ | Motion Sensor Pir | 8A | 12-24 VDC | 55x10mm |
| 4. | 85332 | ○ | Motion Sensor Surface Pir | 4A | 12-24 VDC | 45x62mm |
| 5. | 85999 | ○ | Microwave induction dimmer & switch | 4A | 100-240 VAC | 95x40mm |

1. 

2. 
New

3.
4. 

5. 
New

6. 

7. 
New

8.
9. 

10. 
New

## Motion Sensor

| | Code | | | Version | Power Max | VDC IN | Size |
|---|---|---|---|---|---|---|---|
| 1. | 85220 | □ | | Sensor Pir Double Surface hand/door | 4A | 12-24 VDC | 12x12mm |
| 2. | 85290 | ■ | New | Sensor Pir Double Surface hand/door | 4A | 12-24 VDC | 12x12mm |
| 3. | 85120 | □ | | Sensor Simple Surface door | 4A | 12-24 VDC | 12x12mm |
| 4. | 85420 | □ | | Sensor Simple Surface hand | 4A | 12-24 VDC | 12x12mm |
| 5. | 85190 | ■ | New | Sensor Simple Surface hand | 4A | 12-24 VDC | 12x12mm |
| 6. | 85626 | ○ | | Sensor Pir Double Recessed hand/door | 4A | 12-24 VDC | 14x18mm |
| 7. | 85696 | ● | New | Sensor Pir Double Recessed hand/door | 4A | 12-24 VDC | 14x18mm |
| 8. | 85336 | ○ | | Sensor Simple Recessed door | 4A | 12-24 VDC | 14x18mm |
| 9. | 85330 | ○ | | Sensor Simple Recessed hand | 4A | 12-24 VDC | 14x18mm |
| 10. | 85396 | ● | New | Sensor Simple Recessed hand | 4A | 12-24 VDC | 14x18mm |

CE RoHS

3 YEARS WARRANTY | IP 20

# Power Supplies 24V

## Power Supplies Standard

| Code | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|
| 62430 ☐ | 30W | IP20 | 198-264 VAC | 24 VDC | 162x42x30mm |
| 62460 ☐ | 60W | IP20 | 198-264 VAC | 24 VDC | 187x45x30mm |
| 62475 ☐ | 75W | IP20 | 198-264 VAC | 24 VDC | 187x45x30,5mm |
| 62412 ☐ | 120W | IP20 | 198-264 VAC | 24 VDC | 268x45x30,5mm |
| 62415 ☐ | 150W | IP20 | 198-264 VAC | 24 VDC | 268x45x30,5mm |



## Power Supplies Basic

| Code | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|
| 22420 ☐ | 24W | IP67 | 176-264 VAC | 24 VDC | 110x40x30mm |
| 22435 ☐ | 40W | IP67 | 176-264 VAC | 24 VDC | 148x40x30mm |
| 22460 ☐ | 60W | IP67 | 176-264 VAC | 24 VDC | 162,5x42,5x32mm |
| 22410 ☐ | 100W | IP67 | 176-264 VAC | 24 VDC | 190x52x33mm |



## Power Supplies Top

| Code | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|
| 22415 ☐ | 150W | IP67 | 90-264 VAC | 24 VDC | 191x63x37,5mm |
| 22424 ☐ | 240W | IP67 | 90-305 VAC | 24 VDC | 244,2x68x38,8mm |
| 22430 ☐ | 300W | IP67 | 90-305 VAC | 24 VDC | 246x77x39,5mm |
| 22432 ☐ | 320W | IP67 | 90-305 VAC | 24 VDC | 252x90x43,8mm |



## Power Supplies Slim

| Code | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|
| TR3024 ☐ | 30W | IP20 | 220-240V VAC | 24 VDC | 300x30x16mm |
| TR6024 ☐ | 60W | IP20 | 220-240V VAC | 24 VDC | 300x30x16mm |
| TR10024 ☐ | 100W | IP20 | 220-240V VAC | 24 VDC | 350X30X18mm |
| TR16024 ☐ | 150W | IP20 | 220-240V VAC | 24 VDC | 350X30X18mm |



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

## Power Supplies Triac

| Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|
| 24609 | ☐ | | 60W | IP20 | 200-240 VAC | 24 VDC | 178x61x24mm |
| 24109 | ■ | | 100W | IP66 | 200-240 VAC | 24 VDC | 230x70x43mm |
| 24159 | ■ | | 150W | IP66 | 200-240 VAC | 24 VDC | 256x78x47mm |
| 24309 | ■ | | 300W | IP66 | 200-240 VAC | 24 VDC | 276x78x47mm |
| TR10024TR | ☐ | New | 100W | IP20 | 200-240 VAC | 24 VDC | 330x30x22mm |
| TR15024TR | ☐ | New | 150W | IP20 | 200-240 VAC | 24 VDC | 330x30x22mm |





New

TRIAC DIMM

## Power Supplies Dali-2 / Push

| Code | | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|---|
| 64458 | ☐ | | 45W | IP20 | 176-264 VAC | 24 VDC | 187x45x30,5mm |
| 64808 | ☐ | | 80W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |
| 64158 | ☐ | | 150W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |
| TR3024DA | ☐ | New | 12-30W | IP20 | 200-240 VAC | 24 VDC | 300x30x16mm |
| TR6024DA | ☐ | New | 60W | IP20 | 200-240 VAC | 24 VDC | 350x30x18mm |
| TR10024DA | ☐ | New | 30-100W | IP20 | 200-240 VAC | 24 VDC | 350x30x18mm |
| TR15024DA | ☐ | New | 45-150W | IP20 | 200-240 VAC | 24 VDC | 350x30x18mm |





New

## Power Supplies Dali-2

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 24758 | ■ | 90W | IP67 | 100-305 VAC | 24 VDC | 180x63x35,5mm |
| 24108 | ■ | 120W | IP67 | 100-305 VAC | 24 VDC | 199x63x35,5mm |
| 24208 | ■ | 200W | IP67 | 100-305 VAC | 24 VDC | 219x63x35,5mm |
| 24308 | ■ | 300W | IP66 | 110-277 VAC | 24 VDC | 301x78x25,1mm |



*24208 / 24308 Push / Dali

24308

## Power Supplies Dali-2 DT-8 / Push Dim - CCT

| Code | | Power | IP | VAC IN | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 64453 | ☐ | 45W | IP20 | 176-264 VAC | 24 VDC | 187x45x30,5mm |
| 64803 | ☐ | 80W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |
| 64153 | ☐ | 150W | IP20 | 176-264 VAC | 24 VDC | 290x45x30,5mm |



CE RoHS

PF >0,9 | 3 YEARS WARRANTY

# Led strips accessories

## SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
☐ 20220



Joint
13,55x11,67x4,7mm
☐ 20120



Joint
15,4x11,5x5,7mm
☐ 20991



Joint
21,6x11,5x5,7mm
☐ 20999



L Joint
19x12x5mm
☐ 20C90 New



L Joint
19x19x5mm
☐ 20T90 New

## SMD 10mm Monocolor IP65



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,7mm
☐ 20225



Joint
24,3x14,6x7,7mm
☐ 20125

## SMD 10mm Monocolor IP67



End Cap
☐ 32635



End Cap
☐ 32625

## Fine 32 / Fine 75 IP65



End Cap
☐ 32635



End Cap
☐ 32625



Connector kit
☐ 32699



Join 180°
☐ 32899



Join 90°
☐ 32499



Clip
☐ 32900



Joint
☐ 32299

## COB 10mm Monocolor IP20



Joint
☐ 31709



Joint
☐ 31809



Joint
☐ 31909



L Joint
19x12x5mm
☐ 20C90 New



L Joint
19x19x5mm
☐ 20T90 New

## COB 10mm Monocolor IP67



End Cap
☐ 32635



End Cap
☐ 32625

## SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
☐ 20230



Joint
13,55x11,67x4,7mm
☐ 20130

## SMD 10mm CCT IP65



End Cap
☐ 20635



End Cap
☐ 20625



Joint
24,3x14,6x7,7mm
☐ 20235



Joint
24,3x14,6x7,7mm
☐ 20135

## SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
☐ 20240



Joint
13,56x13,46x4,7mm
☐ 20140

## SMD 10mm RGB IP65



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,68mm
☐ 20245



Joint
24,3x14,6x7,68mm
☐ 20145

## SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
☐ 20150



Joint
13,5x13,55x4,8mm
☐ 20250

## COB 12mm RGBW IP20



Joint
☐ 20066



Joint
☐ 20266

## SMD 4mm Monocolor IP20



Joint
☐ 20049



Joint
☐ 20249

## Single-wire connections



20917



20915

## Bipolar connections



20927



20925

| | | | | | |
|---|---|---|---|---|---|
| FINE 25 | 0,75 mm | 1,50 mm | – | – | – |
| FINE 30 | 1,00 mm | – | – | – | – |
| FINE 31 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 32N | 0,50 mm | 0,50 mm | 1,00 mm | 1,00 mm | 1,50 mm |
| FINE 34 | 0,35 mm | 0,35 mm | 0,50 mm | 0,75 mm | – |
| FINE 36 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 37 | 0,50 mm | 0,50 mm | 1,00 mm | 1,00 mm | 1,50 mm |
| FINE 41 | 0,50 mm | 0,75 mm | 1,50 mm | – | – |
| FINE 42 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 43 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 44 | 0,50 mm | 0,75 mm | – | – | – |
| FINE 45 | 0,35 mm | 0,50 mm | 0,75 mm | – | – |
| FINE 46 | 0,50 mm | 0,75 mm | 1,50 mm | – | – |
| FINE 47 | 0,35 mm | 0,75 mm | 1,50 mm | – | – |
| FINE 48 | 0,35 mm | 0,35 mm | 0,50 mm | – | – |
| FINE 49 | 0,50 mm | – | – | – | – |
| FINE 50 | 0,35 mm | – | – | – | – |
| FINE 51 | 0,50 mm | 0,75 mm | 1,00 mm | 1,50 mm | – |
| FINE 52 | 0,75 mm | 1,50 mm | – | – | – |
| FINE 54 | 0,50 mm | 0,75 mm | – | – | – |
| FINE 55 | 1,00 mm | – | – | – | – |
| FINE 56 | 0,75 mm | 1,50 mm | – | – | – |
| FINE 60 | 0,35 mm | 0,50 mm | – | – | – |
| FINE 61 | 0,50 mm | 0,75 mm | – | – | – |
| FINE 63 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 64 | 0,35 mm | 0,35 mm | 0,50 mm | – | – |
| FINE 66 N | 0,75 mm | 1,50 mm | – | – | – |
| FINE 68 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 69 | 0,50 mm | 0,75 mm | 1,00 mm | – | – |
| FINE 70 | 0,35 mm | 0,50 mm | 0,75 mm | – | – |
| FINE 71 | 0,75 mm | 1,50 mm | – | – | – |
| FINE 72 | 0,50 mm | 0,75 mm | – | – | – |
| FINE 74 | 0,50 mm | 0,75 mm | – | – | – |
| FINE 75 | 0,35 mm | 0,50 mm | 0,75 mm | – | – |
| FINE 76 | 0,50 mm | 0,75 mm | 1,00 mm | – | – |
| FINE 77 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 79 | 0,35 mm | 0,75 mm | 1,00 mm | – | – |
| FINE 82 | 0,50 mm | 0,75 mm | 1,00 mm | – | – |
| FINE 84 | 0,35 mm | 0,35 mm | 0,50 mm | 0,75 mm | – |
| FINE 88 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 92 | 0,35 mm | 0,75 mm | 1,00 mm | – | – |
| FINE 96 | 0,50 mm | 1,00 mm | – | – | – |
| FINE 97 | 0,50 mm | 0,75 mm | 1,00 mm | – | – |
| FINE DMX-4 | 0,50 mm | – | – | – | – |
| FINE DMX-5 | 0,50 mm | – | – | – | – |
| FINE RUNNING | 0,50 mm | – | – | – | – |
| FINE SPI-2 | 0,50 mm | – | – | – | – |
| FINE SPI-3 | 0,50 mm | – | – | – | – |
| FINE SPI-4 | 0,75 mm | – | – | – | – |

*Cable section.

# Light perception

| | Open circuit | | | | | Back feed | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| |  | | | | |  | | | | |
| | 5 mts | 10 mts | 15 mts | 20 mts | 25 mts | 5 mts | 10 mts | 15 mts | 20 mts | 25 mts |
| FINE 25 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 30 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 31 | 100% | 90% | – | – | – | 100% | 95% | – | – | – |
| FINE 32N | 100% | 98% | 95% | 92% | 90% | – | – | – | – | – |
| FINE 34 | 100% | 100% | – | – | – | – | – | – | – | – |
| FINE 36 | 100% | 86% | – | – | – | 100% | 93% | – | – | – |
| FINE 37 | 100% | 100% | 100% | 95% | 90% | 100% | 100% | 100% | 100% | 100% |
| FINE 41 | 100% | 80% | 70% | – | – | 100% | 94% | 90% | – | – |
| FINE 42 | 100% | 87% | – | – | – | 100% | 93% | – | – | – |
| FINE 43 | 100% | – | – | – | – | 100% | 98% | – | – | – |
| FINE 44 | 100% | 80% | – | – | – | 100% | 94% | – | – | – |
| FINE 45 | 100% | 80% | 70% | – | – | 100% | 94% | 85% | – | – |
| FINE 46 | 100% | 80% | 70% | – | – | 100% | 94% | 90% | – | – |
| FINE 47 | 100% | 80% | 70% | – | – | 100% | 95% | 90% | – | – |
| FINE 48 | 100% | 100% | 85% | – | – | 100% | 100% | 96% | – | – |
| FINE 49 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 50 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 51 | 100% | 100% | 100% | 100% | – | – | – | – | – | – |
| FINE 52 | 100% | 90% | – | – | – | 100% | 98% | – | – | – |
| FINE 54 | 100% | 80% | – | – | – | 100% | 90% | – | – | – |
| FINE 55 | 100% | 80% | – | – | – | 100% | 95% | – | – | – |
| FINE 56 | 100% | 80% | – | – | – | 100% | 95% | – | – | – |
| FINE 60 | 100% | 90% | – | – | – | 100% | 98% | – | – | – |
| FINE 61 | 100% | 90% | 80% | – | – | 100% | 98% | 92% | – | – |
| FINE 63 | 100% | 80% | – | – | – | 100% | 92% | – | – | – |
| FINE 64 | 100% | 100% | 90% | – | – | 100% | 100% | 96% | – | – |
| FINE 66 N | 100% | 88% | – | – | – | 100% | 95% | – | – | – |
| FINE 68 | 100% | 95% | – | – | – | 100% | 100% | – | – | – |
| FINE 69 | 100% | 95% | 90% | 85% | – | 100% | 100% | 95% | 95% | – |
| FINE 70 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 71 | 100% | 87% | – | – | – | 100% | 97% | – | – | – |
| FINE 72 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 74 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 75 | 100% | 98% | 95% | 92% | 90% | – | – | – | – | – |
| FINE 76 | 100% | 80% | 70% | – | – | 100% | 95% | 90% | – | – |
| FINE 77 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 79 | 100% | 90% | 85% | – | – | 100% | 97% | 95% | – | – |
| FINE 82 | 100% | 100% | 85% | – | – | 100% | 100% | 90% | – | – |
| FINE 84 | 100% | 95% | 90% | 85% | – | 100% | 100% | 95% | 95% | – |
| FINE 88 | 100% | – | – | – | – | – | – | – | – | – |
| FINE 92 | 100% | 100% | 85% | – | – | 100% | 100% | 90% | – | – |
| FINE 96 | 100% | 80% | – | – | – | 100% | 95% | – | – | – |
| FINE 97 | 100% | 95% | 90% | – | – | 100% | 100% | 95% | – | – |
| FINE DMX-4 | 100% | – | – | – | – | – | – | – | – | – |
| FINE DMX-5 | 100% | – | – | – | – | – | – | – | – | – |
| FINE RUNNING | 100% | – | – | – | – | – | – | – | – | – |
| FINE SPI-2 | 100% | – | – | – | – | – | – | – | – | – |
| FINE SPI-3 | 100% | – | – | – | – | – | – | – | – | – |
| FINE SPI-4 | 100% | – | – | – | – | – | – | – | – | – |

*Efficiency (%).

# Profiles and Led strips compatibility table

| | FINE 30 | FINE 31 | | FINE 32/N | FINE 36 | FINE 37 | FINE 41 | | FINE 42 | FINE 43 | FINE 44 | FINE 45 | | FINE 46 | | FINE 47 | | FINE 48 | | FINE 49 | FINE 50 | FINE 51 | | FINE 52 | | FINE 54 | | FINE 55 | FINE 56 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | IP-20 | IP-20 | IP-67 | IP-65 | IP-20 | IP-20 | IP-20 | IP-65 | IP-20 | IP-20 | IP-20 | IP-20 | IP-65 | IP-20 | IP-65 | IP-20 | IP-67 | IP-20 | IP-65 | IP-20 | IP-20 | IP-20 | IP-65 | IP-20 | IP-67 | IP-20 | IP-65 | IP-20 | IP-20 |
| **BOX 10** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 11** | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | OK | NO | NO | NO | NO | NO | NO | NO | NO |
| **BOX 12** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 13** | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | OK | NO | NO | NO | NO | NO | NO | NO | NO |
| **BOX 14** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | NO | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 15** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 16** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 17** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 18** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 19** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 21** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 22** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 23** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO |
| **BOX 24** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 27** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 28** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 29** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 30 (12)** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 30 (20)** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | NO |
| **BOX 32** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 33** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 35** | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| **BOX 37** | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| **BOX 38** | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| **BOX 39** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 43** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | NO |
| **BOX 53** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO |
| **BOX 60** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 65** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | NO | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 67** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 68** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 69** | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| **BOX 71** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | NO |
| **BOX 73** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 74** | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | NO |
| **BOX 75** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 87** | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | OK | NO | NO | NO | NO | NO | NO | NO | NO |
| **BOX 92** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 95** | NO | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 98** | NO | OK | NO | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | NO | NO | OK | OK | OK | OK | OK | NO | NO | NO | OK | NO | NO | NO |
| **BOX 99** | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | OK | NO | NO | NO | NO | NO | NO | NO | NO |

BENEITO FAURE®

| FINE 60 | FINE 61 | | FINE 63 | | FINE 64 | FINE 66/N | | FINE 68 | FINE 69 | | FINE 71 | | FINE 75 | FINE 76 | FINE 79 | | FINE 82 | FINE 84 | | FINE 88 | FINE 92 | FINE 97 | SP1 | SP2 | | SP3 | | DMX4 | | DMX5 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IP-20 | IP-20 | IP-65 | IP-20 | IP-65 | IP-20 | IP-20 | IP-65 | IP-20 | IP-20 | IP-65 | IP-20 | IP-67 | IP-65 | IP-20 | IP-20 | IP-65 | IP-20 | IP-20 | IP-65 | IP-20 | IP-20 | IP-20 | IP-20 | IP-20 | IP-65 | IP-20 | IP-65 | IP-20 | IP-67 | IP-20 | IP-65 |
| OK | OK | OK | OK | NO | OK | OK | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| NO | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | NO | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | NO | NO | NO | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | OK | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | OK | NO | NO | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| NO | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | NO | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | NO | NO | NO | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | NO | NO | OK | OK | OK | NO | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| OK | OK | OK | OK | OK | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | NO | NO | NO | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK |
| OK | OK | OK | OK | NO | OK | OK | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| OK | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | OK | OK | NO | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| OK | OK | OK | OK | NO | OK | OK | NO | OK | OK | OK | OK | NO | NO | OK | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | OK | NO |
| NO | OK | OK | NO | NO | OK | NO | NO | NO | OK | OK | NO | NO | NO | NO | OK | NO | OK | OK | OK | OK | OK | OK | OK | OK | NO | OK | NO | NO | NO | NO | NO |
| NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | OK | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |


FURNITURE
INTERESTING BOOK
DESIGN
FURNITURE
INTERESTING BOOK
BOOK №3
DESIGN



# Three phase track

# Three phase track surface accessories

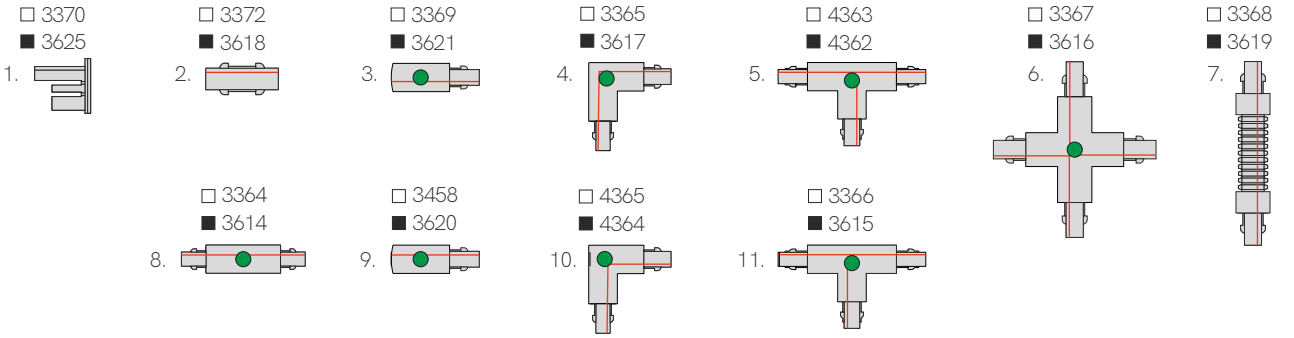


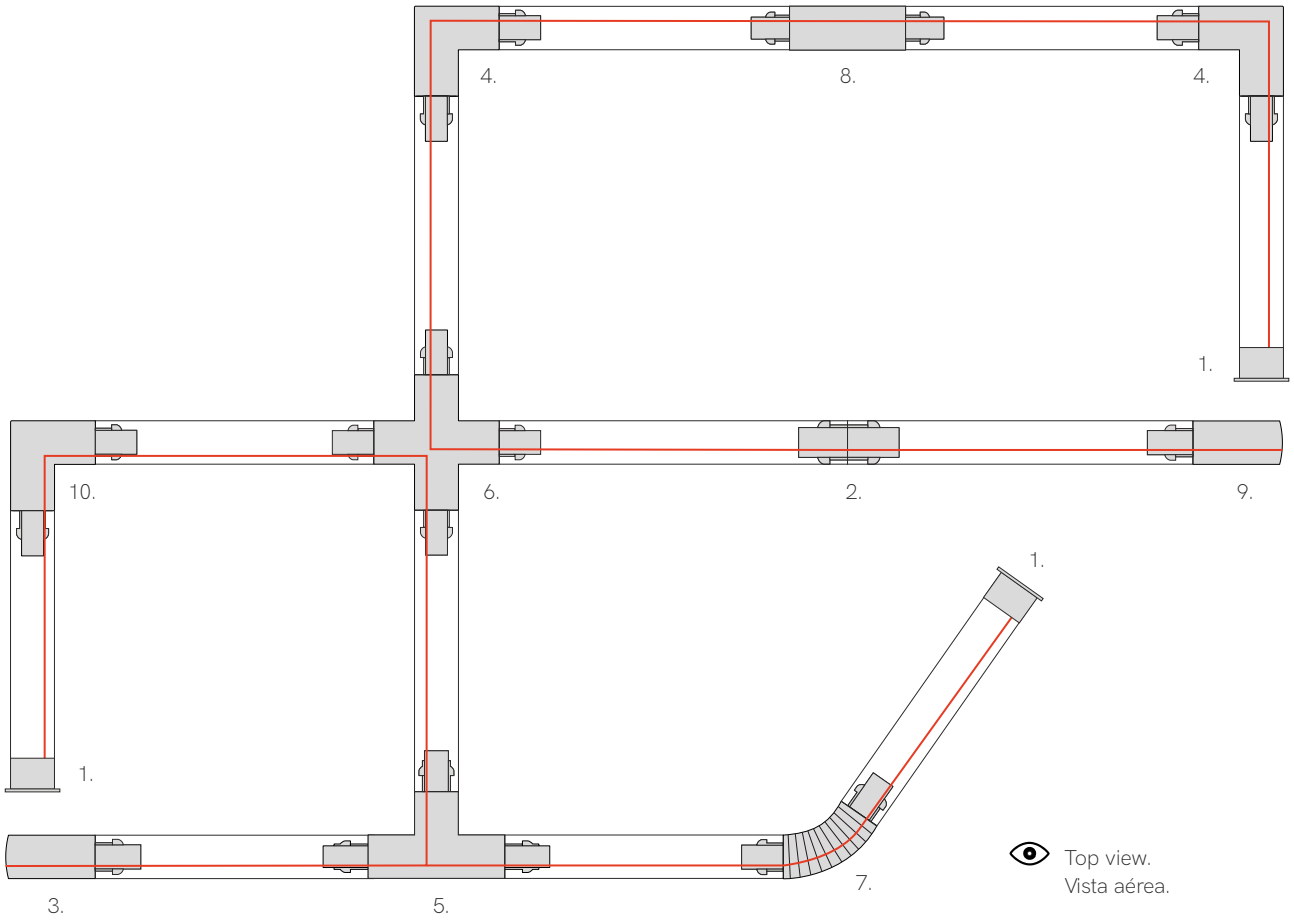


● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

## Three phase track surface

W: 32mm H: 31mm

| | | |
|---|---|---|
| ☐ | 1m | 3795 |
| ☐ | 2m | 3796 |
| ☐ | 3m | 3797 |
| ■ | 1m | D-3626 |
| ■ | 2m | D-3627 |
| ■ | 3m | D-3628 |



## Ceiling fixing 3PH surface

L: 30mm W: 25mm H: 12mm

| | |
|---|---|
| ☐ | 3373 |
| ■ | 3623 |



## Power supply 3PH surface

L: 98mm W: 32mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 3369 |
| ☐ | Right | 3458 |
| ■ | Left | 3621 |
| ■ | Right | 3620 |



## Linear joint 3PH without spacing

L: 68mm W: 25mm H: 27mm

| | |
|---|---|
| ☐ | 3372 |
| ■ | 3618 |



## Linear joint 3PH with spacing surface

L: 166mm W: 35mm H: 32mm

| | |
|---|---|
| ☐ | 3364 |
| ■ | 3614 |



## L joint 3PH surface

L: 100mm W: 66mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 4365 |
| ☐ | Right | 3365 |
| ■ | Left | 4364 |
| ■ | Right | 3617 |



## T joint 3PH surface

L: 166mm W: 100mm H: 32mm

| | | |
|---|---|---|
| ☐ | Left | 4363 |
| ☐ | Right | 3366 |
| ■ | Left | 4362 |
| ■ | Right | 3615 |



## X joint 3PH surface

L: 166mm W: 166mm H: 32mm

| | |
|---|---|
| ☐ | 3367 |
| ■ | 3616 |



## Flexible joint 3PH

L: 245mm W: 35mm H: 32mm

| | |
|---|---|
| ☐ | 3368 |
| ■ | 3619 |



## End cap 3PH

L: 32mm W: 32mm H: 32mm

| | |
|---|---|
| ☐ | 3370 |
| ■ | 3625 |



## Adapter 3PH

L: 70mm W: 40mm H: 41mm

| | |
|---|---|
| ☐ | 3371-V2 |
| ■ | 3624-V2 |



## Suspension kit 3PH

L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

| | |
|---|---|
| ☐ | 3459 |
| ■ | 3622 |



## Surface base 3PH

L: Ø100mm H: 32mm

| | |
|---|---|
| ○ | 4700 |
| ● | 4701 |

Surface Common Base

# Three phase track recessed accessories

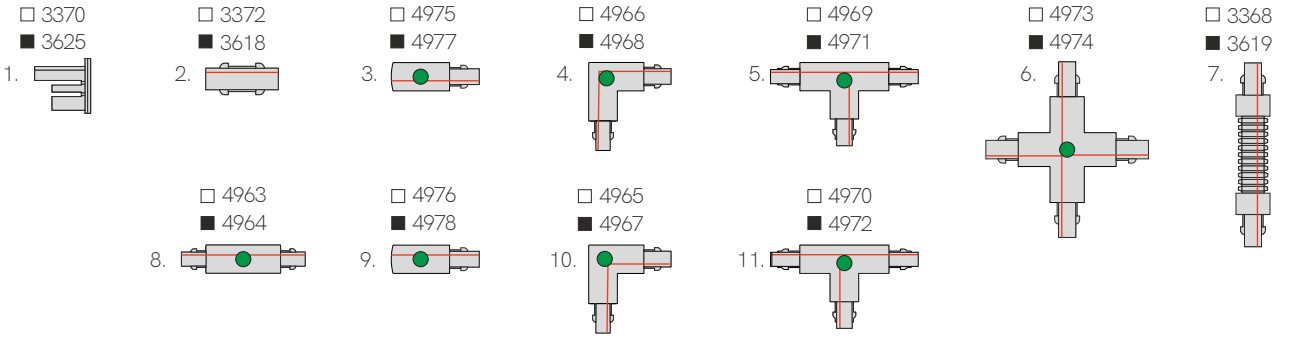


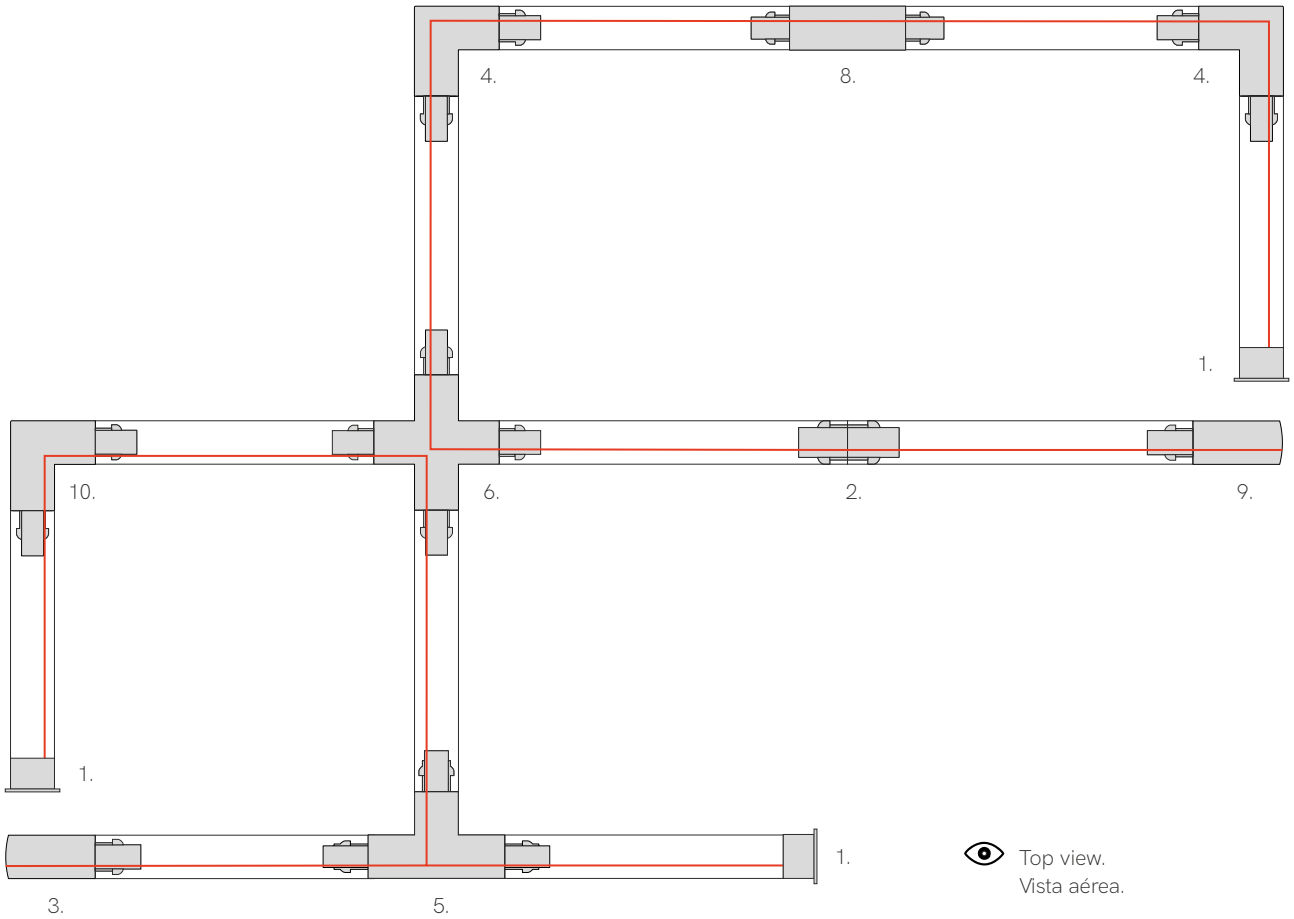


● Allows power input

CE RoHS

3 YEARS WARRANTY | IP 20



*End cap and power supply included

## Three phase track recessed
W: 56mm H: 33mm

| | | |
|---|---|---|
| ☐ | 2m | 3897 |
| ☐ | 3m | 3898 |
| ■ | 2m | 4753 |
| ■ | 3m | 4754 |



## Ceiling fixing 3PH recessed
L: 64mm W: 25mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3805 | |



## Power supply 3PH recessed
L: 98mm W: 56,5mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4975 |
| ☐ | Right | 4976 |
| ■ | Left | 4977 |
| ■ | Right | 4978 |



## Linear joint 3PH without spacing
L: 68mm W: 25mm H: 27mm

| | | |
|---|---|---|
| ☐ | 3372 | |
| ■ | 3618 | |



## Linear joint 3PH with spacing recessed
L: 166mm W: 56,5mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | 4963 | |
| ■ | 4964 | |



## Flexible joint 3PH
L: 245mm W: 35mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3368 | |
| ■ | 3619 | |



## L joint 3PH recessed
L: 111mm W: 111mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4965 |
| ☐ | Right | 4966 |
| ■ | Left | 4967 |
| ■ | Right | 4968 |



## T joint 3PH recessed
L: 166mm W: 111mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | Left | 4969 |
| ☐ | Right | 4970 |
| ■ | Left | 4971 |
| ■ | Right | 4972 |



## X joint 3PH recessed
L: 166mm W: 166mm H: 33,7mm

| | | |
|---|---|---|
| ☐ | 4973 | |
| ■ | 4974 | |



## End cap 3PH
L: 32mm W: 32mm H: 32mm

| | | |
|---|---|---|
| ☐ | 3370 | |
| ■ | 3625 | |



## Adapter 3PH
L: 70mm W: 40mm H: 41mm

| | | |
|---|---|---|
| ☐ | 3371-V2 | |
| ■ | 3624-V2 | |



## Recessed base 3PH
L: Ø130mm H: 60mm Ø110mm

| | | |
|---|---|---|
| ○ | 3851 | |
| ● | 3852 | |

*Need Three Phase Surface Base (4700 or 4701) to put inside.

Recessed Common Base




Härko Luxury Beds, Barcelona (Spain).

## Picolo 3PH








## Technical Information

| | |
|---|---|
| Power | 9,5W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.300 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 4437 |
| | ● 4438 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.
*Surface and recessed base included with Picolo base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

## Picolo GU10 3PH






## Picolo AR111 3PH








### Technical Information

| | Picolo GU10 3PH | Picolo AR111 3PH |
|---|---|---|
| Installation | Three Phase Track | Three Phase Track |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White |
| Bulbholder | 50mm GU10 (except Power bulb) | 111mm GU10 |
| Code | ○ 3990-V3 | ○ 4435 |
| | ● 3989-V3 | ⓘ Custom RAL |
| | ⓘ Custom RAL | |
| | 3 YEARS WARRANTY \| 1/20 | 5 YEARS WARRANTY \| 1/40 |

ⓘ Consult delivery terms and conditions.

### Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS

*GU10 bulbholder included.

IP 20 | 220/240 VAC |



## Cookie 3PH








## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Threee Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 985 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 5179 |
| | ● 5180 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20



## Zoom 3PH




Power and CTT switch








## Technical Information

| | |
|---|---|
| Power | Switch 15W / 20W / 25W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | | |
|---|---|---|
| | ○ | 4900 |
| | ● | 4901 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 15° - 55° | 50/60 Hz | IK06 | +45°C -20°C | CCT SWITCH | POWER SWITCH | 1/10




Óptica Rapp , La Laguna. Tenerife (Spain). Design: Grupo Globarq. Photography: Kuo estudio.

## Aston 3PH






## Konic 3PH






## Technical Information

| | | |
|---|---|---|
| Power | 20W | 30W |
| Installation | Three Phase Track | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm | 2.440 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 4439 | ○ 4985-N |
| | ● 4440 | ● 4986-N |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CRI ≥80 | CRI ≥94 | TRIAC DIMM

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | 15° 38° 60° | 50/60 Hz | +40°C -15°C | CCT SWITCH | 1/8



## Mini Tram 3PH









## Tram 3PH











## Technical Information

| | Mini Tram 3PH | Tram 3PH |
|---|---|---|
| Power | 20W | 30W |
| Installation | Three Phase Track | Three Phase Track |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 2.320 lm / 2.400 lm | 3.520 lm / 3.600 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 4427 | ☐ | 3.000K | 4541 |
| | ☐ | 4.000K | 4428 | ☐ | 4.000K | 4542 |
| | ■ | 3.000K | 4429 | ■ | 3.000K | 4543 |
| | ■ | 4.000K | 4430 | ■ | 4.000K | 4544 |
| | | | 5 YEARS WARRANTY | | | 3 YEARS WARRANTY |

CE RoHS

30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +45°C -20°C | 1/10



## Kom 3PH 20W






## Kom 3PH 30W






## Kom 3PH 40W






## Technical Information

| | Kom 3PH 20W | Kom 3PH 30W | Kom 3PH 40W |
|---|---|---|---|
| Power | 20W | 30W | 40W |
| Installation | Three Phase Track | Three Phase Track | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | 3.000K / 4.000K |
| Lumens | 2.300 lm | 2.470 lm | 4.500 lm / 4.600 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ 4337 | ☐ 4336-N | ☐ 3.000K 4444 |
| | ■ 4339 | ■ 4338-N | ☐ 4.000K 4445 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ■ 3.000K 4447 |
| | | | ■ 4.000K 4448 |
| | | | ⓘ Custom RAL |
| | CRI ≥80 \| CCT SWITCH | CRI ≥94 \| CCT SWITCH | CRI ≥80 |

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | | 15° 24° 40° | 50/60 Hz | +50°C -20°C | 1/10

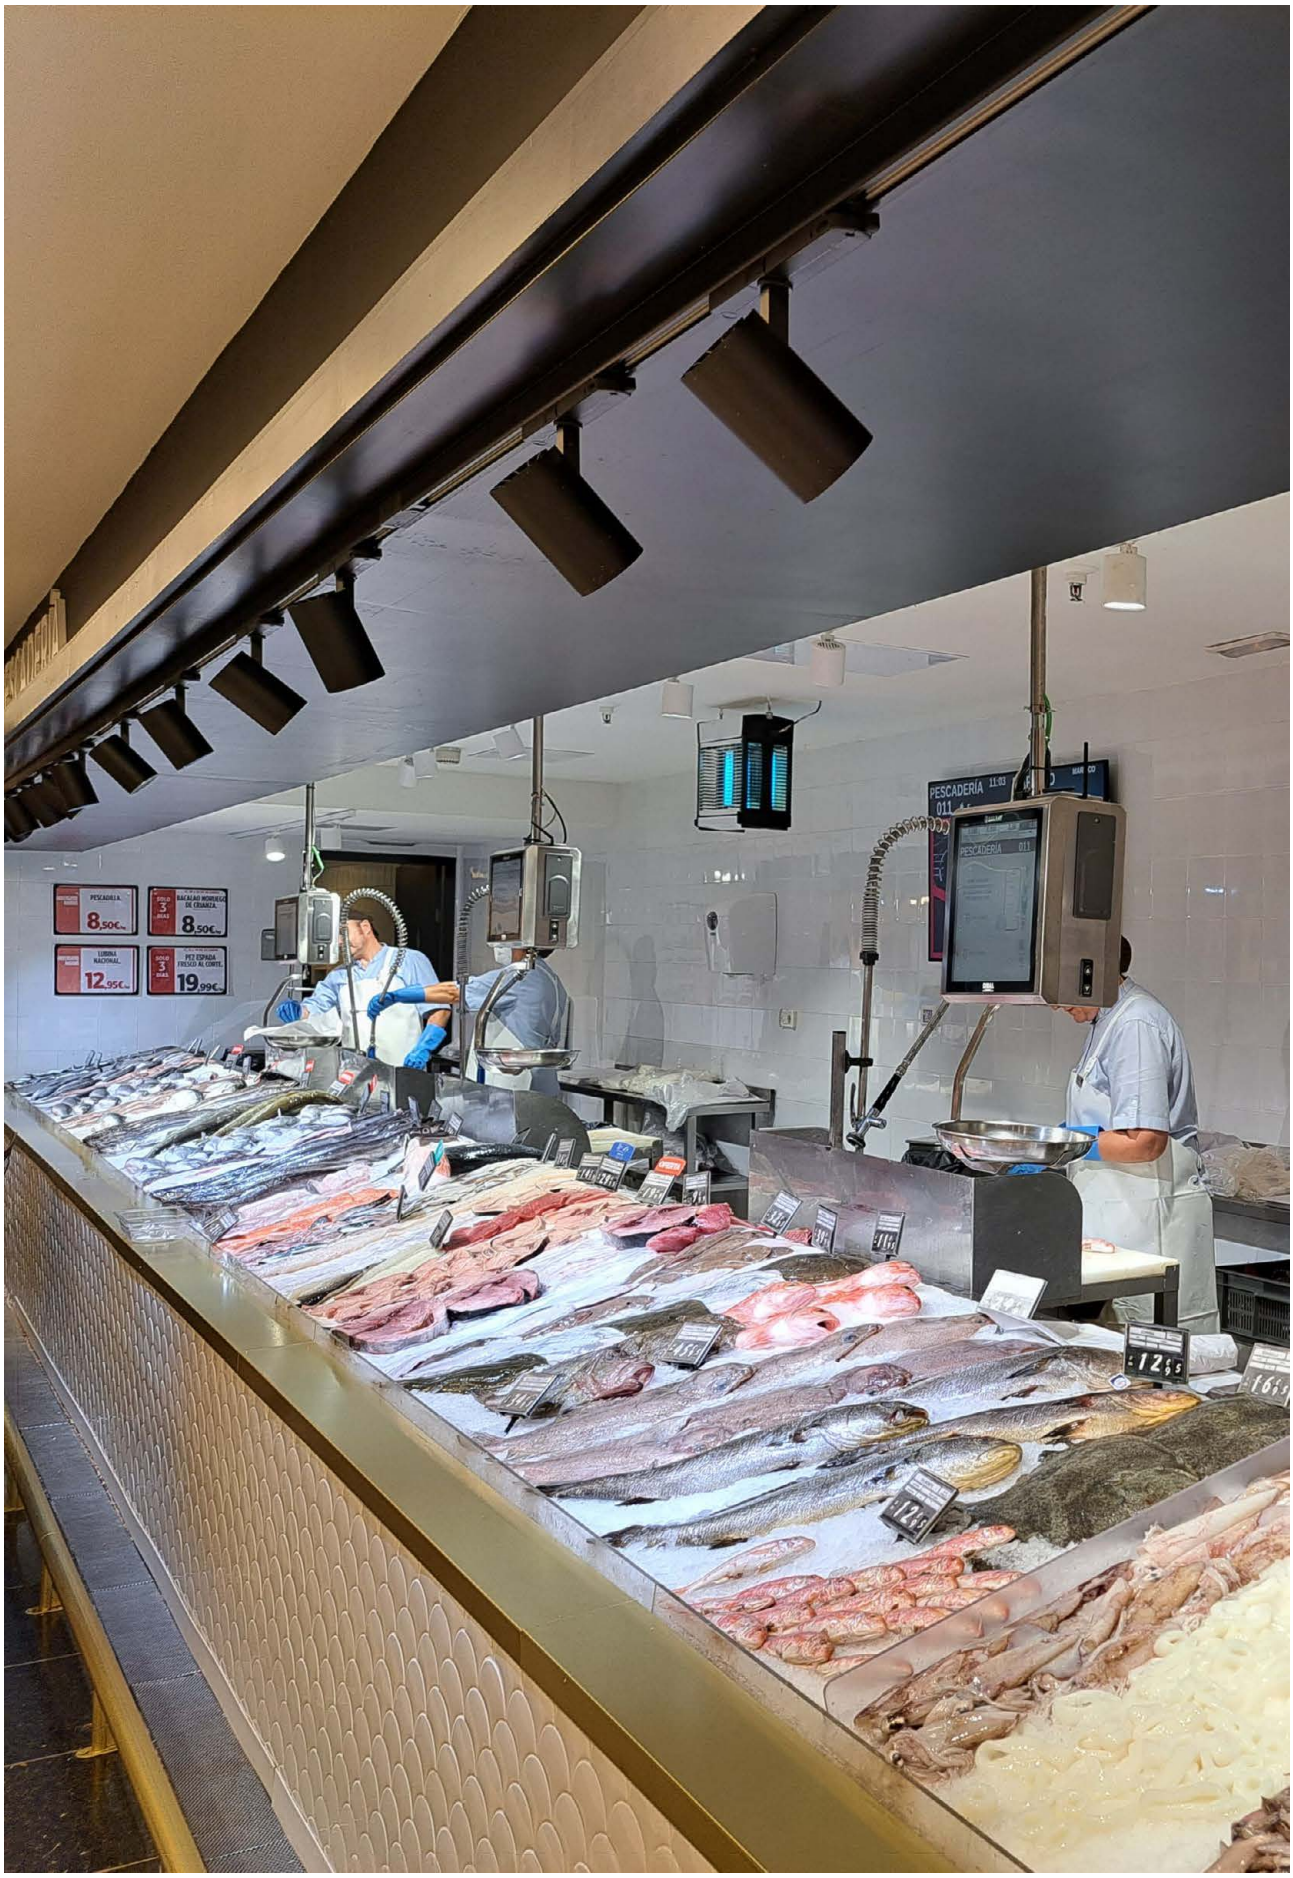
PESCADERÍA
PESCADILLA
8,50€
BACALAO NORUEGO DE CRIANZA
8,50€
LUBINA NACIONAL
12,95€
PEZ ESPADA FRESCO AL CORTE
19,99€

## Lonja 3PH








### Technical Information

| | |
|---|---|
| Power | 22W |
| Lumens | 1.628 lm - 2.662 lm |
| Installation | Three Phase Track |
| Material | Aluminium |
| Finishes | White (9003) / Black (9005) |

| Code | | Diffuser (Angle) | | Size | | CCT (Lm) | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 3 | Transparent (15°) | 1 | | 9 | FISH - 5.500K 2.662 lm | 1 | On/Off | 1 | White | 1 |
| | | Transparent (24°) | 6 | | | 3.000K 2.100 lm | 3 | Triac | 4 | Black | 2 |
| | | Transparent (36°) | 8 | | | 4.000K 2.206 lm | 4 | | | Custom RAL | |
| | | | | | | MEAT R - 1.950K 1.650 lm | 5 | | | | |
| | | | | | | FRUIT - 2.700K 2.310 lm | 6 | | | | |
| | | | | | | WINE/CHEESE - 2.700K 2.464 lm | 7 | | | | |
| | | | | | | BREAD - 2.400K 2.464 lm | 8 | | | | |
| | | | | | | MEAT M - 3.500K 1.628 lm | 9 | | | | |

Code: 3 9

*Create your code acording to your preferences.

Consult delivery terms and conditions.

### Accessories



Honeycomb anti-glare

● 40111

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 3.000K 4.000K | 15° 24° 36° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1



## Crown 3PH









## Technical Information

| | |
|---|---|
| Power | 25W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.300 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | | |
|---|---|---|
| | ○ | 5221 |
| | ● | 5222 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



## Alfa 3PH








## Technical Information

| | |
|---|---|
| Power | 32W |
| Installation | Three Phase Track |
| Color Temperature | 2.700K / 3.000K / 4.000K |
| Lumens | 3.100 lm / 3.200 lm / 3.250 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ☐ | 2.700K | 4038 |
| | ☐ | 3.000K | 4039 |
| | ☐ | 4.000K | 4040 |
| | ■ | 2.700K | 4176 |
| | ■ | 3.000K | 4177 |
| | ■ | 4.000K | 4178 |

CE RoHS

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -10°C | AKZO NOBEL | 1/10



## Lena 3PH



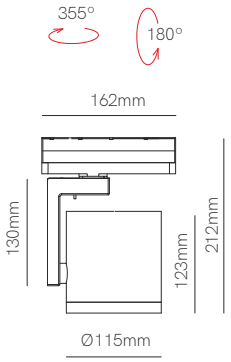




## Technical Information

| | |
|---|---|
| Power | 35W |
| Installation | Three Phase Track |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 4.200 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 4449-V2 |
| | ● 4450-V2 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8





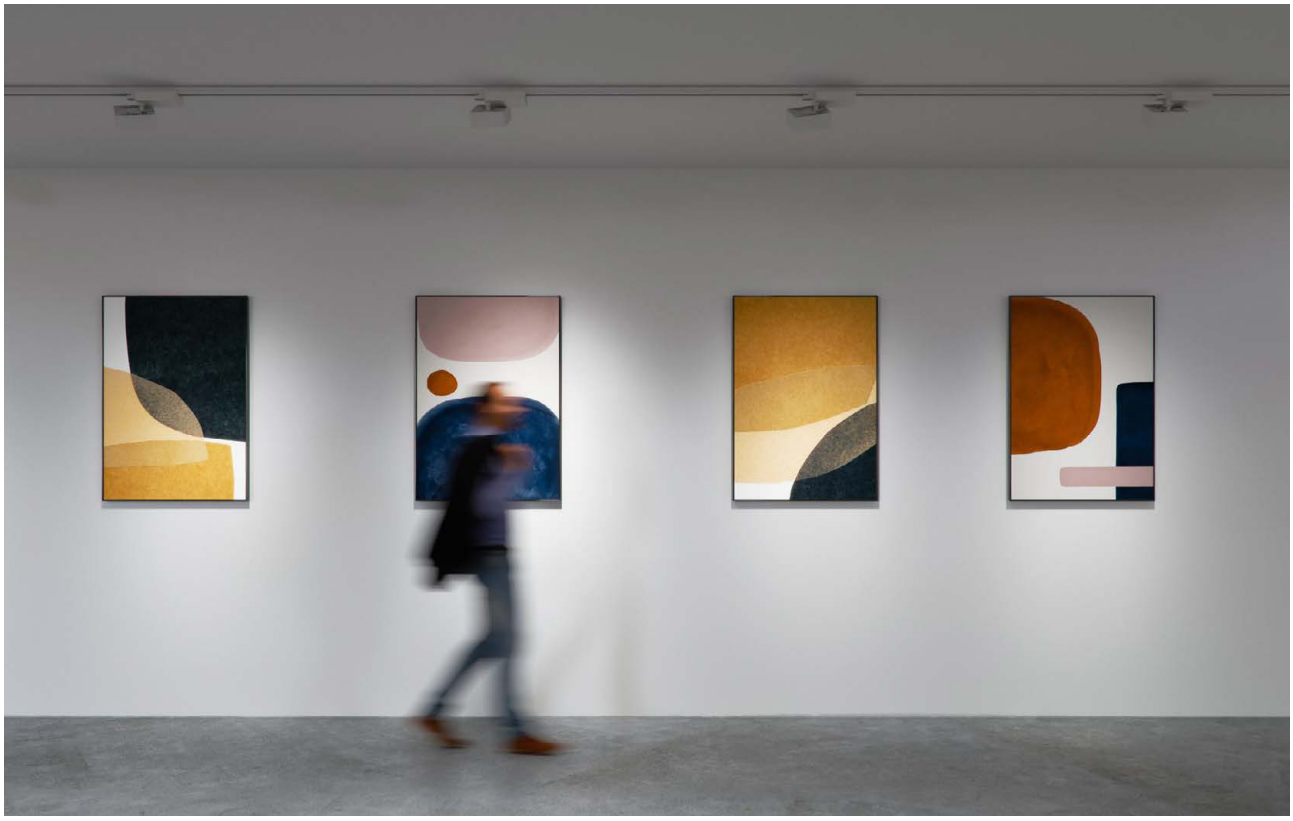

## Sono 3PH









## Sono XL 3PH









*Need Tuya Smart App to work.

## Technical Information

| | Sono 3PH | Sono XL 3PH |
|---|---|---|
| Power | 40W | 60W |
| Installation | Three Phase Track | Three Phase Track |
| Color Temperature | Tuya 2.600K - 4.000K | Tuya 2.600K - 4.000K |
| Lumens | 3.130 lm | 4.390 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 4946 | ☐ 4950 |
| | ■ 4947 | ■ 4951 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi
☐ 4956

CE RoHS

*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥98 | 30° | 50/60 Hz | IK06 | +45°C -15°C | tuya | 1/4



▶ VIDEO



# Magnet track mini

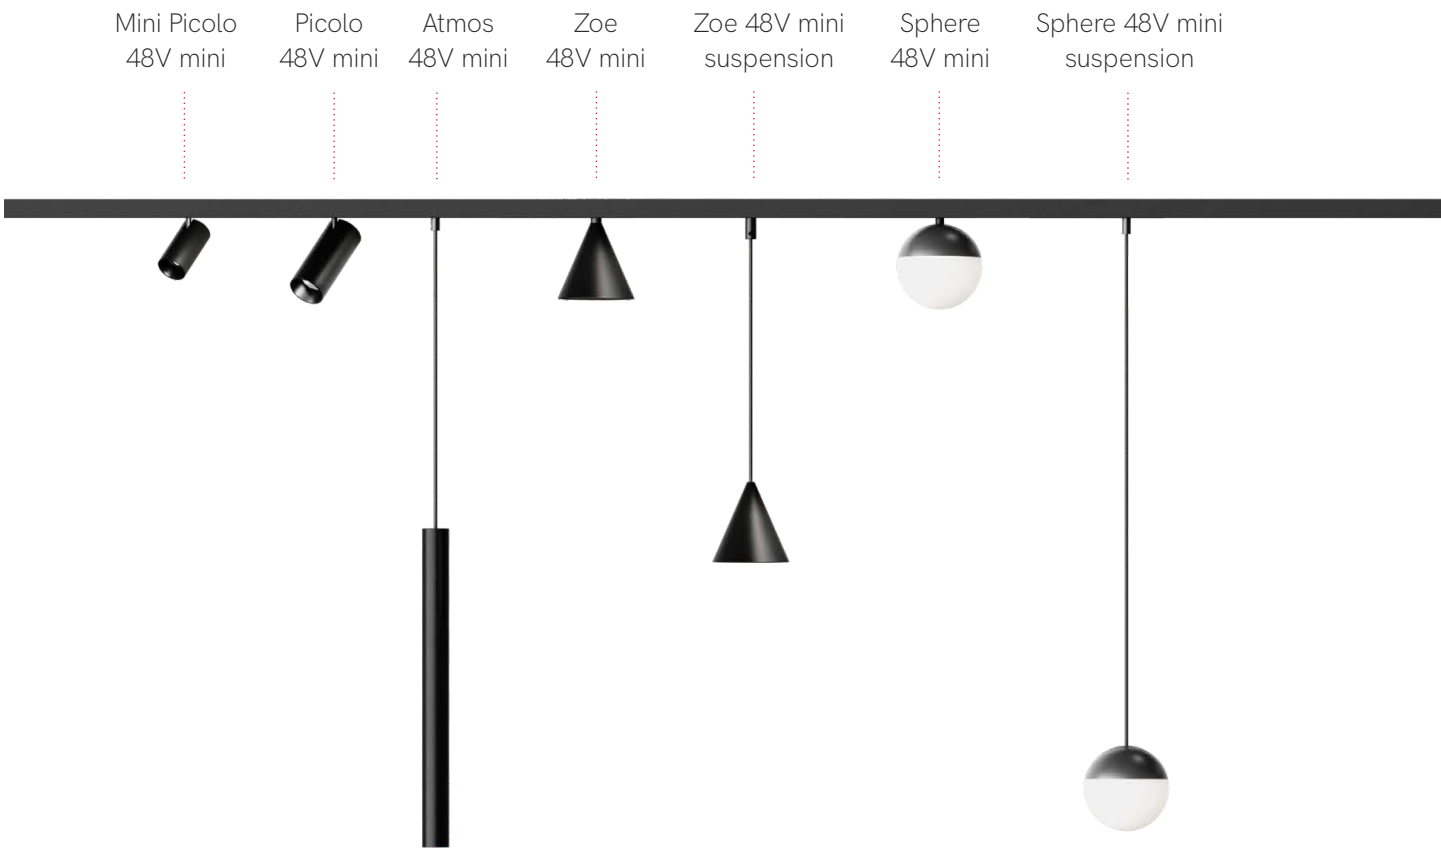


# Magnet track 48V mini

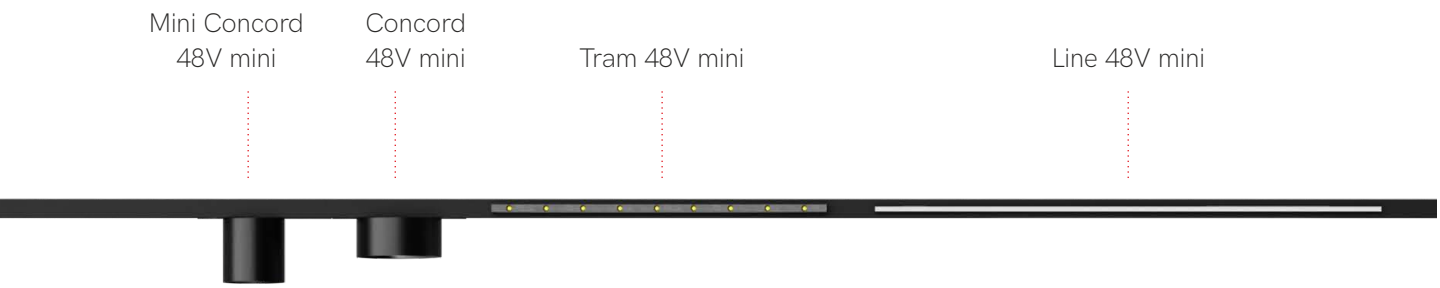




Beneito Faure introduces the new mini magnetic track, developed to offer a punctual and decorative lighting in interior rooms. Its small size design makes it an ideal solution for domestic and decorative environments that need to highlight specific elements without interfering with the design of the space. The new collection includes a wide variety of products that are integrated into the track and switch on by magnetization on contact, guaranteeing a focused light emission at short angles, ideal for projects that require maximum precision.

Beneito Faure presenta el nuevo carril magnético mini, desarrollado para ofrecer una iluminación puntual y decorativa en estancias interiores. Su diseño de tamaño reducido lo convierte en una solución idónea para entornos domésticos y decorativos que necesitan resaltar elementos específicos sin interferir en el diseño del espacio.
La nueva colección incluye una amplia variedad de productos que se integran en el carril y se encienden por imantación al contactarlo, garantizando una emisión de luz focalizada con ángulos cortos, ideal para proyectos que exigen máxima precisión.

# Magnet track mini accessories

☐ 5586
■ 5587
1.



☐ 5590
■ 5591
2.



☐ 5594
■ 5595
3.



☐ 5606
■ 5607
4.



☐ 5596
■ 5597
5.



☐ 5608
■ 5609
6.



☐ 5598
■ 5599
7.



☐ 5610
■ 5611
8.



☐ 5600
■ 5601
9.



☐ 5612
■ 5613
10.



☐ 5602
■ 5603
11.



☐ 5614
■ 5615
12.



☐ 5588
■ 5589
13.



☐ 5592
■ 5593
14.



☐ 5604
■ 5605
15.



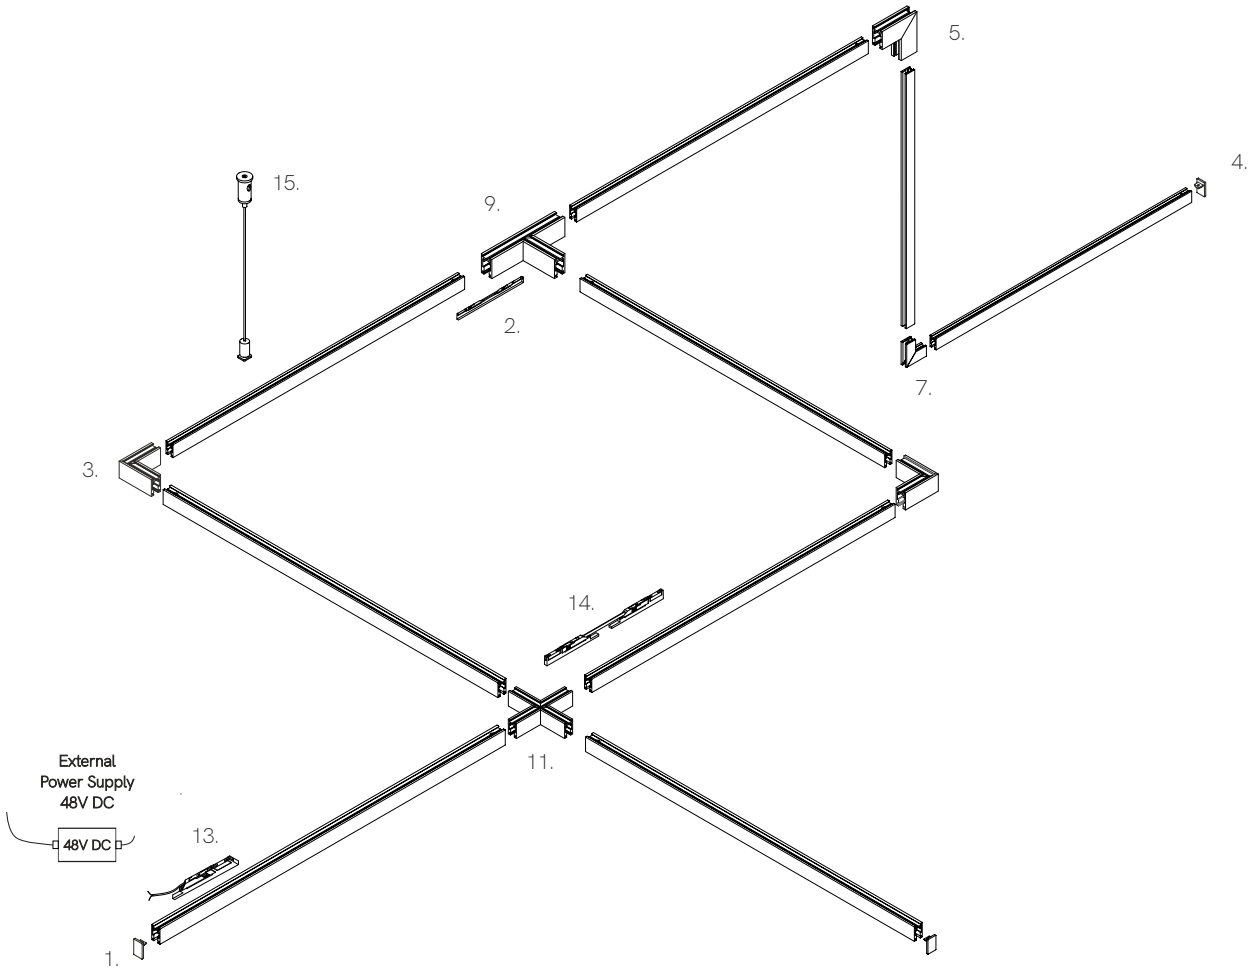


CE RoHS EMC

3 YEARS WARRANTY | IP 20 |



## Magnet track mini surface
W: 16mm H: 22mm

| | | |
|---|---|---|
| ☐ | 2m | 5578 |
| ☐ | 3m | 5579 |
| ■ | 2m | 5580 |
| ■ | 3m | 5581 |



## Magnet track mini recessed
W: 35mm x H: 16mm

| | | |
|---|---|---|
| ☐ | 2m | 5582 |
| ☐ | 3m | 5583 |
| ■ | 2m | 5584 |
| ■ | 3m | 5585 |



## L joint ceiling surface
L: 42mm W: 42mm H: 19mm

| | |
|---|---|
| ☐ | 5594 |
| ■ | 5595 |



## L joint ceiling recessed
L: 35mm W: 35mm H: 16mm

| | |
|---|---|
| ☐ | 5606 |
| ■ | 5607 |



## L joint wall ceiling outer surface
L: 42mm W: 42mm H: 12mm

| | |
|---|---|
| ☐ | 5596 |
| ■ | 5597 |



## L joint wall ceiling outer recessed
L: 42mm W: 35mm H: 42mm

| | |
|---|---|
| ☐ | 5608 |
| ■ | 5609 |



## L joint wall ceiling inner surface
L: 42mm W: 42mm H: 12mm

| | |
|---|---|
| ☐ | 5598 |
| ■ | 5599 |



## L joint wall ceiling inner recessed
L: 42mm W: 35mm H: 42mm

| | |
|---|---|
| ☐ | 5610 |
| ■ | 5611 |



## T joint ceiling surface
L: 84mm W: 48mm H: 19mm

| | |
|---|---|
| ☐ | 5600 |
| ■ | 5601 |



## T joint ceiling recessed
L: 84mm W: 52mm H: 16mm

| | |
|---|---|
| ☐ | 5612 |
| ■ | 5613 |



## X joint ceiling surface
L: 84mm W: 84mm H: 19mm

| | |
|---|---|
| ☐ | 5602 |
| ■ | 5603 |



## X joint ceiling recessed
L: 84mm W: 84mm H: 16mm

| | |
|---|---|
| ☐ | 5614 |
| ■ | 5615 |



## End cap surface / recessed
L: 10mm W: 11mm H: 17mm

| | |
|---|---|
| ☐ | 5586 |
| ■ | 5587 |



## Linear joint
L: 200mm W: 5mm H: 14mm

| | |
|---|---|
| ☐ | 5590 |
| ■ | 5591 |



## Start connector
L: 100mm W: 5mm H: 14mm

| | |
|---|---|
| ☐ | 5588 |
| ■ | 5589 |



## Suspension kit
L: 2.000mm W: 15mm

| | |
|---|---|
| ☐ | 5604 |
| ■ | 5605 |



## Central corner connector
L: 225mm W: 5mm H: 14mm

| | |
|---|---|
| ☐ | 5592 |
| ■ | 5593 |

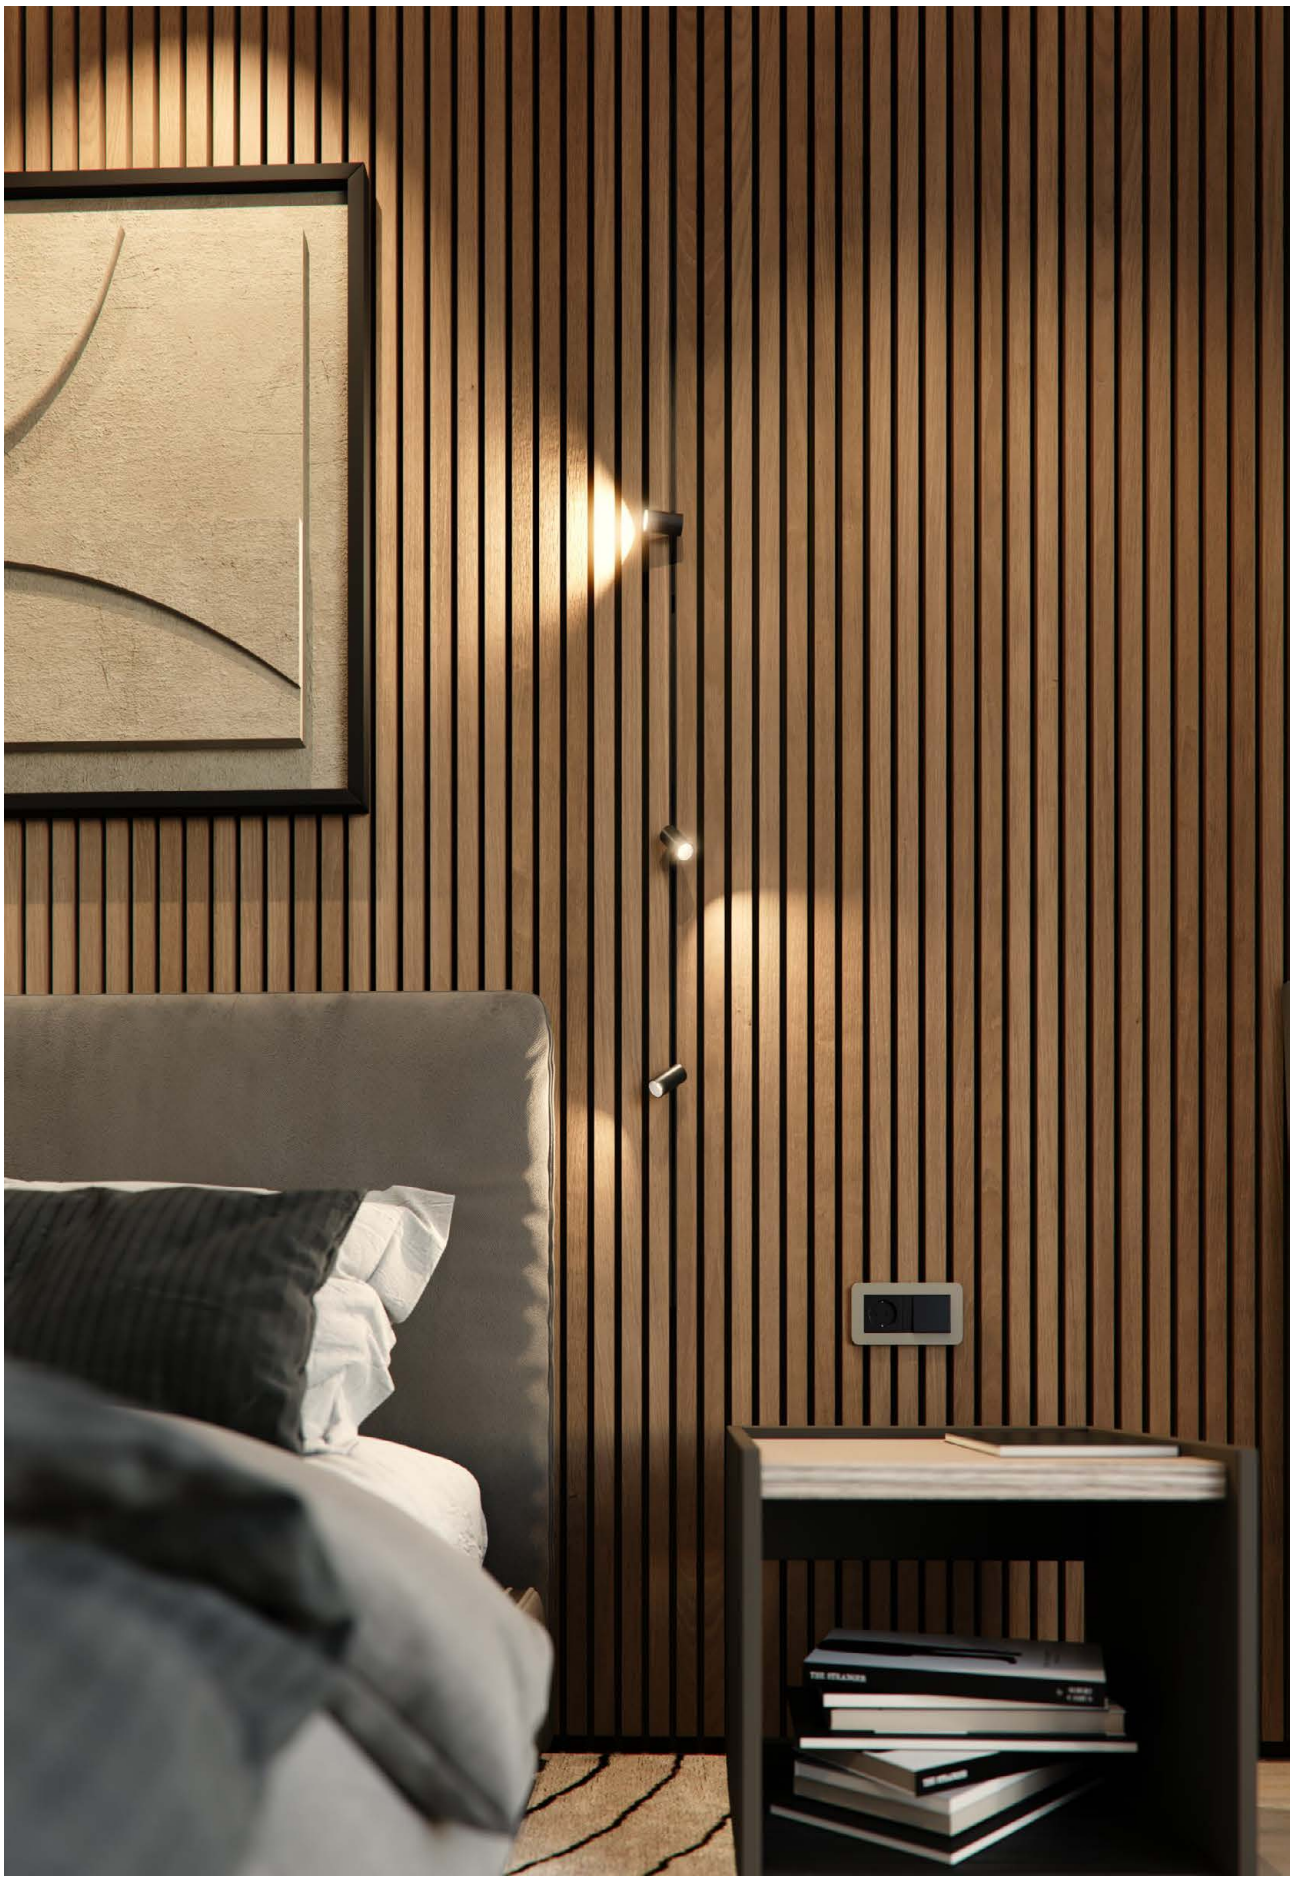

New

## Mini Picolo 48V mini






## Picolo 48V mini






*Need power supply (page 366).

## Technical Information

| | | |
|---|---|---|
| Power | 6W | 10W |
| Installation | Magnet track mini | Magnet track mini |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 380 lm / 415 lm | 440 lm / 475 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5628 | ○ | 2.700K | 5632 |
| | ○ | 3.000K | 5629 | ○ | 3.000K | 5633 |
| | ● | 2.700K | 5630 | ● | 2.700K | 5634 |
| | ● | 3.000K | 5631 | ● | 3.000K | 5635 |
| | | | 1/48 | | | 1/36 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C



New

## Atmos slim 48V mini



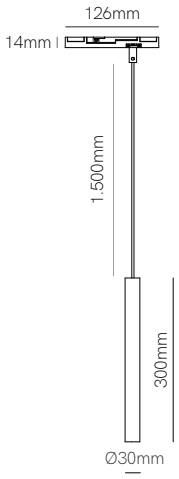


*Need power supply (page 366).



## Technical Information

| | |
|---|---|
| Power | 6W |
| Installation | Magnet track mini |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 380 lm / 415 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 5636 |
| | ○ | 3.000K | 5637 |
| | ● | 2.700K | 5638 |
| | ● | 3.000K | 5639 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C | 1/24



New

## Zoe 48V mini






## Zoe 48V mini suspension



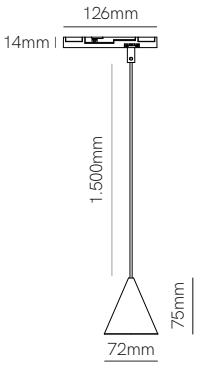


*Need power supply (page 366).

### Technical Information

| | Zoe 48V mini | Zoe 48V mini suspension |
|---|---|---|
| Power | 6W | 6W |
| Installation | Magnet track mini | Magnet track mini |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 375 lm / 410 lm | 375 lm / 410 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5644 | ○ | 2.700K | 5640 |
| | ○ | 3.000K | 5645 | ○ | 3.000K | 5641 |
| | ● | 2.700K | 5646 | ● | 2.700K | 5642 |
| | ● | 3.000K | 5647 | ● | 3.000K | 5643 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 36° | +40°C -20°C | 1/36



New

## Sphere 48V mini






## Sphere 48V mini suspension

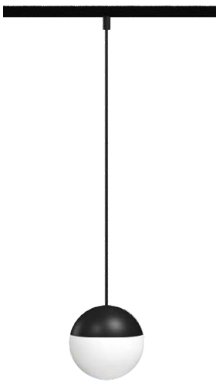

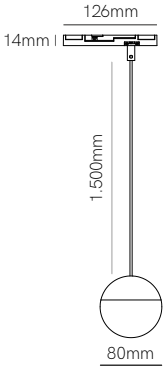


*Need power supply (page 366).

### Technical Information

| | | |
|---|---|---|
| Power | 7W | 7W |
| Installation | Magnet track mini | Magnet track mini |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 380 lm / 415 lm | 380 lm / 415 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5660 | ○ | 2.700K | 5656 |
| | ○ | 3.000K | 5661 | ○ | 3.000K | 5657 |
| | ● | 2.700K | 5662 | ● | 2.700K | 5658 |
| | ● | 3.000K | 5663 | ● | 3.000K | 5659 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C | 1/36


Locker
Room

New

## Mini Concord 48V mini






## Concord 48V mini






*Need power supply (page 366).

## Technical Information

| | Mini Concord 48V mini | Concord 48V mini |
|---|---|---|
| Power | 8W | 10W |
| Installation | Magnet track mini | Magnet track mini |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 290 lm / 315 lm | 490 lm / 530 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | |
|---|---|---|---|---|---|
| | ○ | 2.700K | 5652 | ○ 2.700K | 5648 |
| | ○ | 3.000K | 5653 | ○ 3.000K | 5649 |
| | ● | 2.700K | 5654 | ● 2.700K | 5650 |
| | ● | 3.000K | 5655 | ● 3.000K | 5651 |
| | | | 1/36 | | 1/24 |

## Accessories



Honeycomb anti-glare
(Included)

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 36° | +40°C -20°C


the princess saves herself
INTERNATIONAL LAW
Alexandra & Michael Misczynski
PHOTOGRAPHS BY FRANÇOIS HALARD
the witch doesn't burn
THE LAW OF NATIONS
JAMES JOYCE
WIVES AND DAUGHTERS
THE MOUNTAIN IS YOU

New

## Tram 48V mini

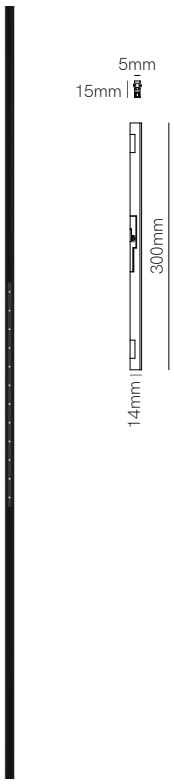


## Mini Line 48V mini

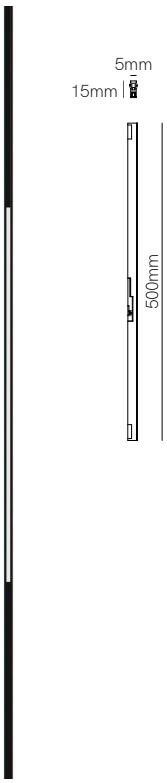


## Line 48V mini

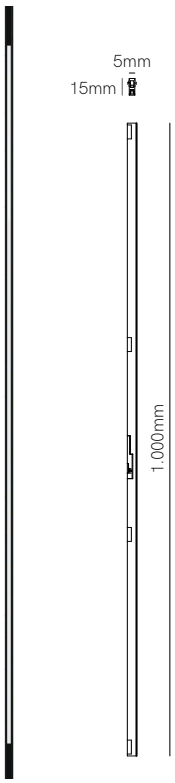


Tram 48V mini

Line 48V mini

*Need power supply (page 366).

## Technical Information

| | Tram 48V mini | Mini Line 48V mini | Line 48V mini |
|---|---|---|---|
| Power | 8W | 8W | 16W |
| Installation | Magnet track mini | Magnet track mini | Magnet track mini |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 545 lm / 605 lm | 300 lm / 325 lm | 600 lm / 650 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5624 | ○ | 2.700K | 5616 | ○ | 2.700K | 5620 |
| | ○ | 3.000K | 5625 | ○ | 3.000K | 5617 | ○ | 3.000K | 5621 |
| | ● | 2.700K | 5626 | ● | 2.700K | 5618 | ● | 2.700K | 5622 |
| | ● | 3.000K | 5627 | ● | 3.000K | 5619 | ● | 3.000K | 5623 |
| | 65° | | 1/60 | | | | 100° | | 1/36 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C





# Magnet track

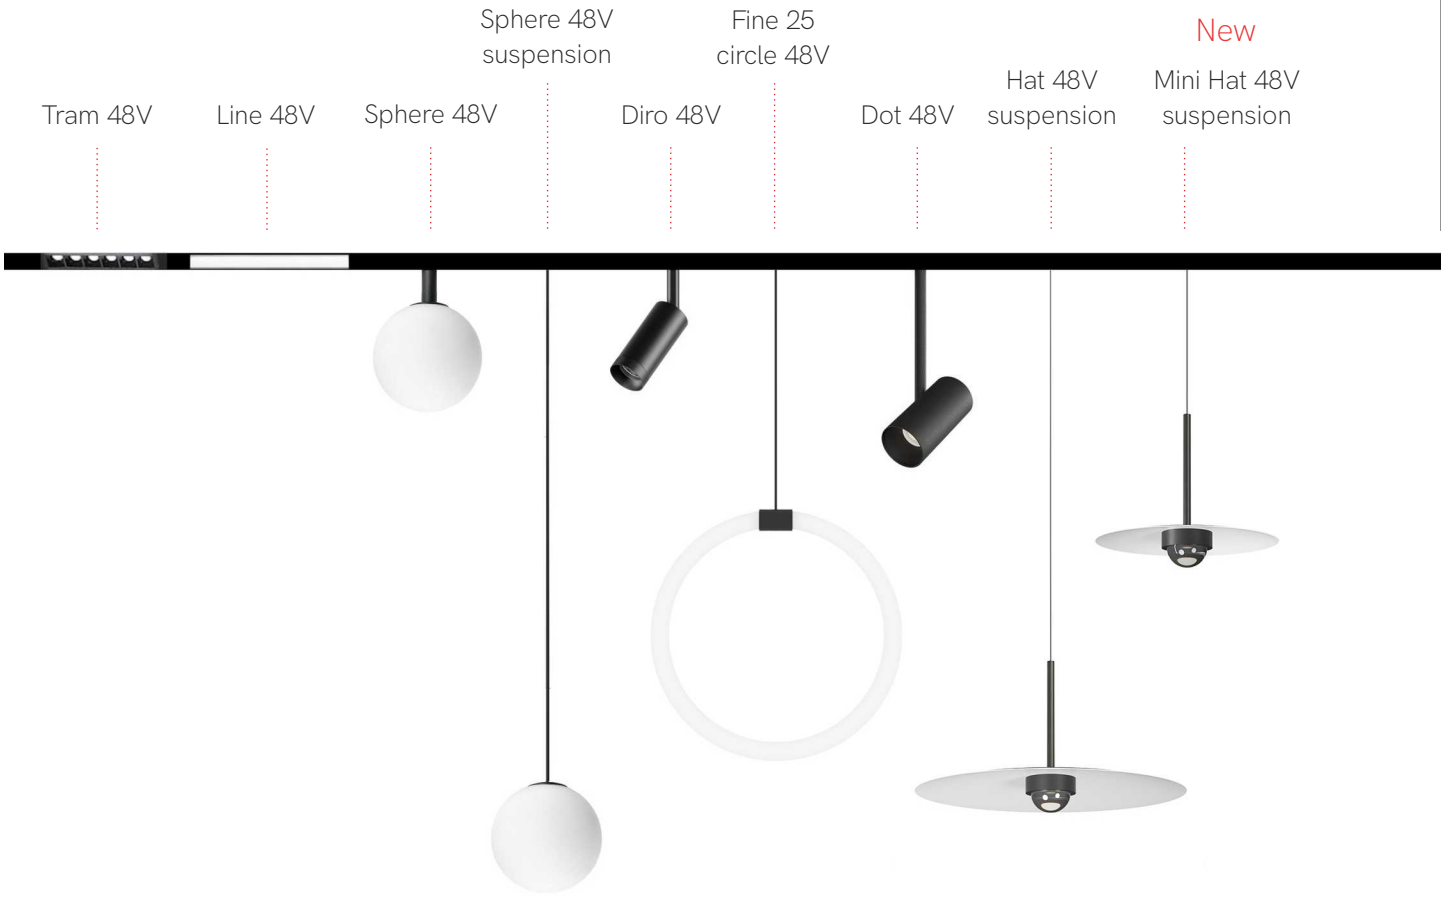


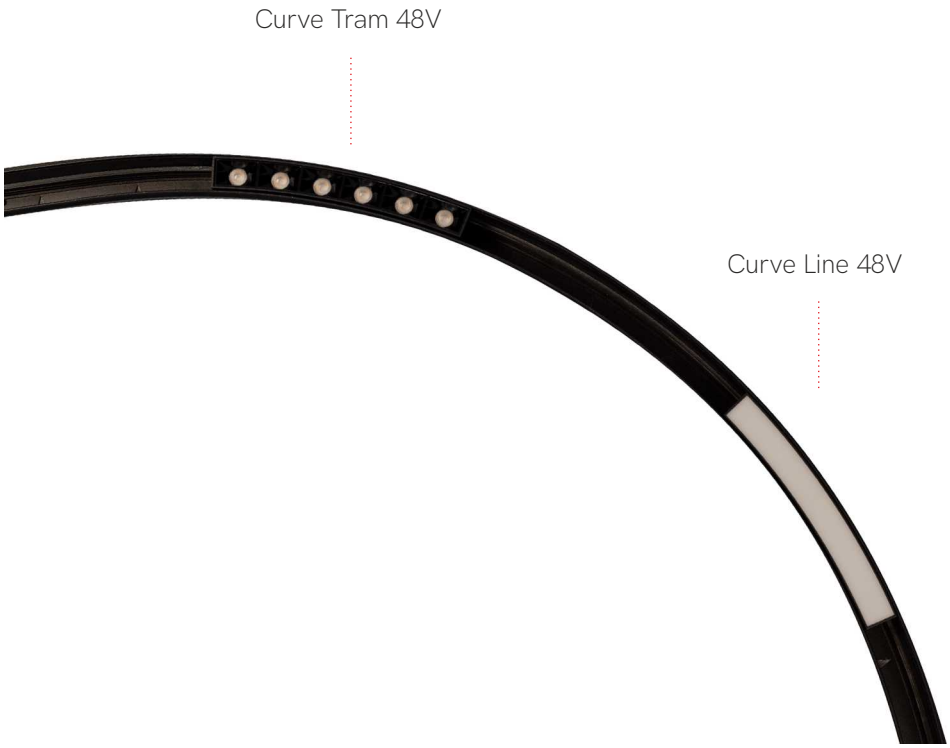


Magnet track 48V






# Magnet track 48V

Beneito Faure expands the collection for magnetic track and incorporates the mini Hat, a current trend in decorative lighting.
Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora mini Hat, tendencia actual en iluminación decorativa.
Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.

# Magnet track accessories

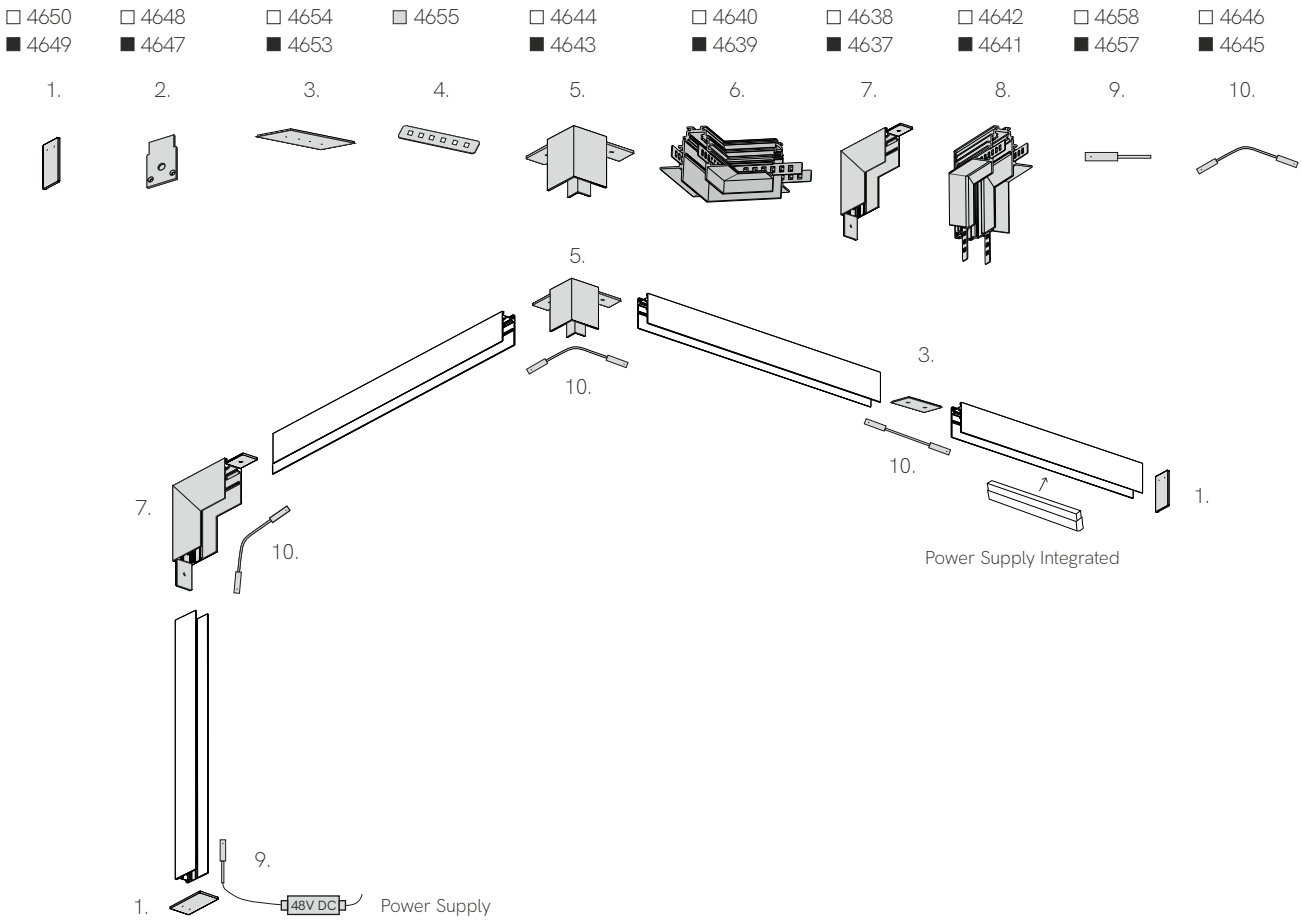


CE RoHS EAC

3 YEARS WARRANTY | IP 20 | III

# Power Supplies 48V

| Code | | Version | Power | IP | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 4711 | ■ | Power Supply Basic | 60W | IP67 | 48 VDC | 150x53x36mm |
| 4707-N | ☐ New | Power Supply Basic | 150W | IP20 | 48 VDC | 227x38x30mm |
| 4707 | ☐ | Power Supply Top | 150W | IP65 | 48 VDC | 219x63x35mm |
| 4708 | ☐ | Power Supply Top | 240W | IP65 | 48 VDC | 244x71x37mm |
| 5139 | ☐ | Power Supply Dali | 90W | IP67 | 48 VDC | 171x63x38mm |
| 5140 | ☐ | Power Supply Dali | 200W | IP67 | 48 VDC | 191x68x40mm |
| 5558 | ☐ New | Power Supply Integrated | 100W | IP20 | 48 VDC | 325x23x23mm |
| 6023 | ■ | Power Supply Integrated | 100W | IP20 | 48 VDC | 325x23x23mm |
| 5559 | ☐ New | Power Supply Integrated | 250W | IP20 | 48 VDC | 390x23x43mm |
| 6025 | ■ | Power Supply Integrated | 250W | IP20 | 48 VDC | 390x23x43mm |

5 YEARS WARRANTY | Basic Dali Integrated | Top | PF >0,9



## Magnet track 48V surface

W: 26mm H: 53mm

| | | |
|---|---|---|
| ☐ | 1m | 4660 |
| ☐ | 2m | 4662 |
| ■ | 1m | 4659 |
| ■ | 2m | 4661 |



## Magnet track 48V recessed

W: 72mm x H: 55mm

| | | |
|---|---|---|
| ☐ | 1m | 4664 |
| ☐ | 2m | 4666 |
| ■ | 1m | 4663 |
| ■ | 2m | 4665 |




## End cap 48V surface

L: 53mm W: 26.6mm H: 2mm

| | |
|---|---|
| ☐ | 4650 |
| ■ | 4649 |




## End cap 48V recessed

L: 52mm W: 32mm H: 2mm

| | |
|---|---|
| ☐ | 4648 |
| ■ | 4647 |




## L joint wall 48V ceiling surface

L: 100mm W: 100mm H: 26mm

| | |
|---|---|
| ☐ | 4638 |
| ■ | 4637 |




## L joint wall 48V ceiling recessed

L: 100mm W: 100mm H: 72mm

| | |
|---|---|
| ☐ | 4642 |
| ■ | 4641 |




## L joint 48V ceiling surface

L: 40mm W: 40mm H: 53mm

| | |
|---|---|
| ☐ | 4644 |
| ■ | 4643 |




## L joint 48V ceiling recessed

L: 100mm W: 100mm H: 55mm

| | |
|---|---|
| ☐ | 4640 |
| ■ | 4639 |



## Curve magnet track 48V surface

W: 26mm H: 53mm

| | | |
|---|---|---|
| ○ | R500 1/4 | 5317 |
| ● | R500 1/4 | 5319 |



## Curve/straight end cap 48V

L: 53mm W: 26.6mm H: 2mm

| | |
|---|---|
| ☐ | 4650-N |
| ■ | 4649-N |



## Linear joint 48V surface

L: 80mm W: 22.5mm H: 2mm

| | |
|---|---|
| ☐ | 4654 |
| ■ | 4653 |




## Linear joint 48V recessed

L: 70mm W: 11.5mm H: 1mm

| | |
|---|---|
| ▩ | 4655 |



## Start connector 48V

L: 98mm W: 18mm H: 18mm

| | |
|---|---|
| ☐ | 4658 |
| ■ | 4657 |



## Central corner connector 48V

L: 98mm W: 18mm H: 18mm

| | |
|---|---|
| ☐ | 4646 |
| ■ | 4645 |



## PVC trim 48V

W: 26.8mm H: 3.5mm

| | | |
|---|---|---|
| ■ | 1m | 4651 |
| ■ | 2m | 4652 |



## Suspension kit 48V

L: 45mm W: 22mm | Ø15mm H: 1.900mm

| | |
|---|---|
| ■ | 4807 |

Surface Recessed Common


Grupo
Oficines La Roca 2
Editar
Mesa billar
Christian
Maribel
Sala Fotos
Carles
Nuria
Iñigo
Dani
Sala video
Mesa sala negra
Cristina
María P
Regulador
60.8 %
Temperatura de color
3000 K

# Casambi magnet track control

CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.

Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.

Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.

CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi.
Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.






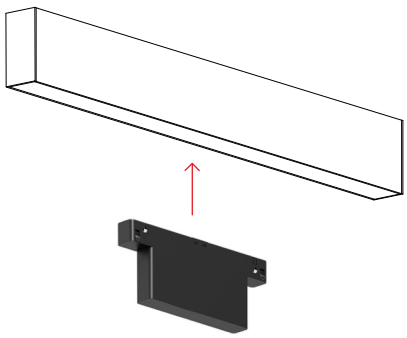

| Code | Version | Power | IP | VDC OUT | Size |
|---|---|---|---|---|---|
| ☐ 6721 | Casambi control 48V | 8W | IP20 | 24-48 VDC | 142x58x18mm |
| ■ 6722 | Casambi control 48V | 8W | IP20 | 24-48 VDC | 142x58x18mm |

CE RoHS

3 YEARS WARRANTY | 24-48V DC | +40°C -20°C | 1



## Alp 48V






## Alp 48V suspension






*Need power supply (page 366).

## Technical Information

| | Alp 48V | Alp 48V suspension |
|---|---|---|
| Power | 4,5W | 4,5W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 260 lm / 270 lm | 260 lm / 270 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 4787 | ○ | 2.700K | 4791 |
| | ○ | 3.000K | 4788 | ○ | 3.000K | 4792 |
| | ● | 2.700K | 4789 | ● | 2.700K | 4793 |
| | ● | 3.000K | 4790 | ● | 3.000K | 4794 |
| | ⓘ | Custom RAL | | ⓘ | Custom RAL | |
| | | 1/20 | | | 1/25 | |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C



## Mini Bora 48V






## Bora 48V suspension






*Need power supply (page 366).

## Technical Information

| | Mini Bora 48V | Bora 48V suspension |
|---|---|---|
| Power | 4,5W | 8,5W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 315 lm / 325 lm | 610 lm / 620 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 4581 | ○ | 2.700K | 4573 |
| | ○ | 3.000K | 4582 | ○ | 3.000K | 4574 |
| | ● | 2.700K | 4583 | ● | 2.700K | 4575 |
| | ● | 3.000K | 4584 | ● | 3.000K | 4576 |
| | ● | 2.700K | 4585 | ● | 2.700K | 4577 |
| | ● | 3.000K | 4586 | ● | 3.000K | 4578 |
| | ● | 2.700K | 4587 | ● | 2.700K | 4579 |
| | ● | 3.000K | 4588 | ● | 3.000K | 4580 |
| | UGR <10 \| 38° | | | UGR <15 \| 36° | | |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | CRI ≥93 | +40°C -20°C | 1/18


▶ VIDEO

## Nano Tram 48V






## Mini Tram 48V






## Curve Tram 48V






*Need power supply (page 366).

## Technical Information

| | Nano Tram 48V | Mini Tram 48V | Curve Tram 48V |
|---|---|---|---|
| Power | 4,5W | 9W | 6W |
| Installation | Magnet Track | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 300 lm / 310 lm | 690 lm / 710 lm | 500 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | Nano Tram 48V | | Mini Tram 48V | | Curve Tram 48V | |
|---|---|---|---|---|---|---|
| | ☐ 2.700K | 4776 | ☐ 2.700K | 4780 | ○ 2.700K | 5309 |
| | ☐ 3.000K | 4777 | ☐ 3.000K | 4781 | ○ 3.000K | 5310 |
| | ■ 2.700K | 4778 | ■ 2.700K | 4782 | ● 2.700K | 5311 |
| | ■ 3.000K | 4779 | ■ 2.700K | 4783 | ● 3.000K | 5312 |
| | 26.000 HOURS \| 24° \| 1/50 | | 26.000 HOURS \| 24° \| 1/50 | | 30.000 HOURS \| 36° \| 1/40 | |

CE RoHS EMC

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | +40°C -20°C



## Nano Line 48V






## Mini Line 48V






## Line 48V






## Curve Line 48V






*Need power supply (page 366).

## Technical Information

| | Nano Line 48V | Mini Line 48V | Line 48V | Curve Line 48V |
|---|---|---|---|---|
| Power | 7,5W | 15W | 30W | 8W |
| Installation | Magnet Track | Magnet Track | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 310 lm / 320 lm | 740 lm / 760 lm | 1.000 lm / 1.050 lm | 300 lm |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black | White / Black |

| Code | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | ■ | 2.700K | 5202 | ■ | 2.700K | 5203 | ■ | 2.700K | 5204 | ○ | 2.700K | 5313 |
| | ■ | 3.000K | 4784 | ■ | 3.000K | 4785 | ■ | 3.000K | 4786 | ○ | 3.000K | 5314 |
| | | | | | | | | | | ● | 2.700K | 5315 |
| | | | | | | | | | | ● | 3.000K | 5316 |
| | 26.000 HOURS \| 1/25 | | | 26.000 HOURS \| 1/25 | | | 26.000 HOURS \| 1/20 | | | 30.000 HOURS \| 1/40 | | |

CE RoHS

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C -20°C



## Diro 48V






*Need power supply (page 366).

Casambi magnet track control (page 369).

### Technical Information

| | |
|---|---|
| Power | 7W |
| Installation | Magnet Track |
| Color Temperature | Dali 2.700K - 6.500K |
| Lumens | 420 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 5239 |
| | ● 5238 |

### Accessories



Honeycomb anti-glare
(Included)

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 48V DC | UGR <10 | CRI ≥90 | 36° | +40°C -20°C | DALI 2 | 1/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.

## Zoe 48V suspension






*Need power supply (page 366).

### Technical Information

| | |
|---|---|
| Power | 7W |
| Installation | Magnet Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 360 lm / 370 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | △ | 2.700K | 4795 |
| | △ | 3.000K | 4796 |
| | ▲ | 2.700K | 4797 |
| | ▲ | 3.000K | 4798 |
| ⓘ | | Custom RAL | |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | III | 38° | +40°C -20°C | 1/36



New

## Mini Hat 48V suspension



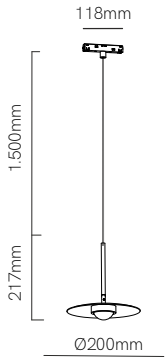


## Hat 48V suspension



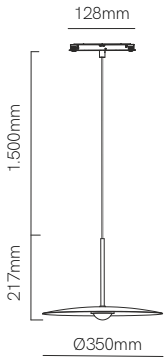


*Need power supply (page 366).

## Technical Information

| | Mini Hat 48V suspension | Hat 48V suspension |
|---|---|---|
| Power | 8W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 800 lm | 800 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5714 | ○ | 2.700K | 5363 |
| | ○ | 3.000K | 5716 | ○ | 3.000K | 5364 |
| | ● | 2.700K | 5715 | ● | 2.700K | 5366 |
| | ● | 3.000K | 5717 | ● | 3.000K | 5367 |
| | 70° | | 1/10 | 83° | | 1/5 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | +40°C -20°C



## Sphere 48V






## Sphere 48V suspension






*Need power supply (page 366).

## Technical Information

| | | |
|---|---|---|
| Power | 8W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 255 lm | 255 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5369 | ○ | 2.700K | 5375 |
| | ○ | 3.000K | 5370 | ○ | 3.000K | 5376 |
| | ● | 2.700K | 5372 | ● | 2.700K | 5378 |
| | ● | 3.000K | 5373 | ● | 3.000K | 5379 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 360° | +40°C -20°C | 1/12



## Volt r 48V






## Volt sq 48V






*Need power supply (page 366).

Casambi magnet track control (page 369).

## Technical Information

| | Volt r 48V | Volt sq 48V |
|---|---|---|
| Power | 8W | 8W |
| Installation | Magnet Track | Magnet Track |
| Color Temperature | Dali 2.700K - 4.000K | Dali 2.700K - 4.000K |
| Lumens | 570 lm | 570 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ○ 5037 | □ 5039 |
| | ● 5038 | ■ 5040 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EAC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 38° | IK06 | +45°C -20°C | DALI 2 | 1/20


To Kill a Mockingbird
To Kill a Mockingbird
To Kill a Mockingbird

## Dot 48V






*Need power supply (page 366).

### Technical Information

| | |
|---|---|
| Power | 11W |
| Installation | Magnet Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 680 lm / 690 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 4768 |
| | ○ | 3.000K | 4769 |
| | ● | 2.700K | 4770 |
| | ● | 3.000K | 4771 |
| ⓘ | | Custom RAL | |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 35° | +40°C -20°C | 1/20



## Cookie 48V






## Cookie 48V






## Cookie 48V suspension

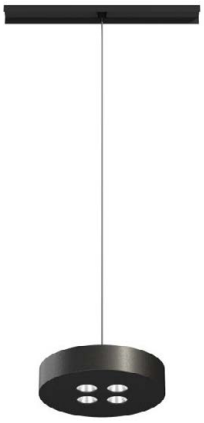




*Need power supply (page 366).

Casambi magnet track control (page 369).

### Technical Information

| | | | |
|---|---|---|---|
| Power | 12W | 12W | 12W |
| Installation | Magnet Track | Magnet Track | Magnet Track |
| Color Temperature | 2.700K / 3.000K | Dali 2.700K - 4.000K | Dali 2.700K - 4.000K |
| Lumens | 940 lm / 950 lm | 500 lm - 700 lm | 500 lm - 700 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | |
|---|---|---|---|---|
| | ○ | 2.700K | 4772 | |
| | ○ | 3.000K | 4773 | |
| | ● | 2.700K | 4774 | |
| | ⓘ | Custom RAL | | |
| | | 26.000 HOURS | | |
| | ○ | | 5181 | |
| | ● | | 5182 | |
| | ⓘ | | Custom RAL | |
| | | | 30.000 HOURS \| DALI 2 | |
| | ○ | | | 5185 |
| | ● | | | 5186 |
| | ⓘ | | | Custom RAL |
| | | | | 30.000 HOURS \| DALI 2 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C -20°C | 1/20



## Fine 25 circle 48V

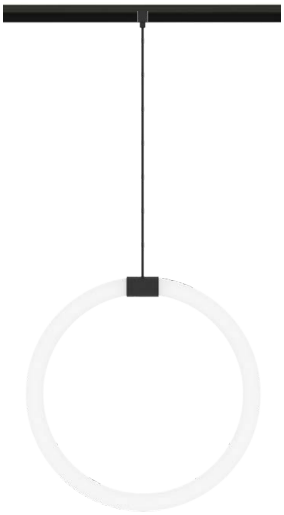




*Need power supply (page 366).

### Technical Information

| | |
|---|---|
| Power | 19W |
| Installation | Magnet Track |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 850 lm / 950 lm |
| Finishes | Aluminium / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 3.000K | 5431 |
| | ○ | 4.000K | 5441 |
| | ● | 3.000K | 5432 |
| | ● | 4.000K | 5442 |

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 48V DC | CRI ≥90 | 360° | +40°C -20°C | 1



# Outdoor track













# Outdoor track accessories



### Outdoor Track IP
W: 26mm H: 25mm

| | | |
|---|---|---|
| ☐ | 5406 | 1m |
| ☐ | 5407 | 2m |
| ☐ | 5408 | 3m |
| ■ | 5409 | 1m |
| ■ | 5410 | 2m |
| ■ | 5411 | 3m |



### L joint ceiling IP
L: 70mm W: 70mm H: 26mm

| | | |
|---|---|---|
| ☐ | 5412 | |
| ■ | 5413 | |



### L joint wall ceiling IP
L: 70mm W: 70mm H: 30mm

| | | |
|---|---|---|
| ☐ | 5425 | |
| ■ | 5426 | |



### Linear joint IP
L: 100mm W: 30mm H: 26mm

| | | |
|---|---|---|
| ☐ | 5414 | |
| ■ | 5415 | |



### End cap IP
L: 62mm W: 30mm H: 26mm

| | | |
|---|---|---|
| ☐ | 5416 | |
| ■ | 5417 | |



### Waterproof silicone cover IP
L: 20mm W: 14mm H: 4mm

| | | |
|---|---|---|
| ☐ | 5418 | |

CE RoHS

3 YEARS WARRANTY | IK06 |



# Power Supplies 48V

| Code | | Version | Power | IP | VDC OUT | Size |
|---|---|---|---|---|---|---|
| 4711 | ■ | Power Supply Basic | 60W | IP67 | 48 VDC | 150x53x36mm |
| 4707 | ☐ | Power Supply Top | 150W | IP65 | 48 VDC | 219x63x35mm |
| 4708 | ☐ | Power Supply Top | 240W | IP65 | 48 VDC | 244x71x37mm |

5 YEARS WARRANTY | Basic | Top | PF >0,9



## Frame 48V IP 1m






## Frame 48V IP 2m






## Frame 48V IP 3m






*Need power supply (page 397).

## Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 20W | 30W |
| Installation | Outdoor Track | Outdoor Track | Outdoor Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 680 lm | 1.400 lm | 2.055 lm |
| Material | Silicone | Silicone | Silicone |

| | | | |
|---|---|---|---|
| Code | ☐ 2.700K 5400 | ☐ 2.700K 5402 | ☐ 2.700K 5404 |
| | ☐ 3.000K 5401 | ☐ 3.000K 5403 | ☐ 3.000K 5405 |

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | CRI ≥90 | 100° | 125mm | IK06 | +45°C -20°C | 1/15



## Atmos slim 48V IP

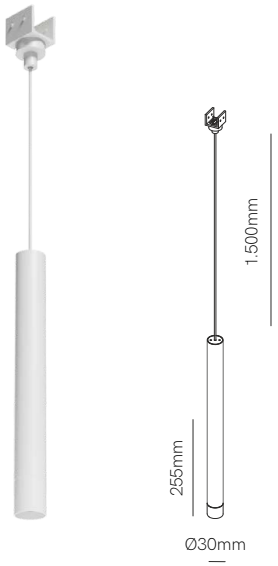




*Need power supply (page 397).

### Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Outdoor Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 510 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 5392 |
| | ○ | 3.000K | 5393 |
| | ● | 2.700K | 5394 |
| | ● | 3.000K | 5395 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 38° | IK06 | +45°C -20°C | 1/20



## Bit 48V IP






*Need power supply (page 397).

### Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Outdoor Track |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 630 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 5396 |
| | ○ | 3.000K | 5397 |
| | ● | 2.700K | 5398 |
| | ● | 3.000K | 5399 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | 55° | IK06 | +45°C -20°C | 1/20



## Ice 48V IP






## Ice XL 48V IP






*Need power supply (page 397).

### Technical Information

| | Ice 48V IP | Ice XL 48V IP |
|---|---|---|
| Power | 10W | 20W |
| Installation | Outdoor Track | Outdoor Track |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 685 lm | 1.110 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 2.700K | 5384 | ☐ | 2.700K | 5388 |
| | ☐ | 3.000K | 5385 | ☐ | 3.000K | 5389 |
| | ■ | 2.700K | 5386 | ■ | 2.700K | 5390 |
| | ■ | 3.000K | 5387 | ■ | 3.000K | 5391 |
| | | | 1/40 | | | 1/20 |

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 48V DC | UGR <19 | CRI ≥90 | III | 45° | IK06 | +45°C -20°C




Recessed


SANTAL 33

## Nano Argo flat reccesed









## Argo recessed









## Argo XL recessed









## Technical Information

| | Nano Argo flat reccesed | Argo recessed | Argo XL recessed |
|---|---|---|---|
| Power | 2W | 3,5W | 3,5W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 80 lm | 125 lm | 125 lm |
| Material | Aluminium and acrylic | Aluminium and acrylic | Aluminium and acrylic |
| Finishes | White / Black | White / Black | White / Black |

| Code | Nano Argo flat reccesed | Argo recessed | Argo XL recessed |
|---|---|---|---|
| ○ 2.700K | 5258 | 5246 | 5252 |
| ○ 3.000K | 5259 | 5247 | 5253 |
| ○ 4.000K | 5260 | 5248 | 5254 |
| ● 2.700K | 5261 | 5249 | 5255 |
| ● 3.000K | 5262 | 5250 | 5256 |
| ● 4.000K | 5263 | 5251 | 5257 |

CE RoHS EMC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C -20°C | 1/100


WATCHES

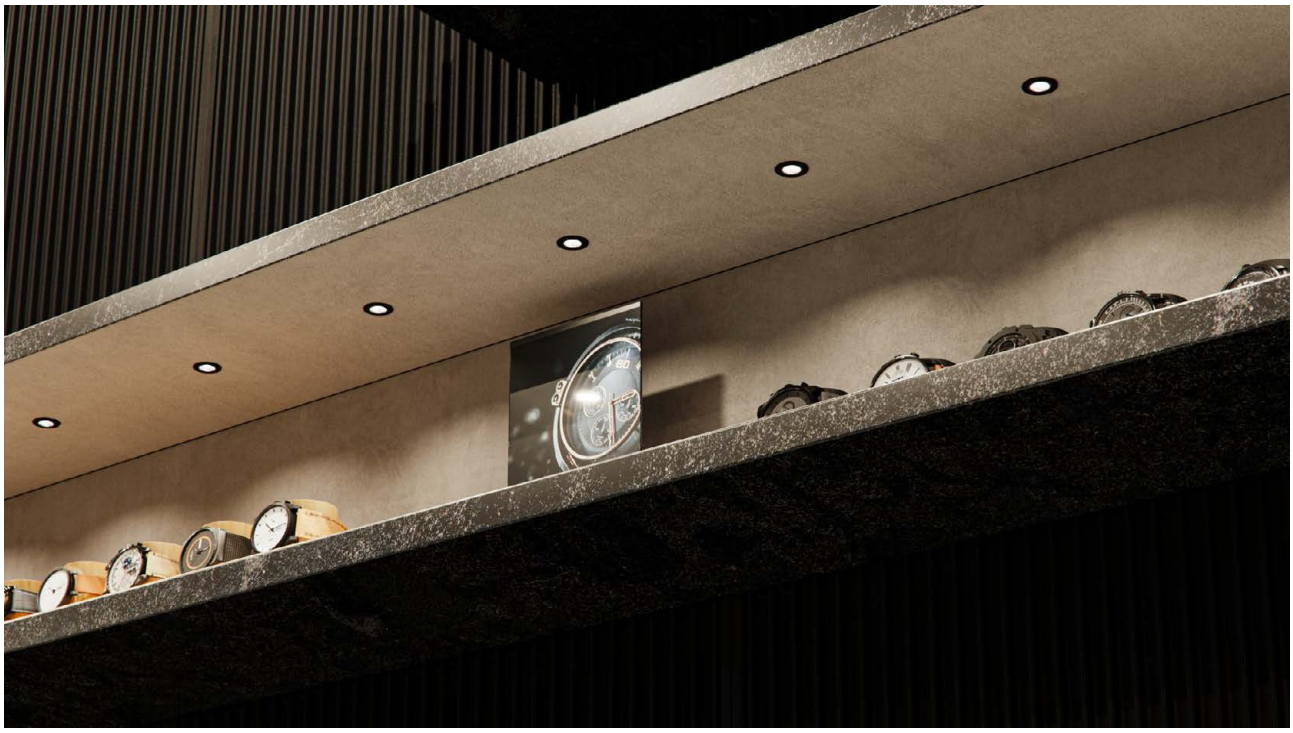

## Atom recessed











### Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K |
| Lumens | 90 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 5267 |
| | ○ | 3.000K | 5268 |
| | ○ | 4.000K | 5269 |
| | ● | 2.700K | 5270 |
| | ● | 3.000K | 5271 |
| | ● | 4.000K | 5272 |

CE RoHS

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/100


▶ VIDEO

## Micro Zoom recessed



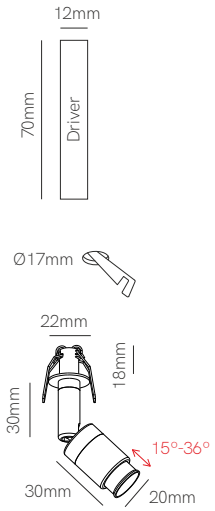


## Micro Zoom XL recessed



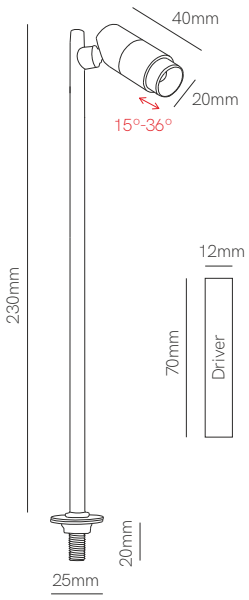


RECESSED

## Technical Information

| | Micro Zoom recessed | Micro Zoom XL recessed |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 70 lm | 70 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5273 | ○ | 2.700K | 5279 |
| | ○ | 3.000K | 5274 | ○ | 3.000K | 5280 |
| | ○ | 4.000K | 5275 | ○ | 4.000K | 5281 |
| | ● | 2.700K | 5276 | ● | 2.700K | 5282 |
| | ● | 3.000K | 5277 | ● | 3.000K | 5283 |
| | ● | 4.000K | 5278 | ● | 4.000K | 5284 |
| | | | 1/100 | | | 1/50 |

CE RoHS EMC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C -20°C



Ribera Manero, seafood restaurant, Barcelona (Spain).

## Nano Pulsar r / sq recessed



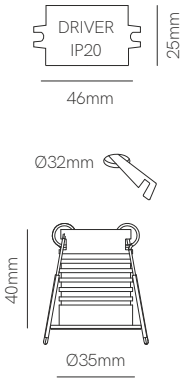


## Nano Pulsar r / sq trim



*Need Nano Pulsar




## Nano Pulsar r / sq surface



*Need Nano Pulsar




## Technical Information

| | Nano Pulsar r / sq recessed | Nano Pulsar r / sq trim | Nano Pulsar r / sq surface |
|---|---|---|---|
| Power | 3,5W | - | - |
| Installation | Recessed | Recessed | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | - | - |
| Lumens | 170 lm / 180 lm / 200 lm | - | - |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White-matt gold/Black-matt gold | White / Black |

| Code | | | Code | | Code | |
|---|---|---|---|---|---|---|
| ○ | 2.700K | 4297 | 5208 | | ○ | 4410 |
| ○ | 3.000K | 4298 | 5209 | | ● | 4411 |
| ○ | 4.000K | 4299 | 5210 | | □ | 4412 |
| ● | 2.700K | 4300 | 5211 | | ■ | 4413 |
| ● | 3.000K | 4301 | | | ⓘ | Custom RAL |
| ● | 4.000K | 4302 | | | | |
| □ | 2.700K | 4451 | | | | |
| □ | 3.000K | 4452 | | | | |
| □ | 4.000K | 4453 | | | | |
| ■ | 2.700K | 4454 | | | | |
| ■ | 3.000K | 4455 | | | | |
| ■ | 4.000K | 4456 | | | | |
| ⓘ | Custom RAL | | | | | |

1/50 | 1/4/300 | 1/50

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | +40°C -20°C



## Pulsar dimm recessed






## Pulsar trim



*Need Pulsar







Asymmetric

## Pulsar surface accessory



*Need Pulsar




## Technical Information

| | Pulsar dimm recessed | Pulsar trim | Pulsar surface accessory |
|---|---|---|---|
| Power | 8W | - | - |
| Installation | Recessed | Recessed | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | - | - |
| Lumens | 780 lm / 800 lm / 840 lm | - | - |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black / White-matt gold / Black-matt gold | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ 5057 | ◐ 5206 | ○ 5110 |
| | ● 5058 | ◑ 5207 | ● 5111 |
| | ⓘ Custom RAL | ○ 5059 Asymmetric | ⓘ Custom RAL |
| | | ● 5060 Asymmetric | |
| | | ◐ 5212 Asymmetric | |
| | | ◑ 5213 Asymmetric | |
| | | ⓘ Custom RAL | |
| | 1/10/30 | 1/50 | 1/20 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C -20°C | CCT SWITCH



| Nano Oxo r recessed | Nano Oxo sq recessed |
|---|---|
|  |  |
|  |  |
|  |  |

## Technical Information

| | | |
|---|---|---|
| Power | 4W | 4W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 380 lm | 380 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ○ 4549 | □ 4550 |
| | ● 4551 | ■ 4552 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 45° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/10/50



## Mini Oxo r recessed






## Mini Oxo sq recessed








### Technical Information

| | | |
|---|---|---|
| Power | 6W | 6W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm | 600 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 5061 | □ 5108 |
| | ● 5062 | ■ 5109 |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



## Mini Oxo rect 2 recessed



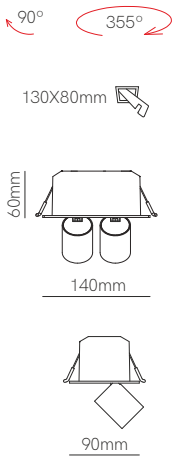


## Mini Oxo rect 4 recessed



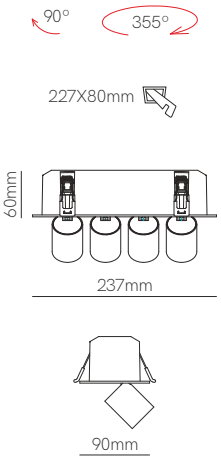


## Mini Oxo rect 6 recessed



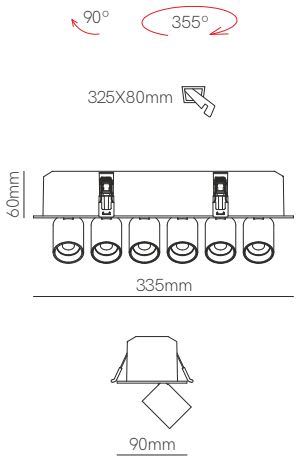


### Technical Information

| | | | |
|---|---|---|---|
| Power | 12W | 24W | 36W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.200 lm | 2.400 lm | 3.600 lm |
| Material | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black | White / Black |
| Code | ☐ 5063<br>■ 5064 | ☐ 5065<br>■ 5066 | ☐ 5067<br>■ 5068 |
| | 1/10 | 1/10 | 1/5 |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié l'iluminació. Architecture: Pablo Amorós.

## Oxo r dimm recessed








## Oxo sq dimm recessed








## Technical Information

| | Oxo r dimm recessed | Oxo sq dimm recessed |
|---|---|---|
| Power | 12W | 12W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.260 lm | 1.260 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 4457-D | □ 4459-D |
| | ● 4458-D | ■ 4460-D |
| | ⓘ Custom RAL | ⓘ Custom RAL |

## Accessories



Included with:
4457-D / 4459-D



Included with:
4457-D / 4458-D / 4459-D / 4460-D

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥80 | | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | | +50°C -20°C | CCT SWITCH | 1/20



## Mini Bora recessed






## Bora recessed








## Technical Information

| | Mini Bora recessed | Bora recessed |
|---|---|---|
| Power | 4,5W | 8,5W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 290 lm / 300 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 4589 | ○ | 2.700K | 4597 |
| | ○ | 3.000K | 4590 | ○ | 3.000K | 4598 |
| | ● | 2.700K | 4591 | ● | 2.700K | 4599 |
| | ● | 3.000K | 4592 | ● | 3.000K | 4600 |
| | ● | 2.700K | 4593 | ● | 2.700K | 4601 |
| | ● | 3.000K | 4594 | ● | 3.000K | 4602 |
| | ● | 2.700K | 4595 | ● | 2.700K | 4603 |
| | ● | 3.000K | 4596 | ● | 3.000K | 4604 |
| | UGR <10 \| PF >0,5 \| 38° | | | UGR <15 \| PF >0,6 \| 36° | | |

CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



New

## Nano Tram recessed




## Mini Tram recessed




## Tram recessed




## Tram XL recessed




*Tuya version need Tuya Smart App to work.

## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 6W | 10W | 20W | 30W |
| Installation | Recessed | Recessed | Recessed | Recessed |
| Color Temperature | Tuya 2.700K - 6.000K | Dali 2.700K - 6.000K | Tuya 2.700K - 6.000K | Tuya 2.700K -6.000K |
| Lumens | 220 lm | 500 lm | 1.000 lm | 1.500 lm |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black | White / Black |
| Code | ☐ 4731 | ☐ 4733-V2 | ☐ 4735 | ☐ 4737 |
| | ■ 4732 | ■ 4734-V2 | ■ 4736 | ■ 4738 |
| | tuya \| 1/50 | DALI 2 \| 1/40 | tuya \| 1/20 | tuya \| 1/20 |

## Accessories



Tuya Gateway Wifi

☐ 4956

CE RoHS

*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C -10°C



## Compac r recessed






## Compac sq recessed








### Technical Information

| | Compac r recessed | Compac sq recessed |
|---|---|---|
| Power | 8W | 8W |
| Installation | Recessed | Recessed |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 594 lm / 607 lm / 660 lm | 594 lm / 607 lm / 660 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |

| Code | | | | | |
|---|---|---|---|---|---|
| | ○ | 2.700K | 3951 | □ 2.700K | 3948 |
| | ○ | 3.000K | 3952 | □ 3.000K | 3949 |
| | ○ | 4.000K | 3953 | □ 4.000K | 3950 |
| | ⓘ Custom RAL | | | ⓘ Custom RAL | |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | 90° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 1/6/30

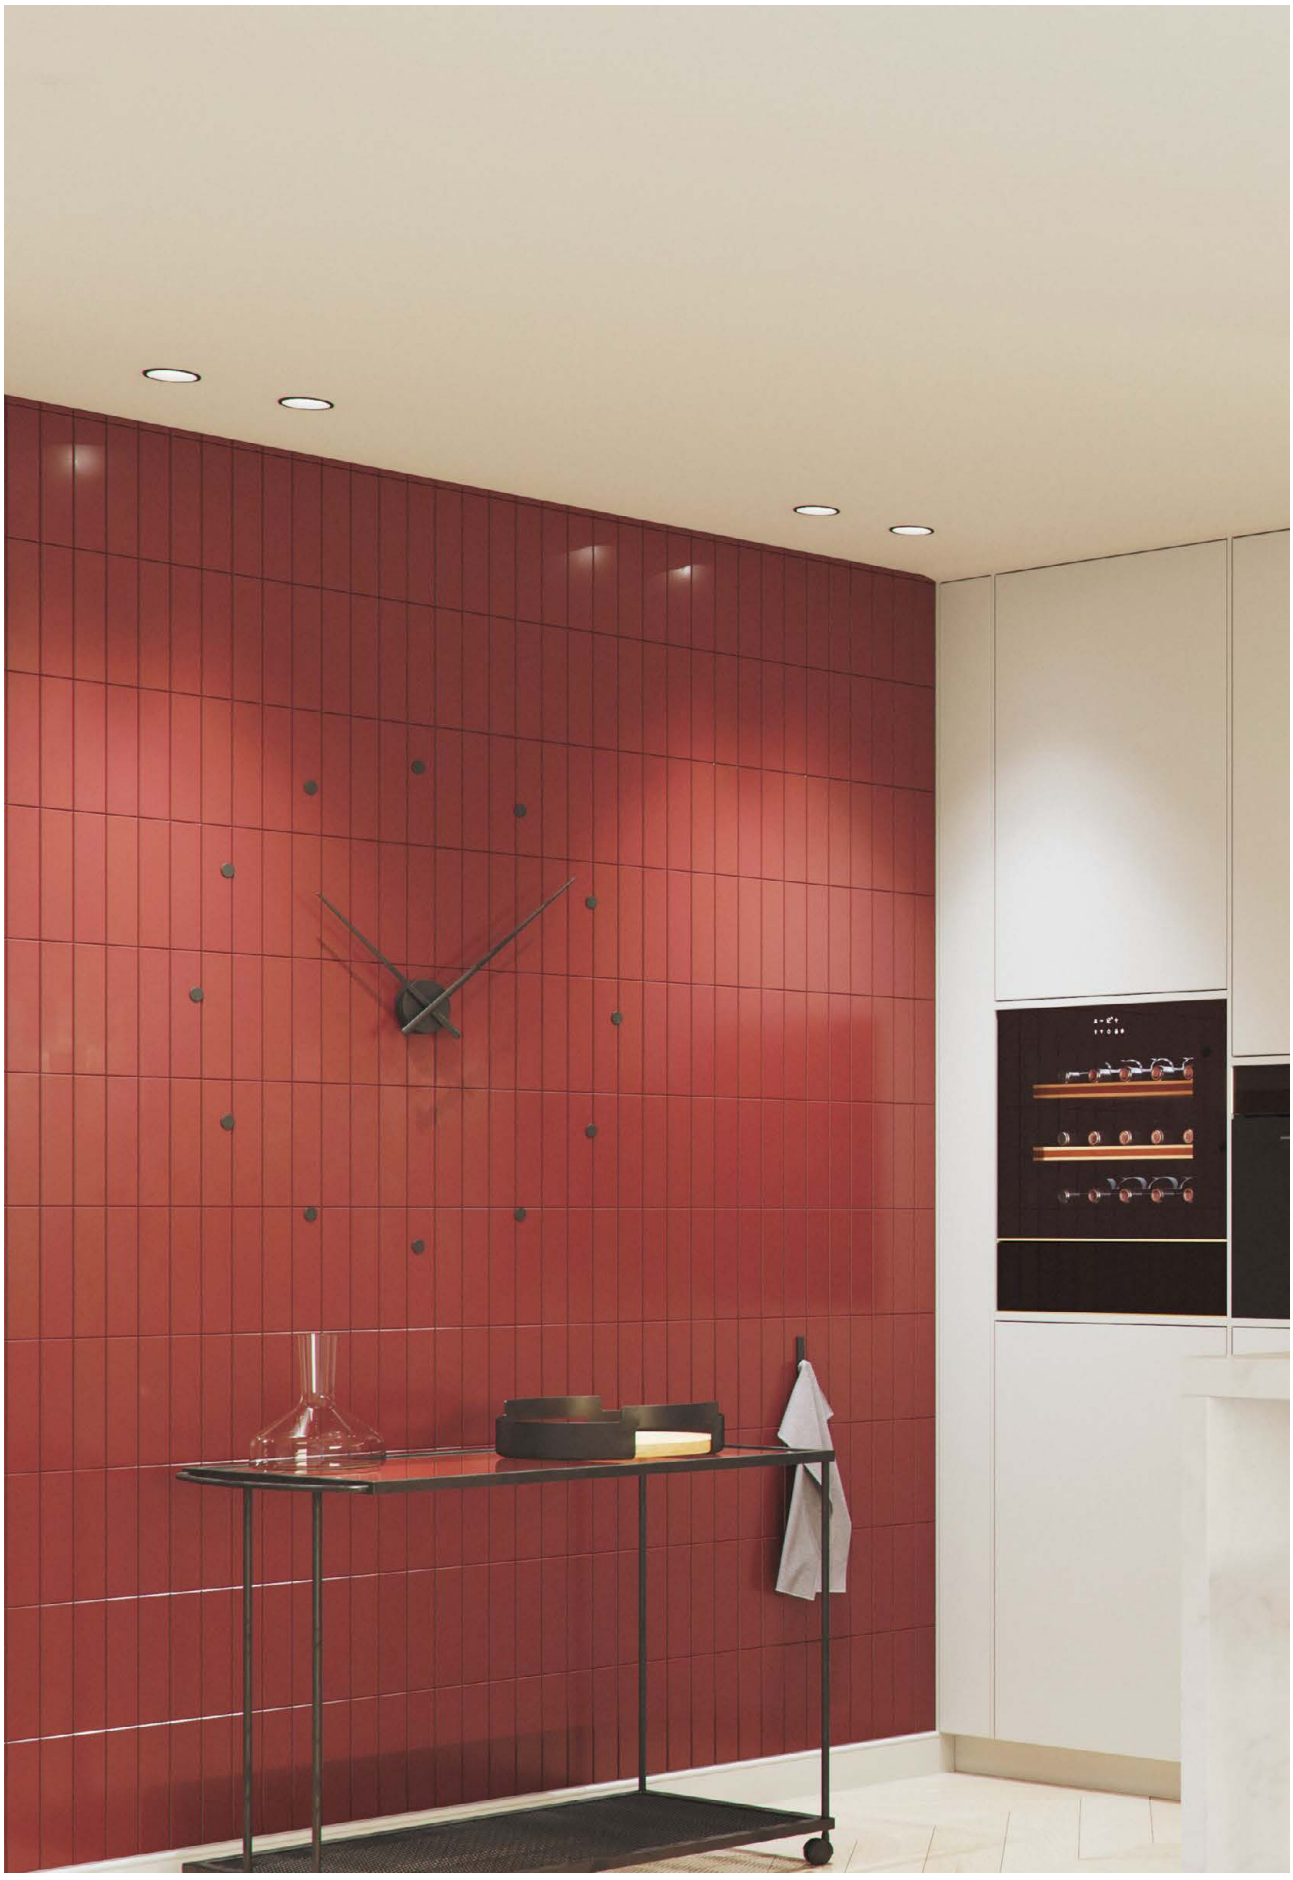

| Pulcom r recessed | Pulcom sq recessed | Pulcom r recessed asymm | Pulcom sq recessed asymm |
|---|---|---|---|
|  |  |  |  |
|  |  |  |  |

## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 8W | 8W | 8W | 8W |
| Installation | Recessed | Recessed | Recessed | Recessed |
| Color Temperature (Switch) | 2.700K/3.200K/4.000K | 2.700K/3.200K/4.000K | 2.700K/3.200K/4.000K | 2.700K/3.200K/4.000K |
| Lumens | 800 lm | 800 lm | 800 lm | 800 lm |
| Material | Polycarbonate | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black | White / Black | White / Black |
| Code | ○ 4742 | □ 4744 | ○ 4743 | □ 4745 |
| | ● 4746 | ■ 4748 | ● 4747 | ■ 4749 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/5/20



Ifni Hairdresser, Gipuzkoa (Spain). Design: Basoko.eus Photography: Maider Agirre.

## Pulcom led accessory






## Pulcom trim











## Pulcom asymm trim











## Pulcom r surface






*Pulcom trim and surface need Pulcom led.

## Technical Information

| | Pulcom led accessory | Pulcom trim | Pulcom asymm trim | Pulcom r surface |
|---|---|---|---|---|
| Power | 8W | - | - | - |
| Installation | Surface / Recessed | Recessed | Recessed | Surface |
| Color Temperature | 2.700K/3.200K/4.000K | - | - | - |
| Lumens | 800 lm | - | - | - |
| Material | Polycarbonate | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black / Wood | White / Black | White / Black / Wood |

| Code | | | | |
|---|---|---|---|---|
| | ○ 4763 | ○ 4761 | ○ 4821 | ○ 5034 |
| | ● 4764 | ● 4762 | ● 4822 | ● 5035 |
| | | ◌ 4935 | □ 4825 | ◌ 5036 |
| | | □ 4823 | ■ 4826 | ⓘ Custom RAL |
| | | ■ 4824 | ⓘ Custom RAL | |
| | | ⓘ Custom RAL | | |
| | 1/100 | 1/100 | 1/100 | 1/50 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH

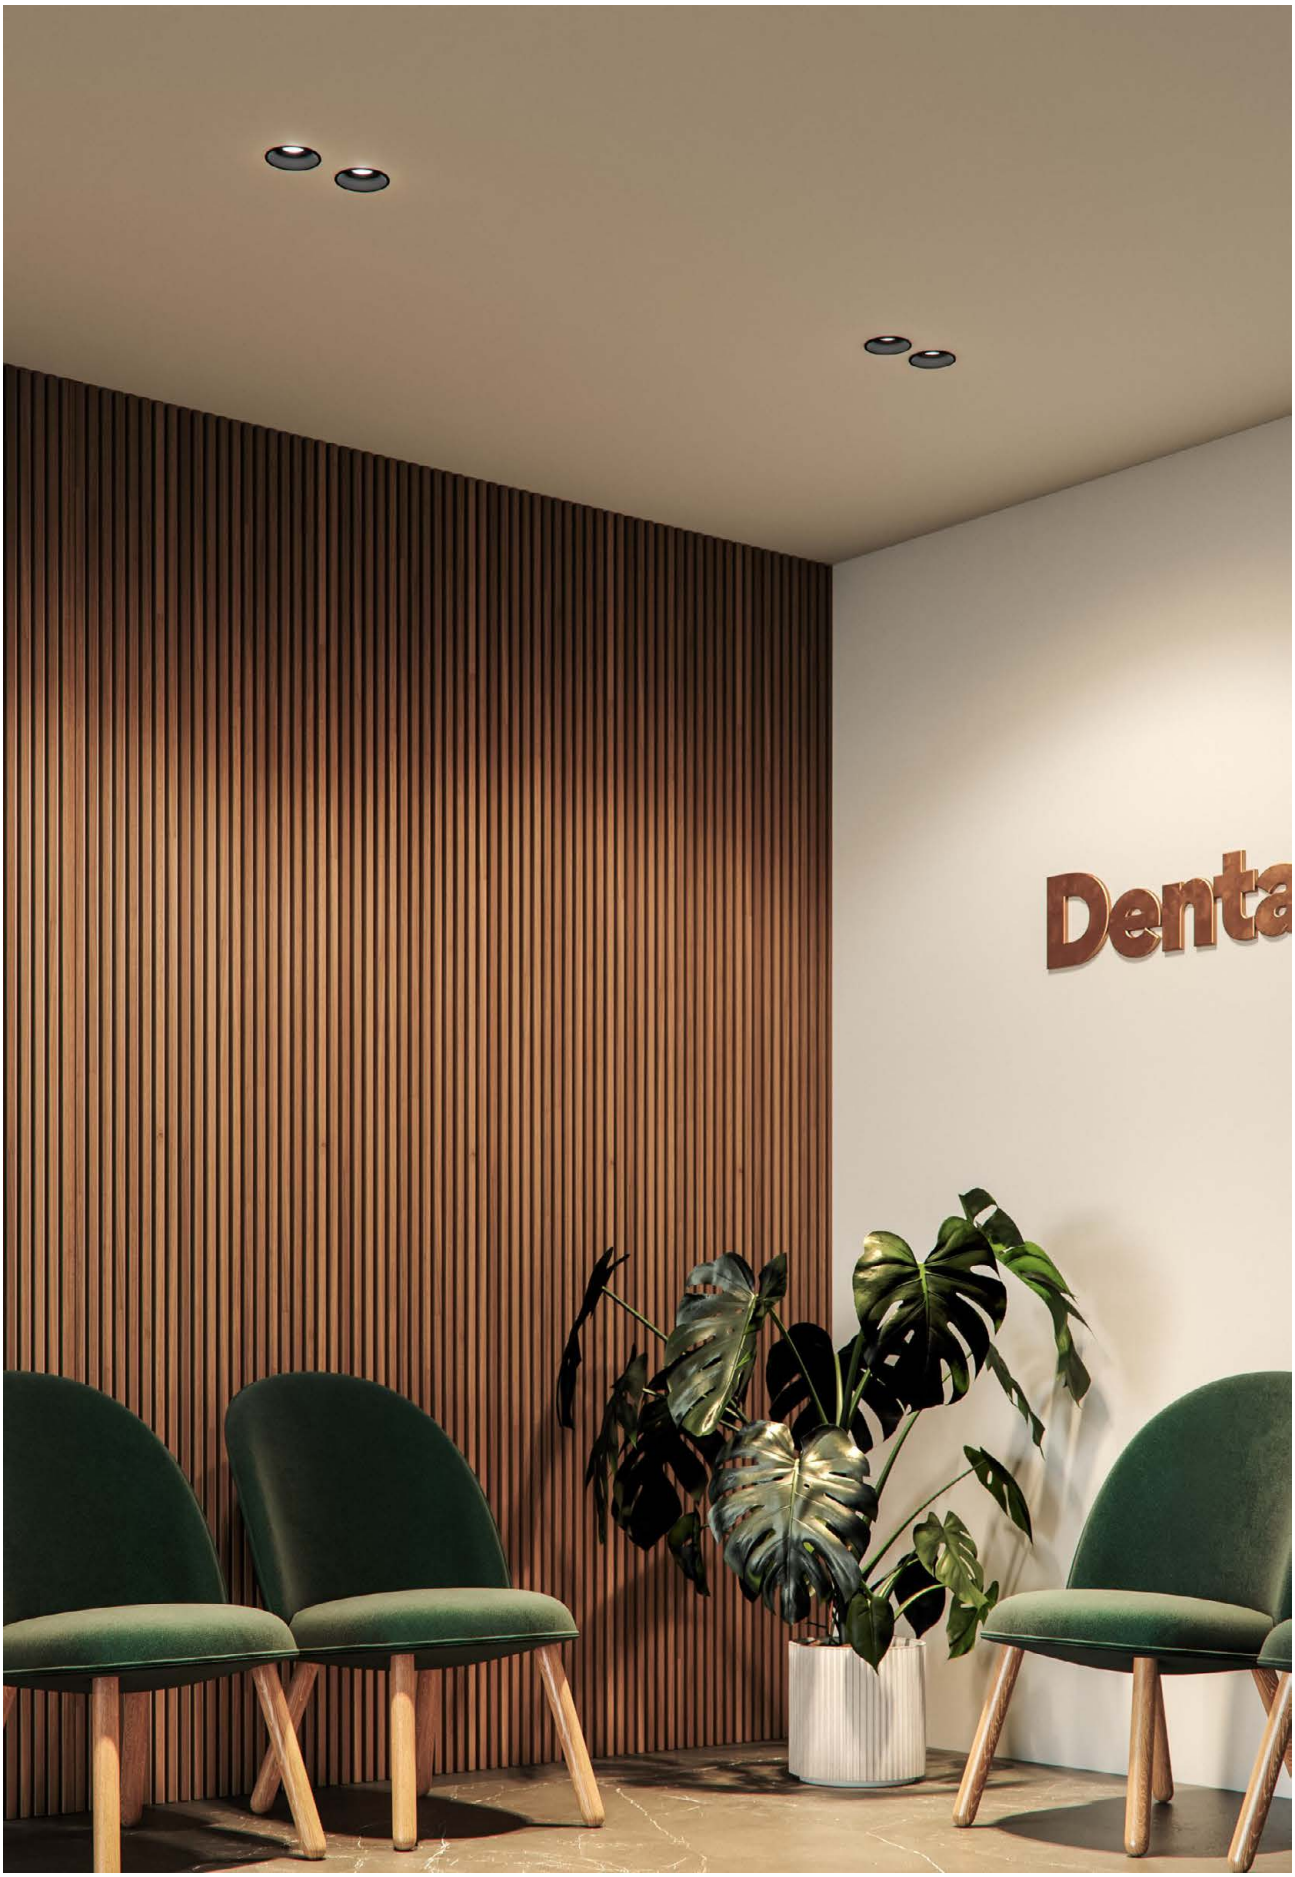
Denta

## Tao recessed








### Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Recessed |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 925 lm / 1.000 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 3.000K | 3942 |
| | ○ | 4.000K | 3943 |
| | ● | 3.000K | 3944 |
| | ● | 4.000K | 3945 |
| ⓘ | | Custom RAL | |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 32 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | +40°C -20°C | 1/40



## Noi recessed






## Noi dimm recessed








## Technical Information

| | | |
|---|---|---|
| Power | 14W | 14W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | 3.000K / 4.000K |
| Lumens | 1.320 lm | 1.100 lm / 1.320 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |

| Code | | | |
|---|---|---|---|
| | ○ 5019 | ○ 3.000K | 3485 |
| | | ○ 4.000K | 3486 |

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/6



## Mini Thessis recessed






## Thessis recessed






## Thessis XL recessed







RECESSED

### Technical Information

| | Mini Thessis recessed | Thessis recessed | Thessis XL recessed |
|---|---|---|---|
| Power | 15W | 25W | 35W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.300 lm | 2.625 lm | 3.100 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White / Black | White / Black | White |
| Code | ○ 4766 | ○ 4236 | ○ 5030 |
| | ● 4987 | ● 4988 | ⓘ Custom RAL |
| | ⓘ Custom RAL | ⓘ Custom RAL | |
| | UGR <19 \| 1/10 | UGR <19 \| 1/6 | 1/6 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH



## Mini Thessis dimm recessed






## Thessis dimm recessed








## Technical Information

| | | |
|---|---|---|
| Power | 15W | 25W |
| Installation | Recessed | Recessed |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.300 lm | 2.625 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 4767 | ○ 4691 |
| | ● 5574 New | ● 5575 New |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/10 | 1/6 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH



## Air recessed








## Technical Information

| | |
|---|---|
| Power | 22W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.200 lm |
| Material | Polybutylene and Polycarbonate |
| Finishes | White |

| | |
|---|---|
| Code | ○ 5018 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 100/277 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/6



## Bonn recessed



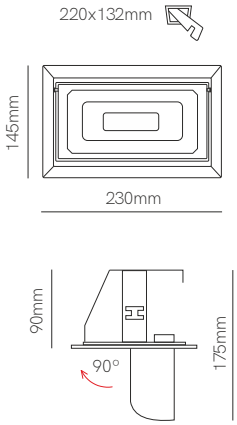




## Technical Information

| | |
|---|---|
| Power | 40W |
| Installation | Recessed |
| Color Temperature | 3.000K / 4.100K |
| Lumens | 4.750 lm / 4.800 lm |
| Material | Aluminium |
| Finishes | White / Gray |

| Code | | | |
|---|---|---|---|
| | ☐ | 3.000K | 4097 |
| | ☐ | 4.100K | 4096 |
| | ■ | 3.000K | 4099 |
| | ■ | 4.100K | 4098 |
| ⓘ | | Custom RAL | |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | 1/12



## Fijo recessed






## Basculante recessed






## Eclipse recessed








*G5.3 Bulbholder included.

## Technical Information

| | Fijo recessed | Basculante recessed | Eclipse recessed |
|---|---|---|---|
| Installation | Recessed | Recessed | Recessed |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Gray / Brushed chrome | White / Gray / Brushed chrome | Gray / Brushed chrome |
| Bulbholder | 50mm G5.3 | 50mm G5.3 | 50mm G5.3 |

| Code | Fijo recessed | Basculante recessed | Eclipse recessed |
|---|---|---|---|
| | ○ 206280 | ○ 205280 | □ 222230 |
| | ● 206284 | ● 205284 | □ 222238 |
| | ● 206285 | ● 205285 | ⓘ Custom RAL |
| | ⓘ Custom RAL | ⓘ Custom RAL | |

## Accessories



Bulbholder GU10

● 301182

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50

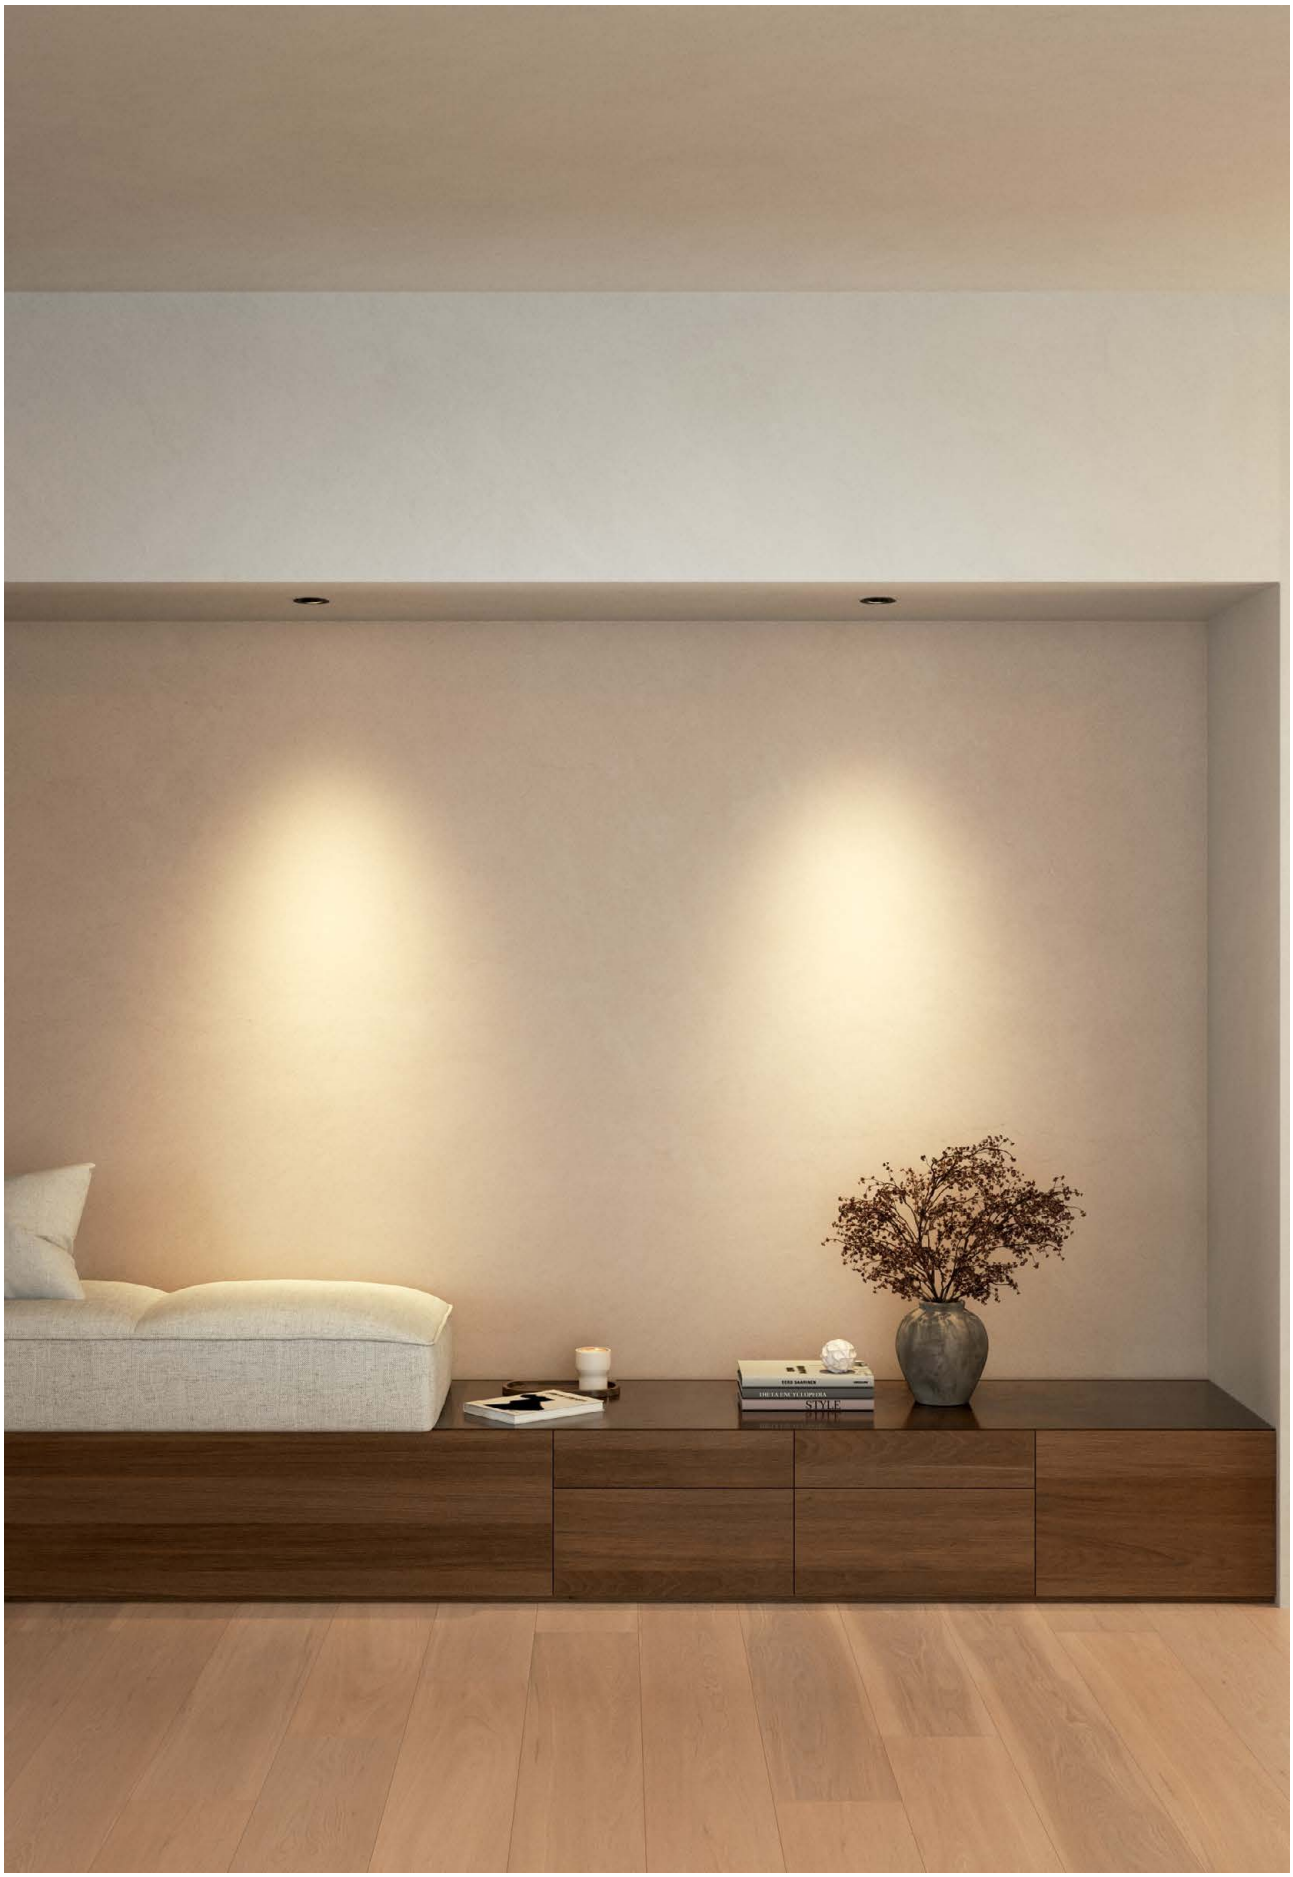
STYLE

## One recessed






## Zio recessed








*GU10 Bulbholder included, except 258226C and 257226C.

## Technical Information

| | One recessed | Zio recessed |
|---|---|---|
| Installation | Recessed | Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Brushed alumin. | White / Black / Brushed alumin. |
| Bulbholder | 50mm GU10 | 50mm GU10 |

| Code | | |
|---|---|---|
| | ○ 4478 | □ 4476 |
| | ● 4479 | ■ 4477 |
| | ○ 258226C | □ 257226C |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50



## Luk r recessed






## Luk r recessed IP






## Luk sq recessed IP






*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.

## Technical Information

| | | | |
|---|---|---|---|
| Installation | Recessed | Recessed | Recessed |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Bulbholder | 50mm GU10 | 50mm G5.3 | 50mm G5.3 |
| Code | ○ 4758 | ○ 5214 | □ 5216 |
| | ● 4759 | ● 5215 | ■ 5217 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | IP 20 | IP 65 | IP 65 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/100

RECESSED



## Bathroom recessed






## Rok recessed






*G5.3 Bulbholder included.

## Technical Information

| | Bathroom recessed | Rok recessed |
|---|---|---|
| Installation | Recessed | Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Brushed aluminium | White / Black / Brushed chrome |
| Bulbholder | 50mm G5.3 | 50mm G5.3 |
| Code | ○ 223232 | ○ 4755 |
| | ● 223233 | ● 4756 |
| | | ● 4757 |
| | | ⓘ Custom RAL |
| | IP 44 | IP 65 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50



## Avant r recessed






## Avant sq recessed






*GU10 Bulbholder included.

## Technical Information

| | | |
|---|---|---|
| Installation | Recessed | Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Bulbholder | 111mm GU10 | 111mm GU10 |

| Code | | |
|---|---|---|
| | ○ 4486 | □ 4484 |
| | ● 4487 | ■ 4485 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20





# Surface

## Nano Golf surface




## Mini Golf surface

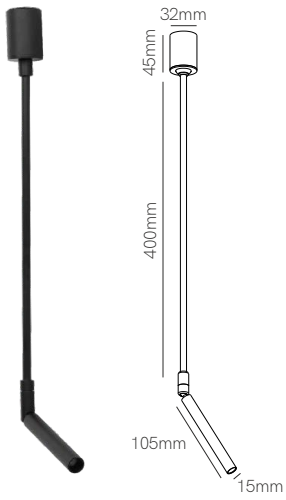


## Technical Information

| | Nano Golf surface | Mini Golf surface |
|---|---|---|
| Power | 3,5W | 3,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 125 lm | 125 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5285 | ○ | 2.700K | 5291 |
| | ○ | 3.000K | 5286 | ○ | 3.000K | 5292 |
| | ○ | 4.000K | 5287 | ○ | 4.000K | 5293 |
| | ● | 2.700K | 5288 | ● | 2.700K | 5294 |
| | ● | 3.000K | 5289 | ● | 3.000K | 5295 |
| | ● | 4.000K | 5290 | ● | 4.000K | 5296 |

CE RoHS EMC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/10

## Golf surface

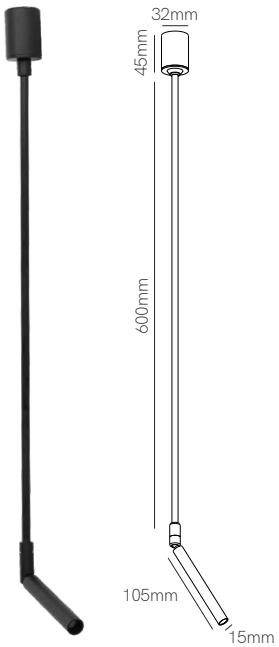


## Golf XL surface

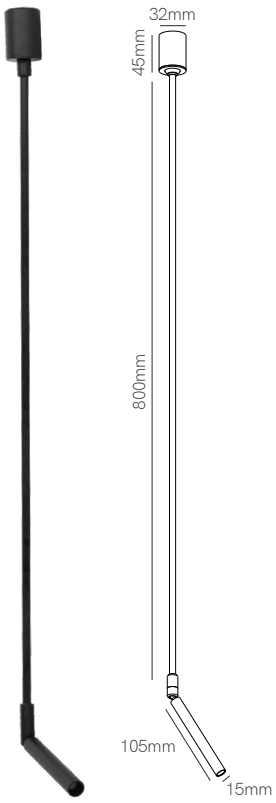




## Technical Information

| | Golf surface | Golf XL surface |
|---|---|---|
| Power | 3,5W | 3,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 125 lm | 125 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5297 | ○ | 2.700K | 5303 |
| | ○ | 3.000K | 5298 | ○ | 3.000K | 5304 |
| | ○ | 4.000K | 5299 | ○ | 4.000K | 5305 |
| | ● | 2.700K | 5300 | ● | 2.700K | 5306 |
| | ● | 3.000K | 5301 | ● | 3.000K | 5307 |
| | ● | 4.000K | 5302 | ● | 4.000K | 5308 |

CE RoHS EMC

3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C -20°C | 1/10



## Mini Bora surface






## Bora surface






## Technical Information

| | Mini Bora surface | Bora surface |
|---|---|---|
| Power | 4,5W | 8,5W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 290 lm / 300 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 4621 | ○ | 2.700K | 4629 |
| | ○ | 3.000K | 4622 | ○ | 3.000K | 4630 |
| | ● | 2.700K | 4623 | ● | 2.700K | 4631 |
| | ● | 3.000K | 4624 | ● | 3.000K | 4632 |
| | ● | 2.700K | 4625 | ● | 2.700K | 4633 |
| | ● | 3.000K | 4626 | ● | 3.000K | 4634 |
| | ● | 2.700K | 4627 | ● | 2.700K | 4635 |
| | ● | 3.000K | 4628 | ● | 3.000K | 4636 |
| | UGR <10 \| PF >0,5 \| 38° | | | UGR <15 \| PF >0,6 \| 36° | | |

CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



## Alp surface








### Technical Information

| | |
|---|---|
| Power | 4,5W |
| Installation | Surface |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 220 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | | |
|---|---|---|---|
| | ○ | 2.700K | 5357 |
| | ○ | 3.000K | 5358 |
| | ● | 2.700K | 5360 |
| | ● | 3.000K | 5361 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 36° | 50/60 Hz | +40°C -20°C | 1/18



## Plus surface










## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.040 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 4522 |
| | ● 4523 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 15° 35° 60° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20

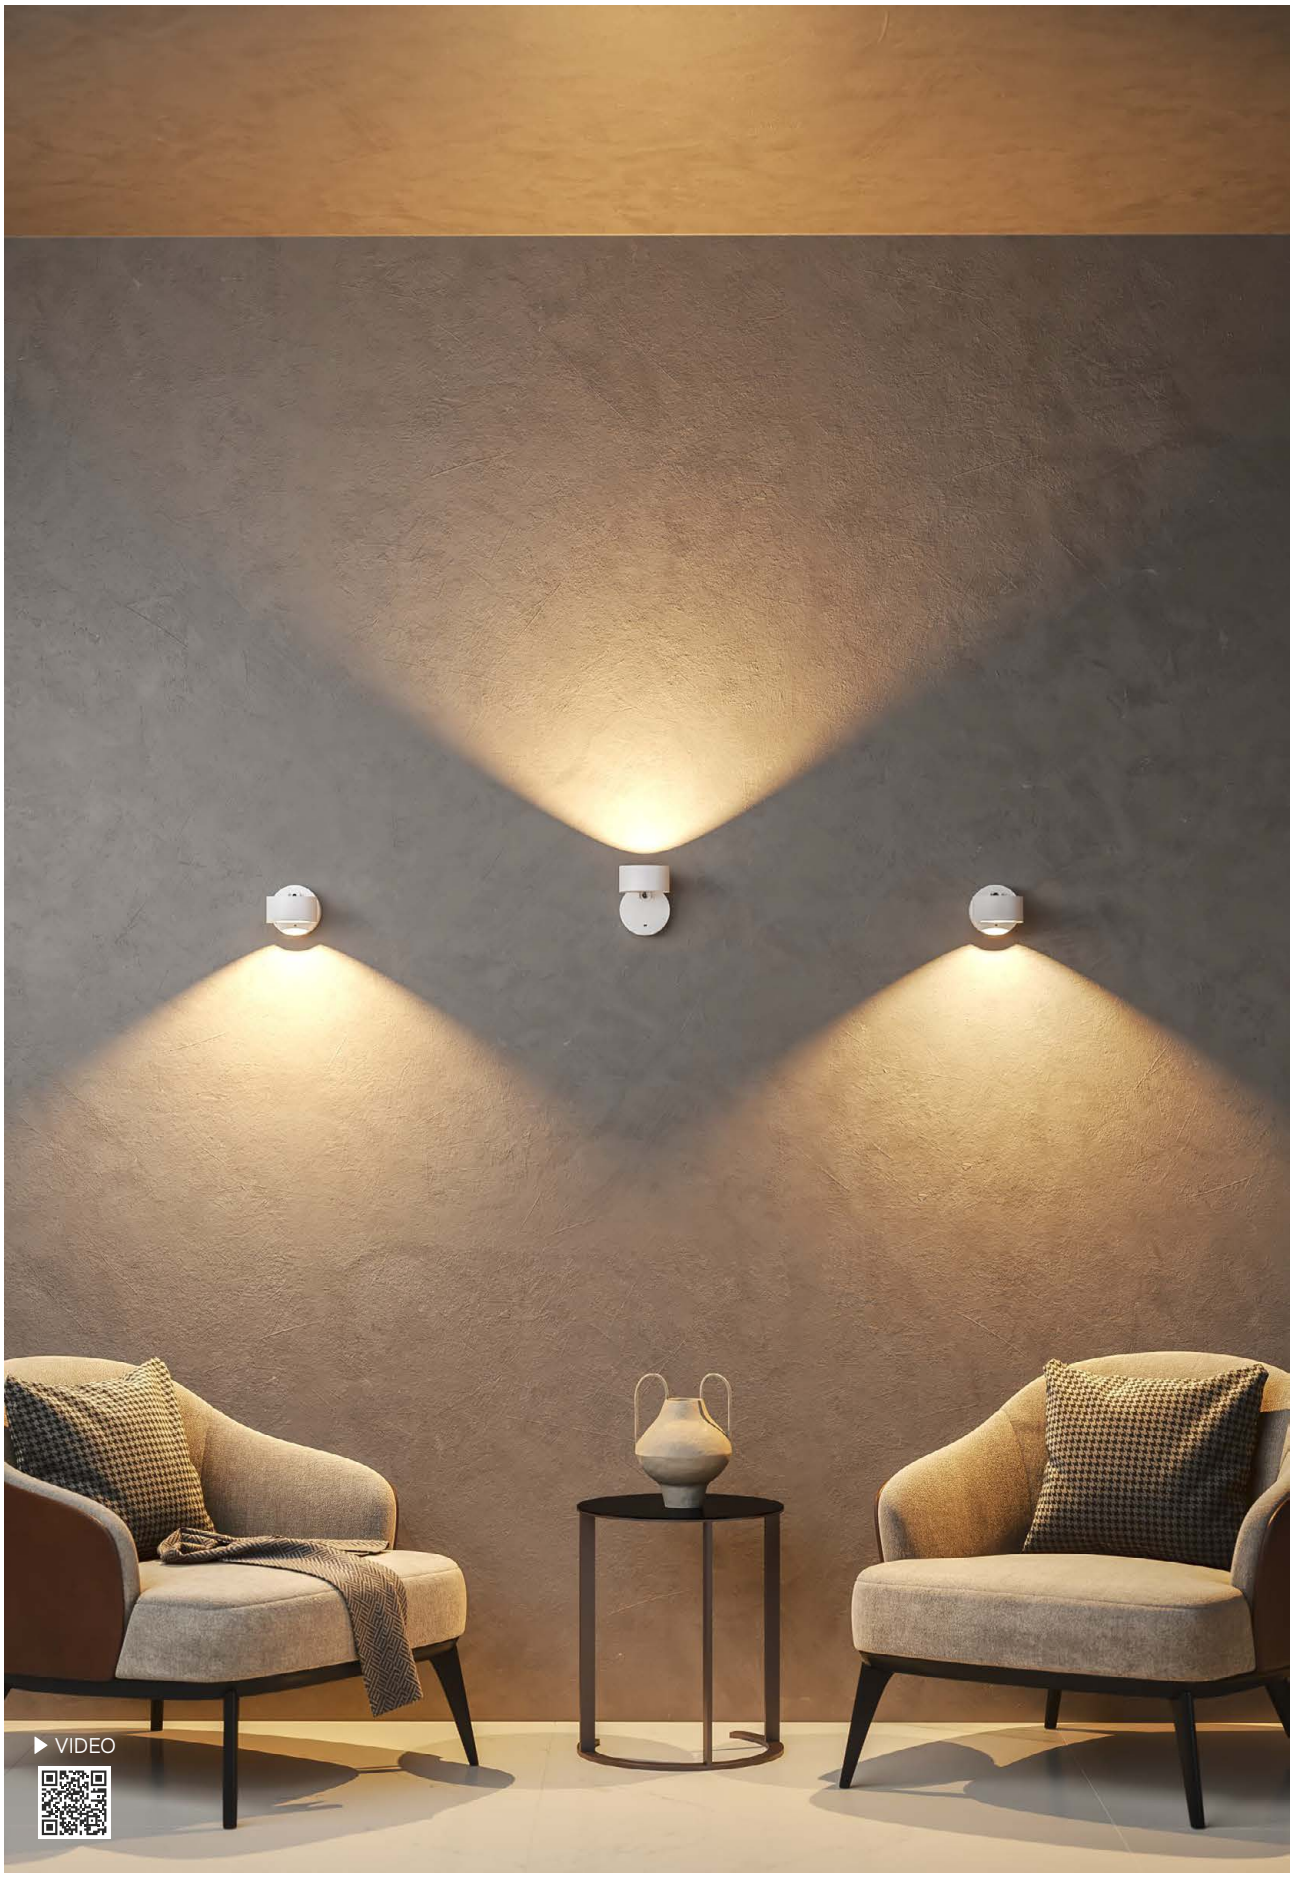
▶ VIDEO

## Mini Concord surface








## Concord surface








SURFACE

## Technical Information

| | Mini Concord surface | Concord surface |
|---|---|---|
| Power | 7W | 14W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 850 lm | 1.205 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 4334-N | ○ 5071 |
| | ● 4335-N | ● 5072 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | CRI ≥80 \| 1/30 | CRI ≥97 \| 1/4/12 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH



## Mini Rubyc surface








## Rubyc surface








SURFACE

## Technical Information

| | Mini Rubyc surface | Rubyc surface |
|---|---|---|
| Power | 7W | 14W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 850 lm | 1.205 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Code | ☐ 4332-N | ☐ 5069 |
| | ■ 4333-N | ■ 5070 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | CRI ≥80 \| 1/30 | CRI ≥97 \| 1/4/12 |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | 40° | 50/60 Hz | +40°C -10°C | TRIAC DIMM | CCT SWITCH

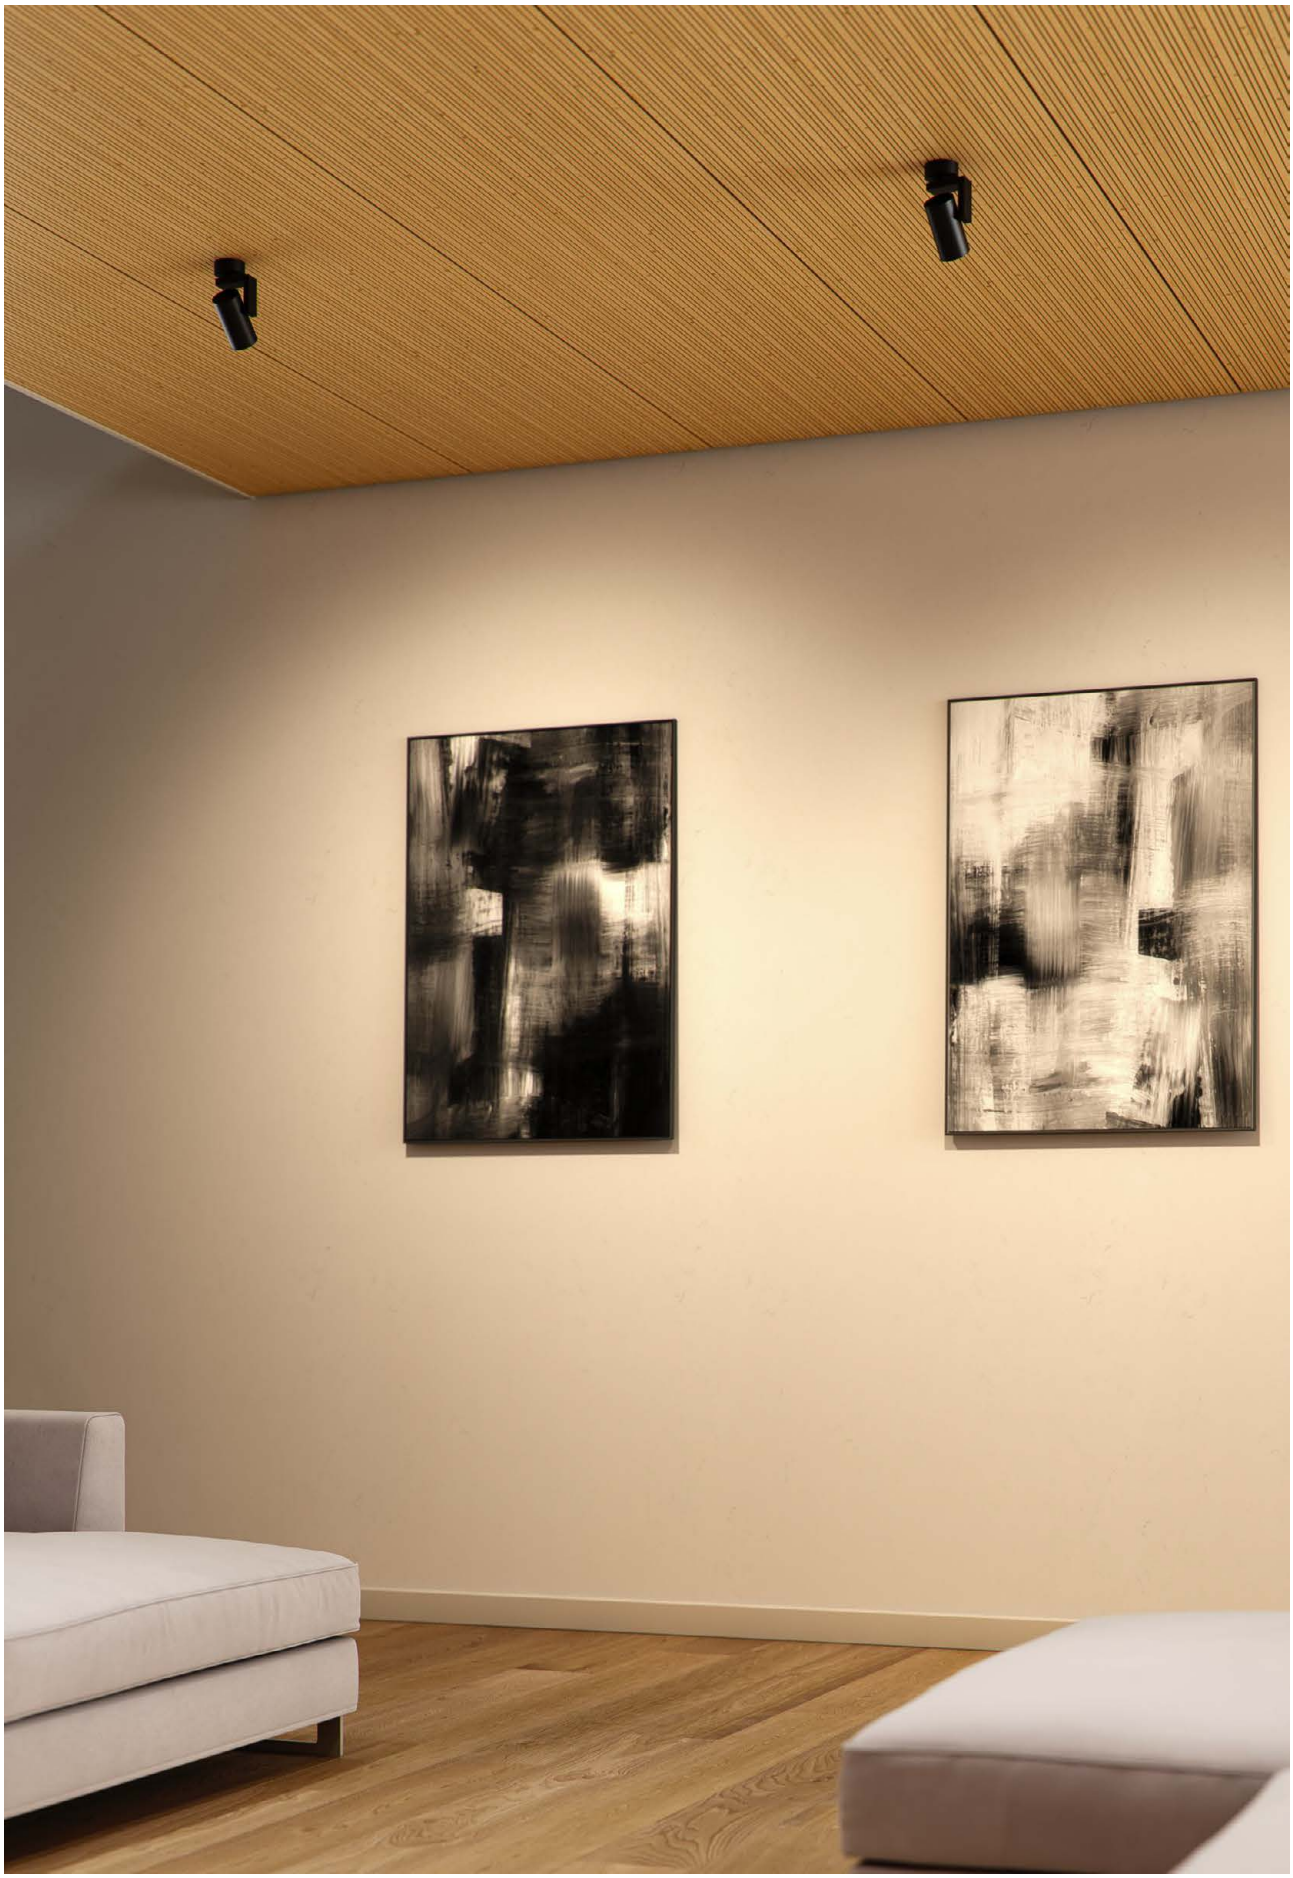

## Volt r base



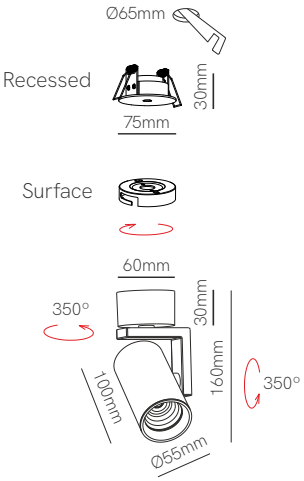


## Volt sq base



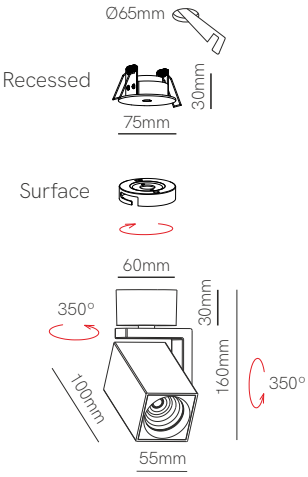


*Included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | Volt r base | Volt sq base |
|---|---|---|
| Power | 8W | 8W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm | 570 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 5041 | □ 5043 |
| | ● 5042 | ■ 5044 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20


1

## Volt r3 surface






## Volt sq3 surface








### Technical Information

| | Volt r3 surface | Volt sq3 surface |
|---|---|---|
| Power | 24W | 24W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.700 lm | 1.700 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 5045 | □ 5047 |
| | ● 5046 | ■ 5048 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS EMC

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | PF >0,9 | CRI ≥90 | 38° | IK06 | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/10

## Volt r GU10 base









## Volt sq GU10 base









*Included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Recessed | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) |

| Code | | |
|---|---|---|
| | ○ 5049 | □ 5051 |
| | ● 5050 | ■ 5052 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/20

## Volt r3 GU10 surface



## Volt sq3 GU10 surface



Base width 75mm







Base width 75mm







SURFACE

## Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) |

| Code | | |
|---|---|---|
| | ○ 5053 | □ 5055 |
| | ● 5054 | ■ 5056 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | IK06 | 1/10



## Picolo base



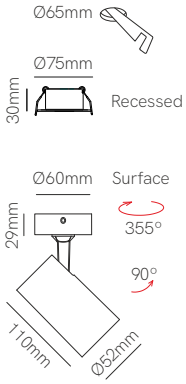




## Technical Information

| | |
|---|---|
| Power | 9,5W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.300 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 4833 |
| | ● 4834 |
| ① | Custom RAL |

CE RoHS

① Consult delivery terms and conditions.
*Surface and recessed base included.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20


Dior
LOUIS VUITTON
PRADA
RUINS
Zaha Hadid
CONCRETE IN DESIGN
CITY & ARCHITECTURE
ARCHITECTURE

## Picolo GU10 surface



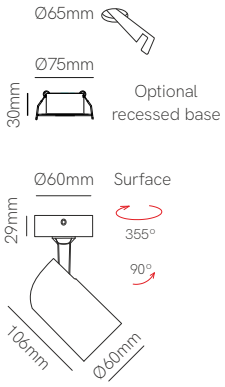


## Picolo AR111 surface



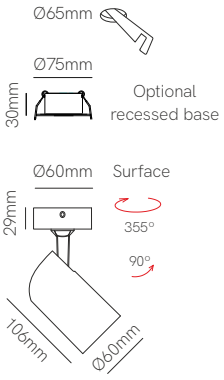




## Technical Information

| | Picolo GU10 surface | Picolo AR111 surface |
|---|---|---|
| Installation | Surface / Recessed | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White |
| Bulbholder | 50mm GU10 (except Power bulb) | 111mm GU10 |

| Code | | |
|---|---|---|
| | ○ 4050 | ○ 4433 |
| | ● 4049 | ⓘ Custom RAL |
| | ⓘ Custom RAL | |

ⓘ Consult delivery terms and conditions.

## Accessories



Recessed base (not included)
○ 4835 ● 4836

CE RoHS

*GU10 bulbholder included.

5 YEARS WARRANTY | IP 20 | 220/240 VAC | 1/40


▶ VIDEO

## Crown base




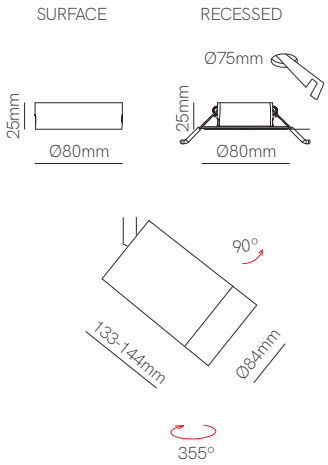




## Technical Information

| | |
|---|---|
| Power | 25W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.300 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 5224 |
| | ● 5225 |

CE RoHS

Includes surface and recessed base (not mounted).

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C -20°C | CCT SWITCH | 1/20



## Mini Kora r surface






## Kora r surface








### Technical Information

| | Mini Kora r surface | Kora r surface |
|---|---|---|
| Power | 20W | 25W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm | 3.000 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |
| Code | ○ 4832 | ○ 4500-V2 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5


iting
om
123

## Mini Kora sq surface






## Kora sq surface








## Technical Information

| | Mini Kora sq surface | Kora sq surface |
|---|---|---|
| Power | 20W | 25W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.400 lm | 3.000 lm |
| Material | Polybutylene and Polycarbonate | Polybutylene and Polycarbonate |
| Finishes | White | White |
| Code | ☐ 4831 | ☐ 4499-V2 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C -25°C | CCT SWITCH | 1/5



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

## Nox surface








## Technical Information

| | |
|---|---|
| Power | 30W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 2.460 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ○ 4241-N |
| | ● 4242-N |
| ⓘ | Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Included with:
4241-N



Included with:
4241-N / 4242-N

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥94 | 15° 24° 40° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/8



## One surface






## Zio surface






## Avant r surface








One / Zio

Avant

*GU10 Bulbholder included.

## Technical Information

| | One surface | Zio surface | Avant r surface |
|---|---|---|---|
| Installation | Surface | Surface | Surface |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) | 111mm GU10 |
| Code | ○ 4480 | □ 4482 | ○ 4933 |
| | ● 4481 | ■ 4483 | ● 4934 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/20 | 1/20 | 1/10 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 |



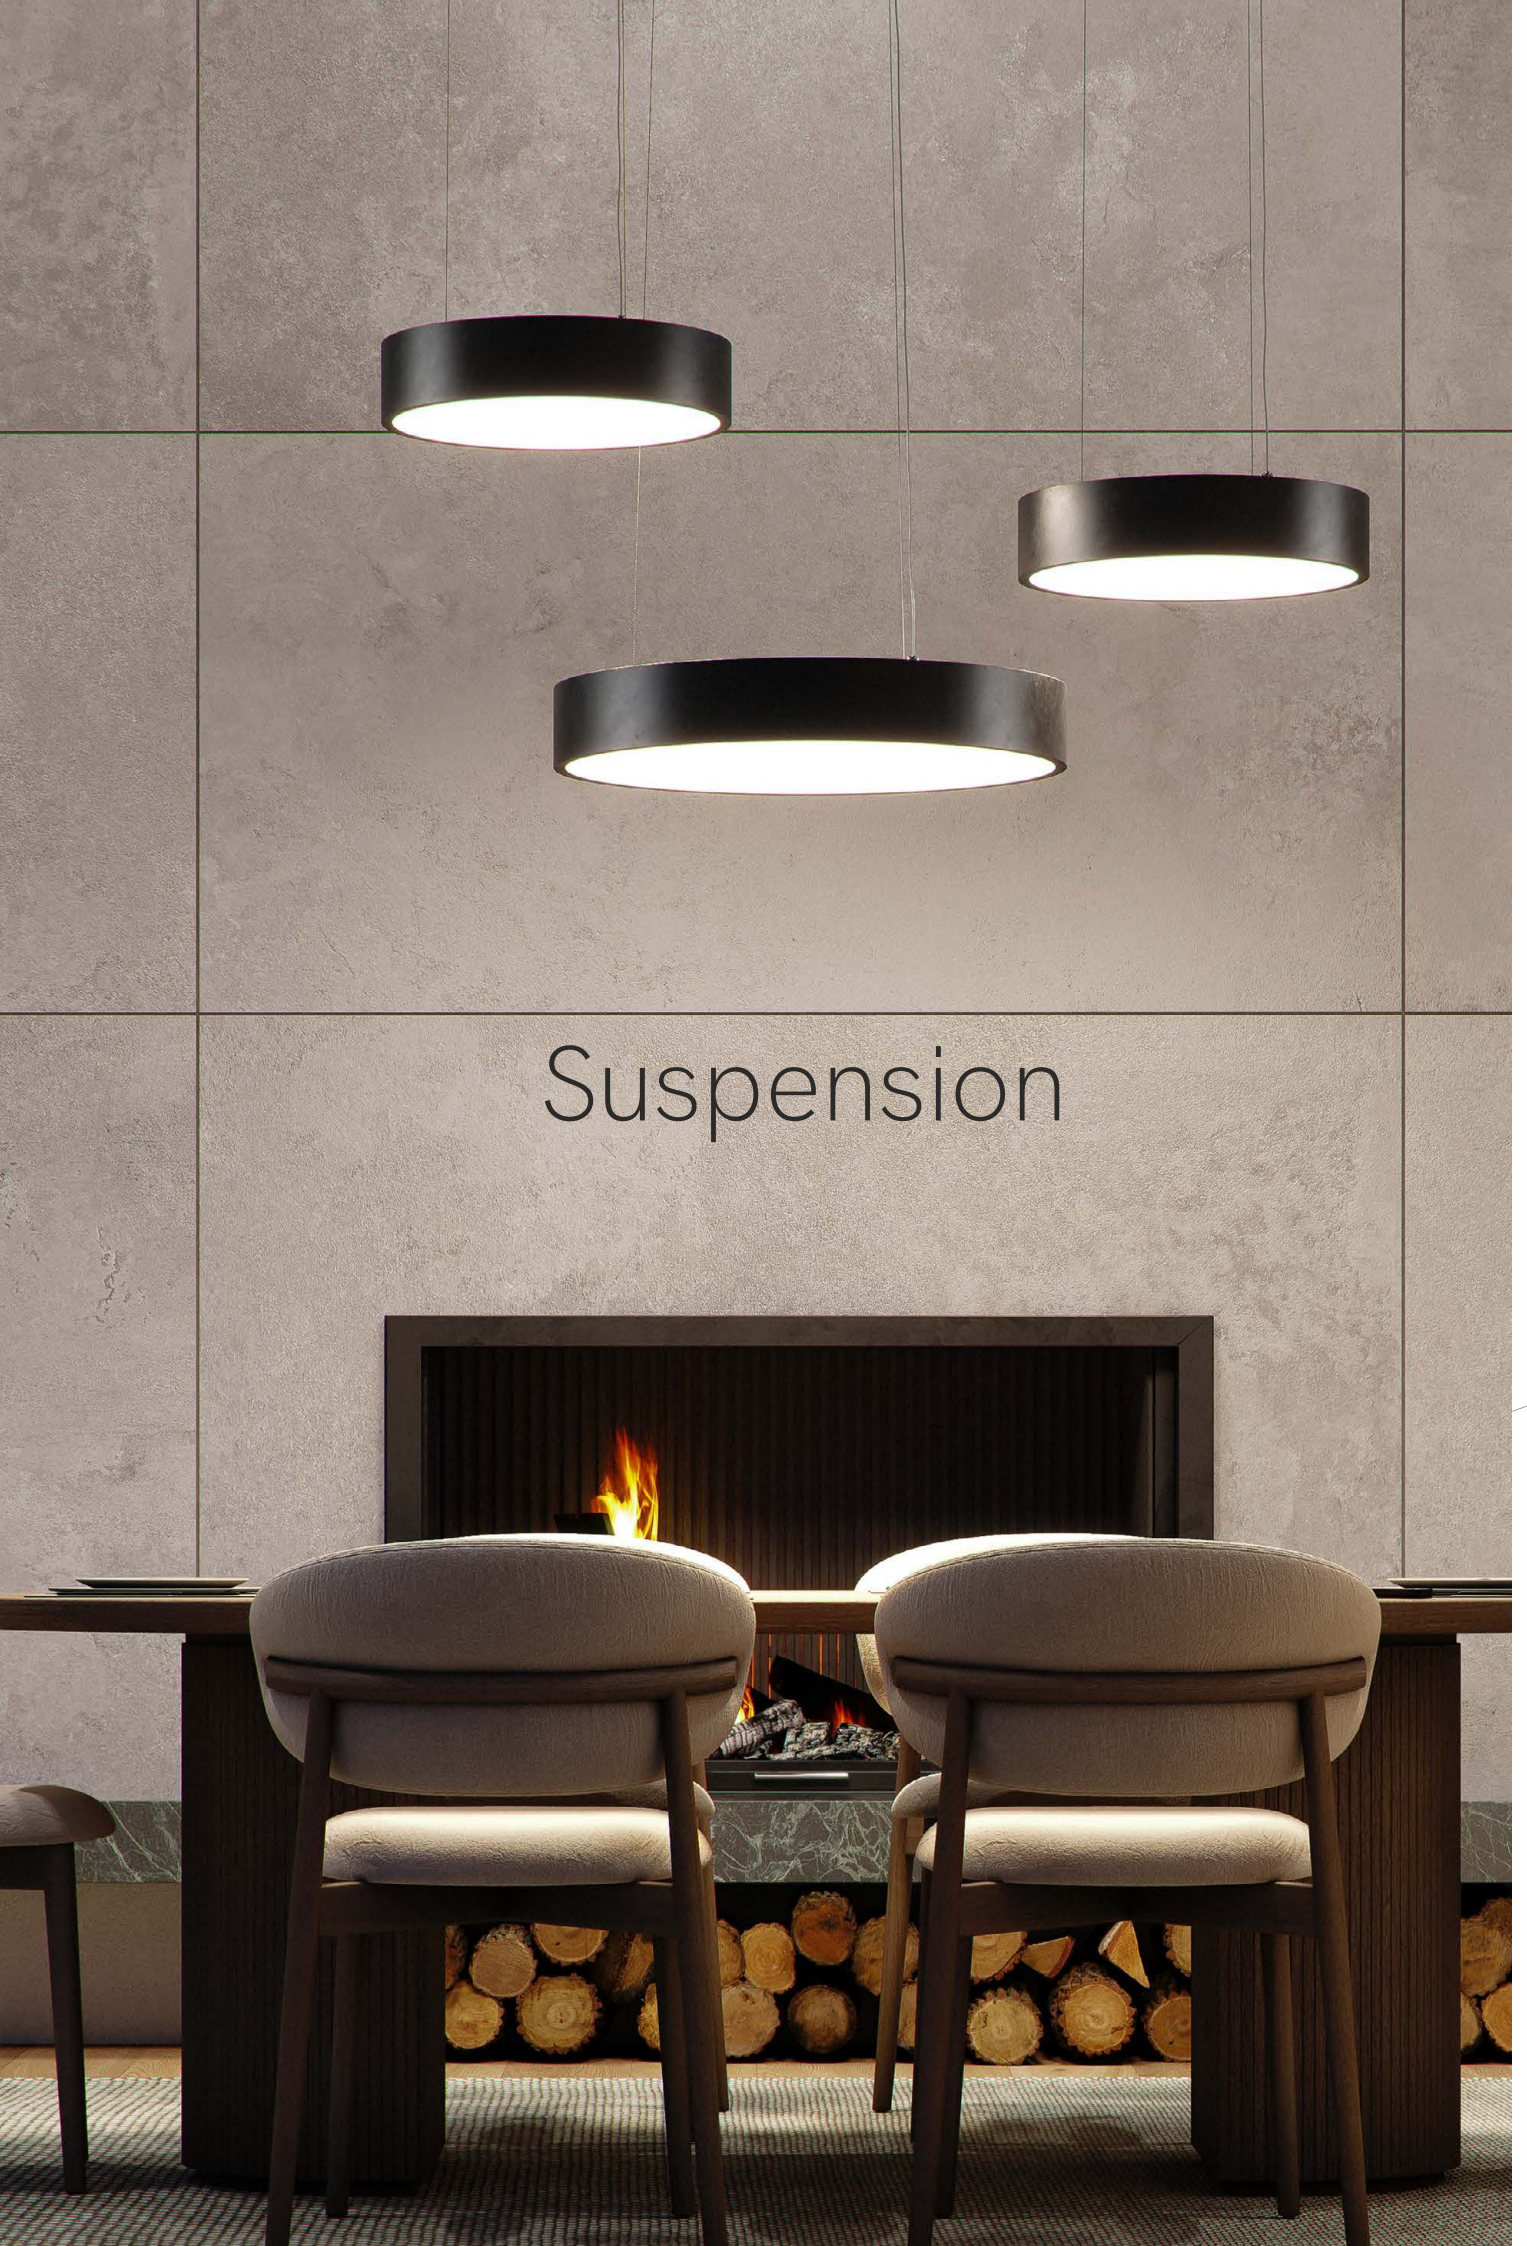

# Suspension

# Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.

Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.





The light points of the Space system can be moved away from the base and brought to any place desired though the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.

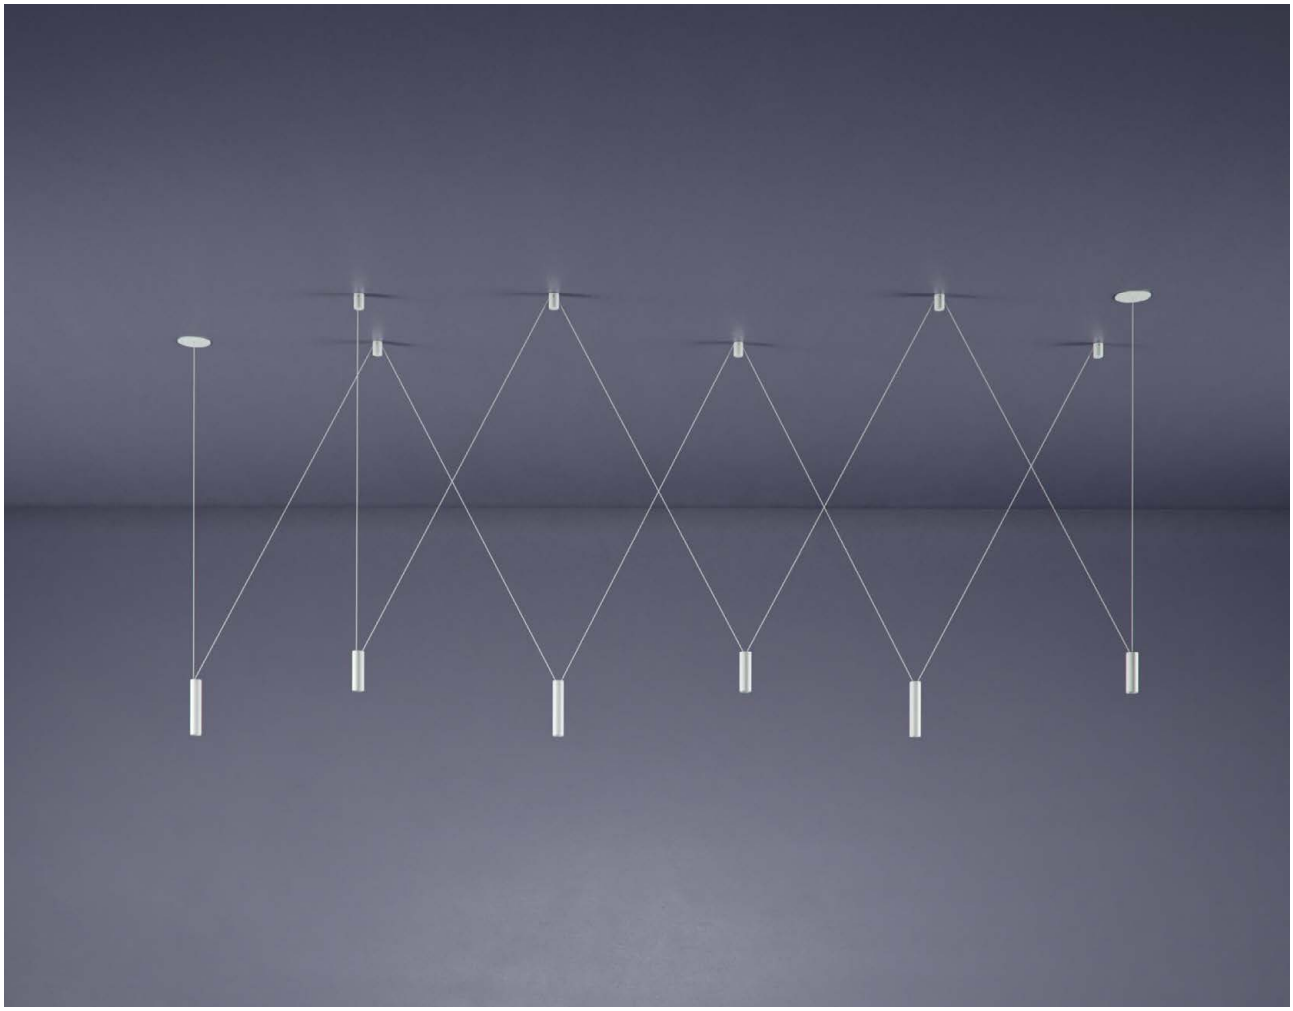

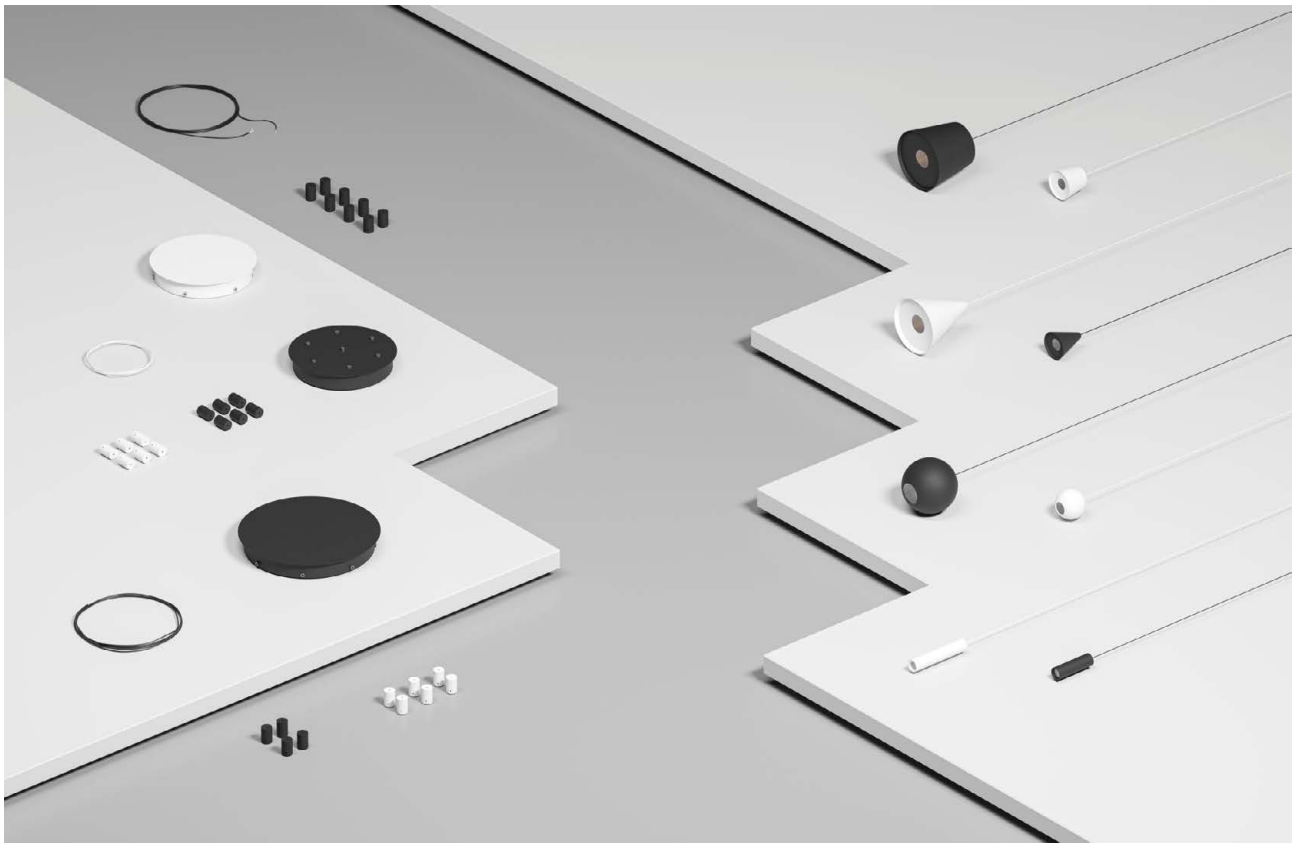


▶ VIDEO



## Nano Alp space






## Alp space






*Base not included. You need to choose a base to complete the instalation.

## Technical Information

| | | |
|---|---|---|
| Power | 5W | 5W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 370 lm | 370 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| V / I in | 20-42VDC/120mA | 20-42VDC/120mA |

| Code | | |
|---|---|---|
| | ○ 5096 | ○ 5098 |
| | ● 5097 | ● 5099 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Nano surface base
Ø75x33mm
○ 5114
● 5115



Nano recessed base
Ø90x22mm / Ø80mm
○ 5116
● 5117



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EAC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/ front base | 45° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/60



| Bora space | Bora XL space |
|---|---|

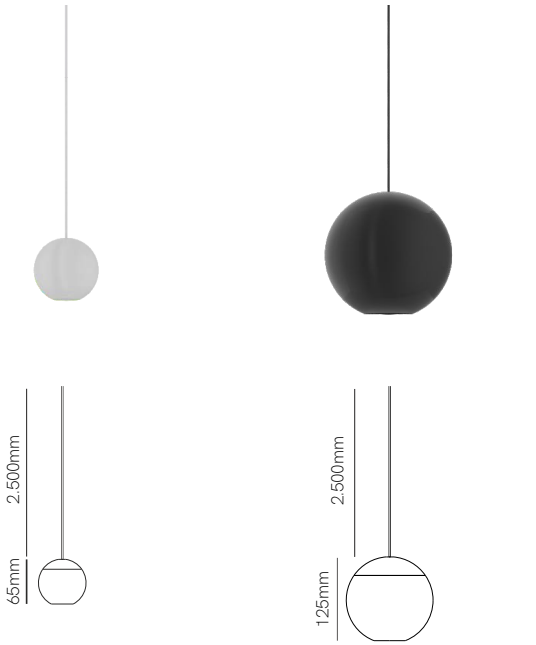


*Base not included.
You need to choose a base to complete the instalation.

## Technical Information

| | Bora space | Bora XL space |
|---|---|---|
| Power | 8W | 15W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm | 1.100 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| V / I in | 20-55VDC/150mA | 20-42VDC/350mA |

| Code | | |
|---|---|---|
| | ○ 5084 | ○ 5086 |
| | ● 5085 | ● 5087 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/30 | 1/20 |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH



## Lievo space






## Lievo XL space






*Base not included.
You need to choose a base to complete the instalation.

## Technical Information

| | | |
|---|---|---|
| Power | 8W | 15W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm | 1.100 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| V / I in | 20-55VDC/150mA | 20-42VDC/350mA |

| Code | | |
|---|---|---|
| | ○ 5088 | ○ 5090 |
| | ● 5089 | ● 5091 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/30 | 1/12 |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH | 1/20



## Zoe space






## Zoe XL space






*Base not included.
You need to choose a base to complete the instalation.

## Technical Information

| | | |
|---|---|---|
| Power | 8W | 15W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 570 lm | 1.100 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |
| V / I in | 20-55VDC/150mA | 20-42VDC/350mA |

| Code | | |
|---|---|---|
| | △ 5092 | △ 5094 |
| | ▲ 5093 | ▲ 5095 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/30 | 1/12 |

ⓘ Consult delivery terms and conditions.

## Accessories



Surface Base
Ø75x33mm
○ 5118 (8W)
● 5119 (8W)
○ 5122 (15W)
● 5123 (15W)



Recessed Base
Ø90x22mm / Ø80mm
○ 5120 (8W)
● 5121 (8W)
○ 5124 (15W)
● 5125 (15W)



Holder space
○ 5106
● 5107



Wire space (1m)
○ 5128
● 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm

CE RoHS EMC

*See pages 507 and 509 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | Nano base | Side/front base | 38° | 50/60 Hz | +45°C -20°C | CCT SWITCH





Space - Side base

# Side base

## Base Ø250x41mm



| Code | |
|---|---|
| Code | **S1** |

| Product | |
|---|---|
| Bora | **1** |
| Zoe | **3** |
| Lievo | **5** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ○ White | **1** |
| ● Black | **2** |
| ⓘ Custom RAL | |

Code: **S1**

## Base Ø280x41mm



| Code | |
|---|---|
| Code | **S2** |

| Product | |
|---|---|
| Bora | **1** |
| Zoe | **3** |
| Lievo | **5** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ○ White | **1** |
| ● Black | **2** |
| ⓘ Custom RAL | |

Code: **S2**

## Base Ø330x41mm



| Code | |
|---|---|
| Code | **S3** |

| Product | |
|---|---|
| Bora | **1** |
| Bora XL | **2** |
| Zoe | **3** |
| Zoe XL | **4** |
| Lievo | **5** |
| Lievo XL | **6** |
| Alp | **7** |
| Nano Alp | **8** |

| Units | |
|---|---|
| 2 units | **2** |
| 3 units | **3** |
| 4 units | **4** |
| 5 units | **5** |
| 6 units | **6** |
| 7 units | **7** |
| 8 units | **8** |

| Driver | |
|---|---|
| On / Off | **1** |
| Dali | **2** |
| Triac | **3** |
| Casambi | **5** |

| Color | |
|---|---|
| ○ White | **1** |
| ● Black | **2** |
| ⓘ Custom RAL | |

Code: **S3**

ⓘ Consult delivery terms and conditions.

## Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1





Space - Front base

# Front base

## Base Ø250x41mm



| Code | | Product | | Units | | Driver | | Color | |
|---|---|---|---|---|---|---|---|---|---|
| Code | F1 | Bora | 1 | 2 units | 2 | On / Off | 1 | White | 1 |
| | | Zoe | 3 | 3 units | 3 | Dali | 2 | Black | 2 |
| | | Lievo | 5 | 4 units | 4 | Triac | 3 | ⓘ Custom RAL | |
| | | Alp | 7 | 5 units | 5 | Casambi | 5 | | |
| | | Nano Alp | 8 | 6 units | 6 | | | | |

Code: F1

## Base Ø280x41mm



| Code | | Product | | Units | | Driver | | Color | |
|---|---|---|---|---|---|---|---|---|---|
| Code | F2 | Bora | 1 | 2 units | 2 | On / Off | 1 | White | 1 |
| | | Zoe | 3 | 3 units | 3 | Dali | 2 | Black | 2 |
| | | Lievo | 5 | 4 units | 4 | Triac | 3 | ⓘ Custom RAL | |
| | | Alp | 7 | 5 units | 5 | Casambi | 5 | | |
| | | Nano Alp | 8 | 6 units | 6 | | | | |

Code: F2

## Base Ø330x41mm



| Code | | Product | | Units | | Driver | | Color | |
|---|---|---|---|---|---|---|---|---|---|
| Code | F3 | Bora | 1 | 2 units | 2 | On / Off | 1 | White | 1 |
| | | Zoe | 3 | 3 units | 3 | Dali | 2 | Black | 2 |
| | | Lievo | 5 | 4 units | 4 | Triac | 3 | ⓘ Custom RAL | |
| | | Alp | 7 | 5 units | 5 | Casambi | 5 | | |
| | | Nano Alp | 8 | 6 units | 6 | | | | |
| | | | | 7 units | 7 | | | | |
| | | | | 8 units | 8 | | | | |

Code: F3

## Base Ø330x41mm



| Code | | Product | | Units | | Driver | | Color | |
|---|---|---|---|---|---|---|---|---|---|
| Code | F3 | Bora XL | 2 | 2 units | 2 | On / Off | 1 | White | 1 |
| | | Zoe XL | 4 | 3 units | 3 | Dali | 2 | Black | 2 |
| | | Lievo XL | 6 | | | Triac | 3 | ⓘ Custom RAL | |
| | | | | | | Casambi | 5 | | |

Code: F3

ⓘ Consult delivery terms and conditions.

## Accessories



Holder space
○ 5106
● 5107



Wire space (1m). Max. length 6m
○ 5128
● 5129

CE RoHS

*Create your code acording to your preferences. For other finishing please consult.

3 YEARS WARRANTY | IP 20 | 220/240 VAC | PF >0,9 | 50/60 Hz | TRIAC DIMM | DALI 2 | 1

SUSPENSION



## Ark suspension surface






## Ark suspension recessed






## Technical Information

| | Ark suspension surface | Ark suspension recessed |
|---|---|---|
| Power | 6W | 6W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 350 lm / 360 lm | 350 lm / 360 lm |
| Material | Aluminium and acrylic | Aluminium and acrylic |
| Finishes | White-transparent / Black-transparent / Black-gray | White-transparent / Black-transparent / Black-gray |

| Code | | |
|---|---|---|
| | 4814 White-transp. 2.700K | 4808 White-transp. 2.700K |
| | 4815 White-transp. 3.000K | 4809 White-transp. 3.000K |
| | 4816 Black-transp. 2.700K | 4810 Black-transp. 2.700K |
| | 4817 Black-transp. 3.000K | 4811 Black-transp. 3.000K |
| | 4818 Black-gray 2.700K | 4812 Black-gray 2.700K |
| | 4819 Black-gray 3.000K | 4813 Black-gray 3.000K |

CE RoHS EMC

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 90° | 50/60 Hz | +40°C -20°C | 1/12



## Atmos slim suspension






## Atmos slim XL suspension



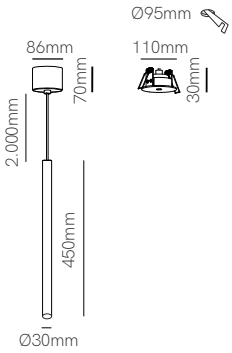


*Need Tuya Smart App to work.

## Technical Information

| | Atmos slim suspension | Atmos slim XL suspension |
|---|---|---|
| Power | 6W | 6W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Tuya 2.700K - 4.000K | Tuya 2.700K - 4.000K |
| Lumens | 460 lm | 460 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |

| Code | | |
|---|---|---|
| | ○ 4930 | ○ 4750 |
| | ● 4931 | ● 4751 |
| | ○ 4932 | ○ 4752 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi
☐ 4956

CE RoHS

*See page 292 for Gateway additional info.
*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C -10°C | IK03 | tuya | 1/10



## Atmos suspension






## Atmos XL suspension



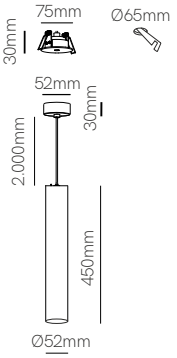


## Technical Information

| | Atmos suspension | Atmos XL suspension |
|---|---|---|
| Power | 7W | 10W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 770 lm | 1.100 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |

| Code | | |
|---|---|---|
| | ○ 4461 | ○ 4463 |
| | ● 4462 | ● 4464 |
| | ○ 4952 | ○ 4953 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/8 | 1/4 |

ⓘ Consult delivery terms and conditions.

## Accessories



Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464

CE RoHS EMC

*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH


bauhaus
CHANEL
CHANEL
Velázquez
Vermeer
CHANEL
TOM FORD

## Atmos GU10 suspension



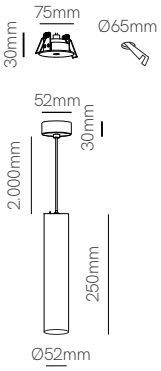


## Atmos GU10 XL suspension



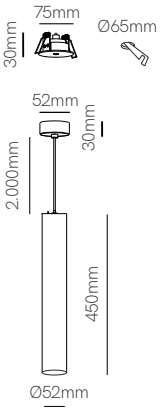


*All versions included surface base (mounted) and recessed base (not mounted).

## Technical Information

| | | |
|---|---|---|
| Installation | Surface / Recessed | Surface / Recessed |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome | White / Black / Chrome |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) |

| Code | | |
|---|---|---|
| | ○ 4465 | ○ 4467 |
| | ● 4466 | ● 4468 |
| | ◌ 4954 | ◌ 4955 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/8 | 1/4 |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 220/240 VAC |



Alexis Baudin restaurant, Malling (France). Architecture: XXI LOUUIS STUDIO. Photography: ACTE Photographique.

## Zoe suspension surface






## Zoe suspension recessed






## Technical Information

| | Zoe suspension surface | Zoe suspension recessed |
|---|---|---|
| Power | 7W | 7W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 360 lm / 370 lm | 360 lm / 370 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | △ | 2.700K | 4803 | △ | 2.700K | 4799 |
| | △ | 3.000K | 4804 | △ | 3.000K | 4800 |
| | ▲ | 2.700K | 4805 | ▲ | 2.700K | 4801 |
| | ▲ | 3.000K | 4806 | ▲ | 3.000K | 4802 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 38° | 50/60 Hz | +40°C -20°C | 1/36


▶ VIDEO

New

### Mini Hat suspension surface



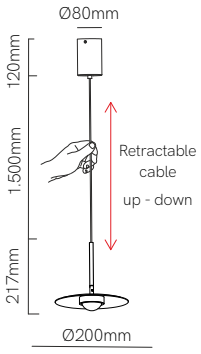


New

### Mini Hat suspension recessed



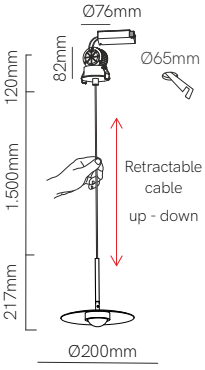


### Hat suspension surface



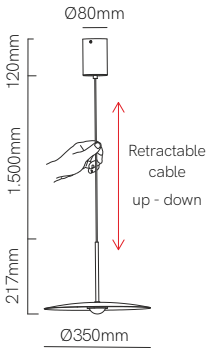


### Hat suspension recessed



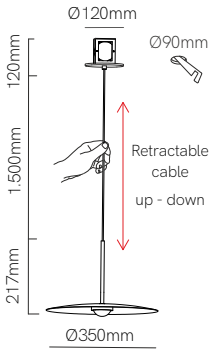


## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 8W | 8W | 8W | 8W |
| Installation | Surface | Recessed | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 800lm | 800lm | 835 lm | 835 lm |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black | White / Black |

| Code | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5710 | ○ | 2.700K | 5706 | ○ | 2.700K | 5345 | ○ | 2.700K | 5351 |
| | ○ | 3.000K | 5712 | ○ | 3.000K | 5708 | ○ | 3.000K | 5346 | ○ | 3.000K | 5352 |
| | ● | 2.700K | 5711 | ● | 2.700K | 5707 | ● | 2.700K | 5348 | ● | 2.700K | 5354 |
| | ● | 3.000K | 5713 | ● | 3.000K | 5709 | ● | 3.000K | 5349 | ● | 3.000K | 5355 |
| | 70° | | 1/10 | 70° | | 1/10 | 83° | | 1/5 | 83° | | 1/5 |

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,6 | CRI ≥90 | 50/60 Hz | +40°C -20°C



## Bora suspension surface






## Bora suspension recessed






## Technical Information

| | Bora suspension surface | Bora suspension recessed |
|---|---|---|
| Power | 8,5W | 8,5W |
| Installation | Surface | Recessed |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 530 lm / 540 lm | 530 lm / 540 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Chrome / Rose gold | White / Black / Chrome / Rose gold |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 4605 | ○ | 2.700K | 4613 |
| | ○ | 3.000K | 4606 | ○ | 3.000K | 4614 |
| | ● | 2.700K | 4607 | ● | 2.700K | 4615 |
| | ● | 3.000K | 4608 | ● | 3.000K | 4616 |
| | ● | 2.700K | 4609 | ● | 2.700K | 4617 |
| | ● | 3.000K | 4610 | ● | 3.000K | 4618 |
| | ● | 2.700K | 4611 | ● | 2.700K | 4619 |
| | ● | 3.000K | 4612 | ● | 3.000K | 4620 |

CE RoHS

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C -20°C | 1/18



## Cookie suspension base



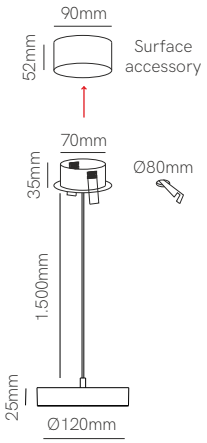


*Includes surface and recessed base.

## Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 985 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 5183 |
| | ● 5184 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/20



## Tot suspension / surface

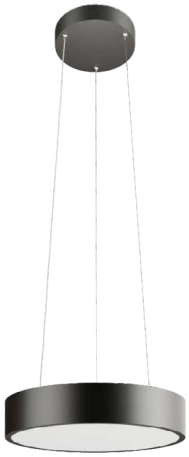

## Tot XL suspension / surface

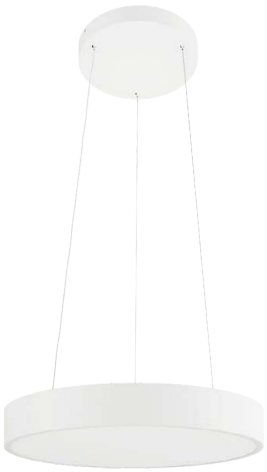




Surface




Suspension




Suspension




Surface



*Need Tuya Smart App to work.

## Technical Information

| | | |
|---|---|---|
| Power | 40W | 60W |
| Installation | Surface / Pendant | Surface / Pendant |
| Color Temperature | Tuya 2.600K - 4.000K | Tuya 2.600K - 4.000K |
| Lumens | 3.400 lm | 5.900 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black | White / Black |
| Code | ○ 4902 | ○ 4904 |
| | ● 4903 | ● 4905 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories



Gateway Wifi

☐ 4956

CE RoHS

*See page 292 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | +50°C -20°C | tuya | 1

SUSPENSION





# Wall

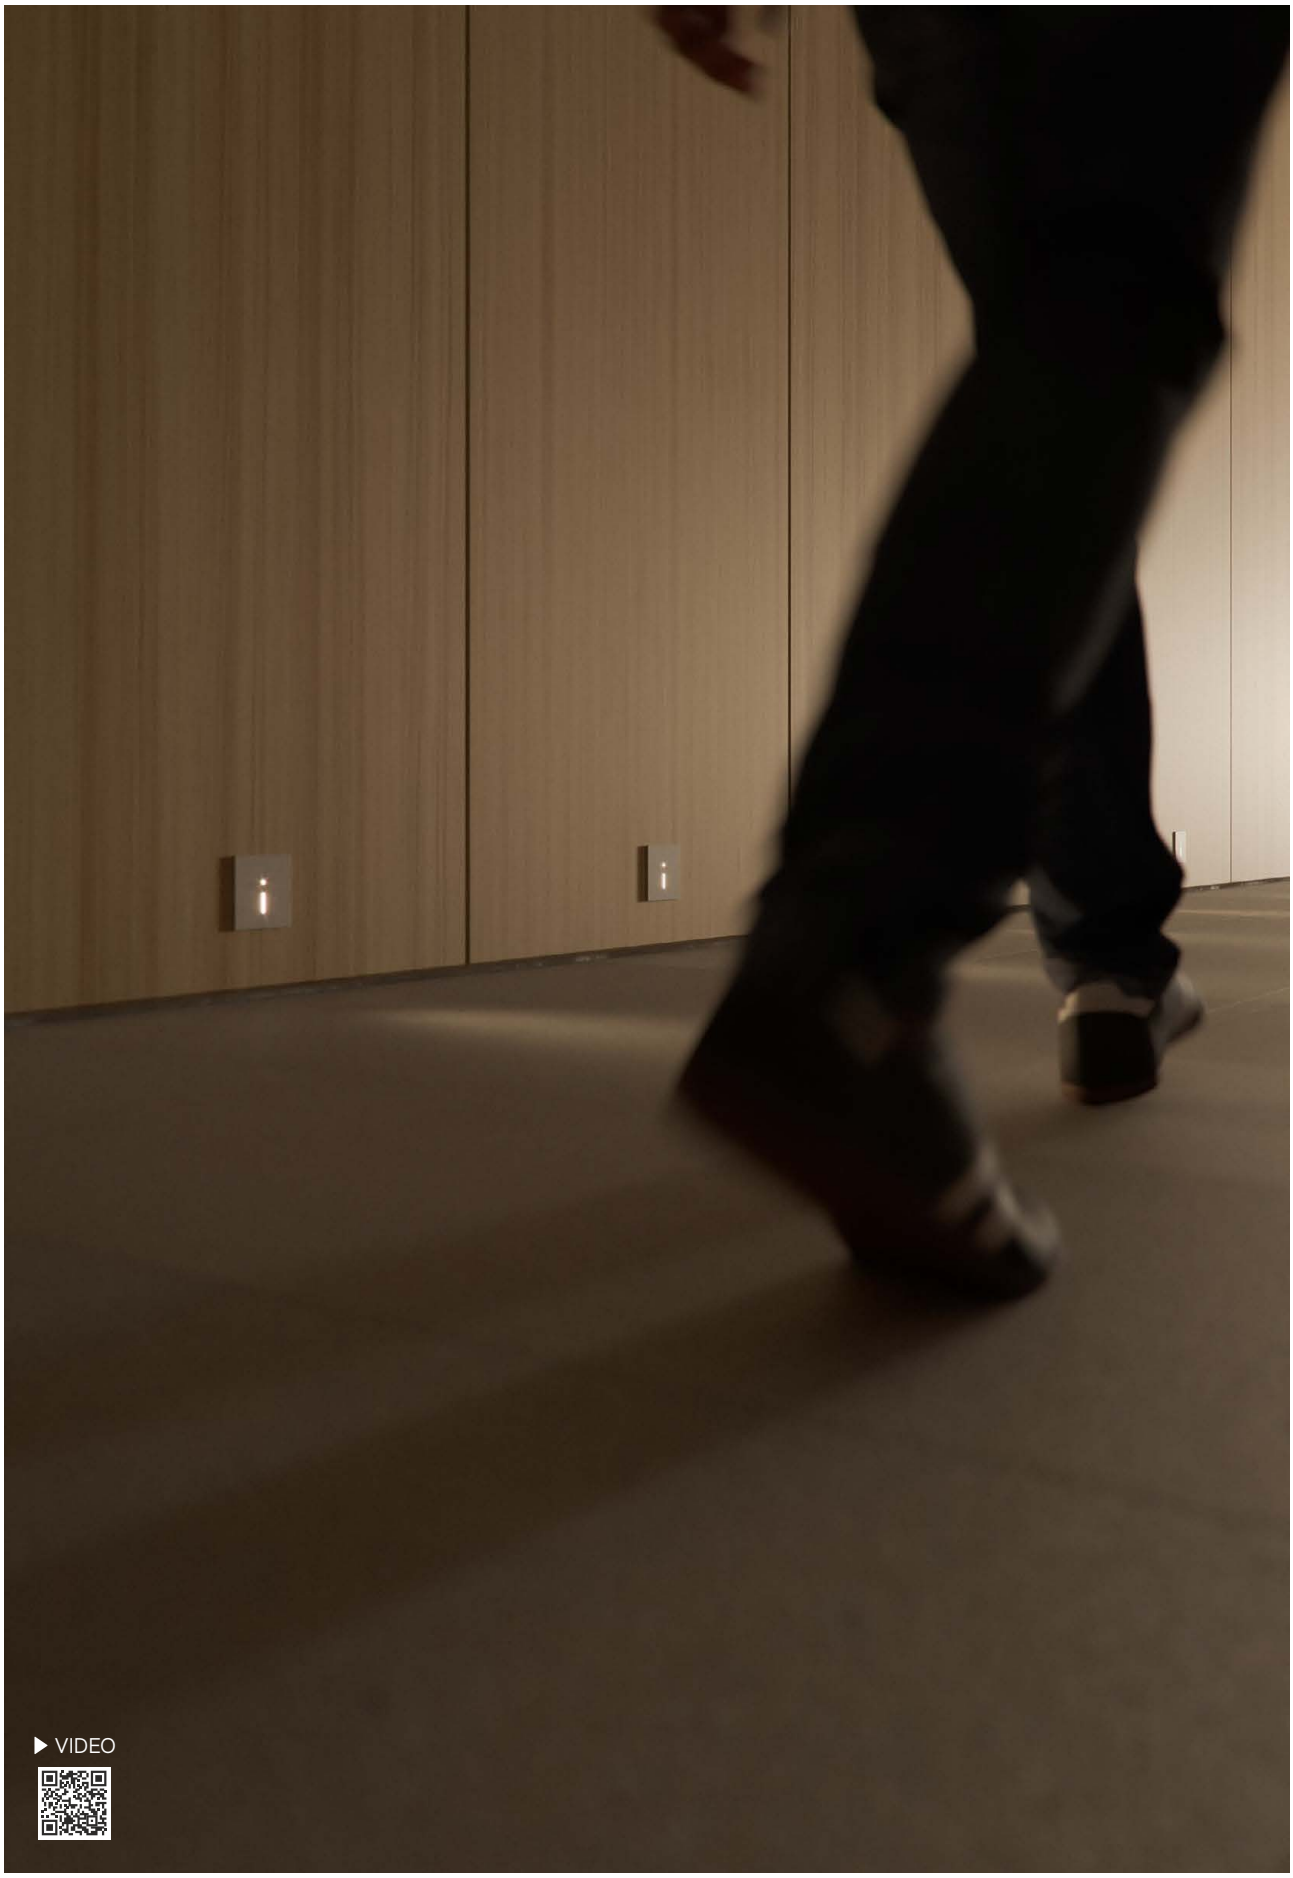
▶ VIDEO

## Lao











Recessed box included
66mm x Ø73mm



White and black cover included

*Recessed box, white and black cover included.

## Technical Information

| | |
|---|---|
| Power | 1,5W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 20 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ☐ ■ 5027 |
| | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 175/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | +45°C -20°C | 6 - 8m | ON OFF | OFF 30 sec | CCT SWITCH | 1/50

WALL



## Ilo









## Skin









*Recessed box included.

## Technical Information

| | Ilo | Skin |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 60 lm | 60 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ○ 4126 | □ 4108 |
| | ● 4127 | ■ 4109 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK07 | +50°C -20°C | 1/50

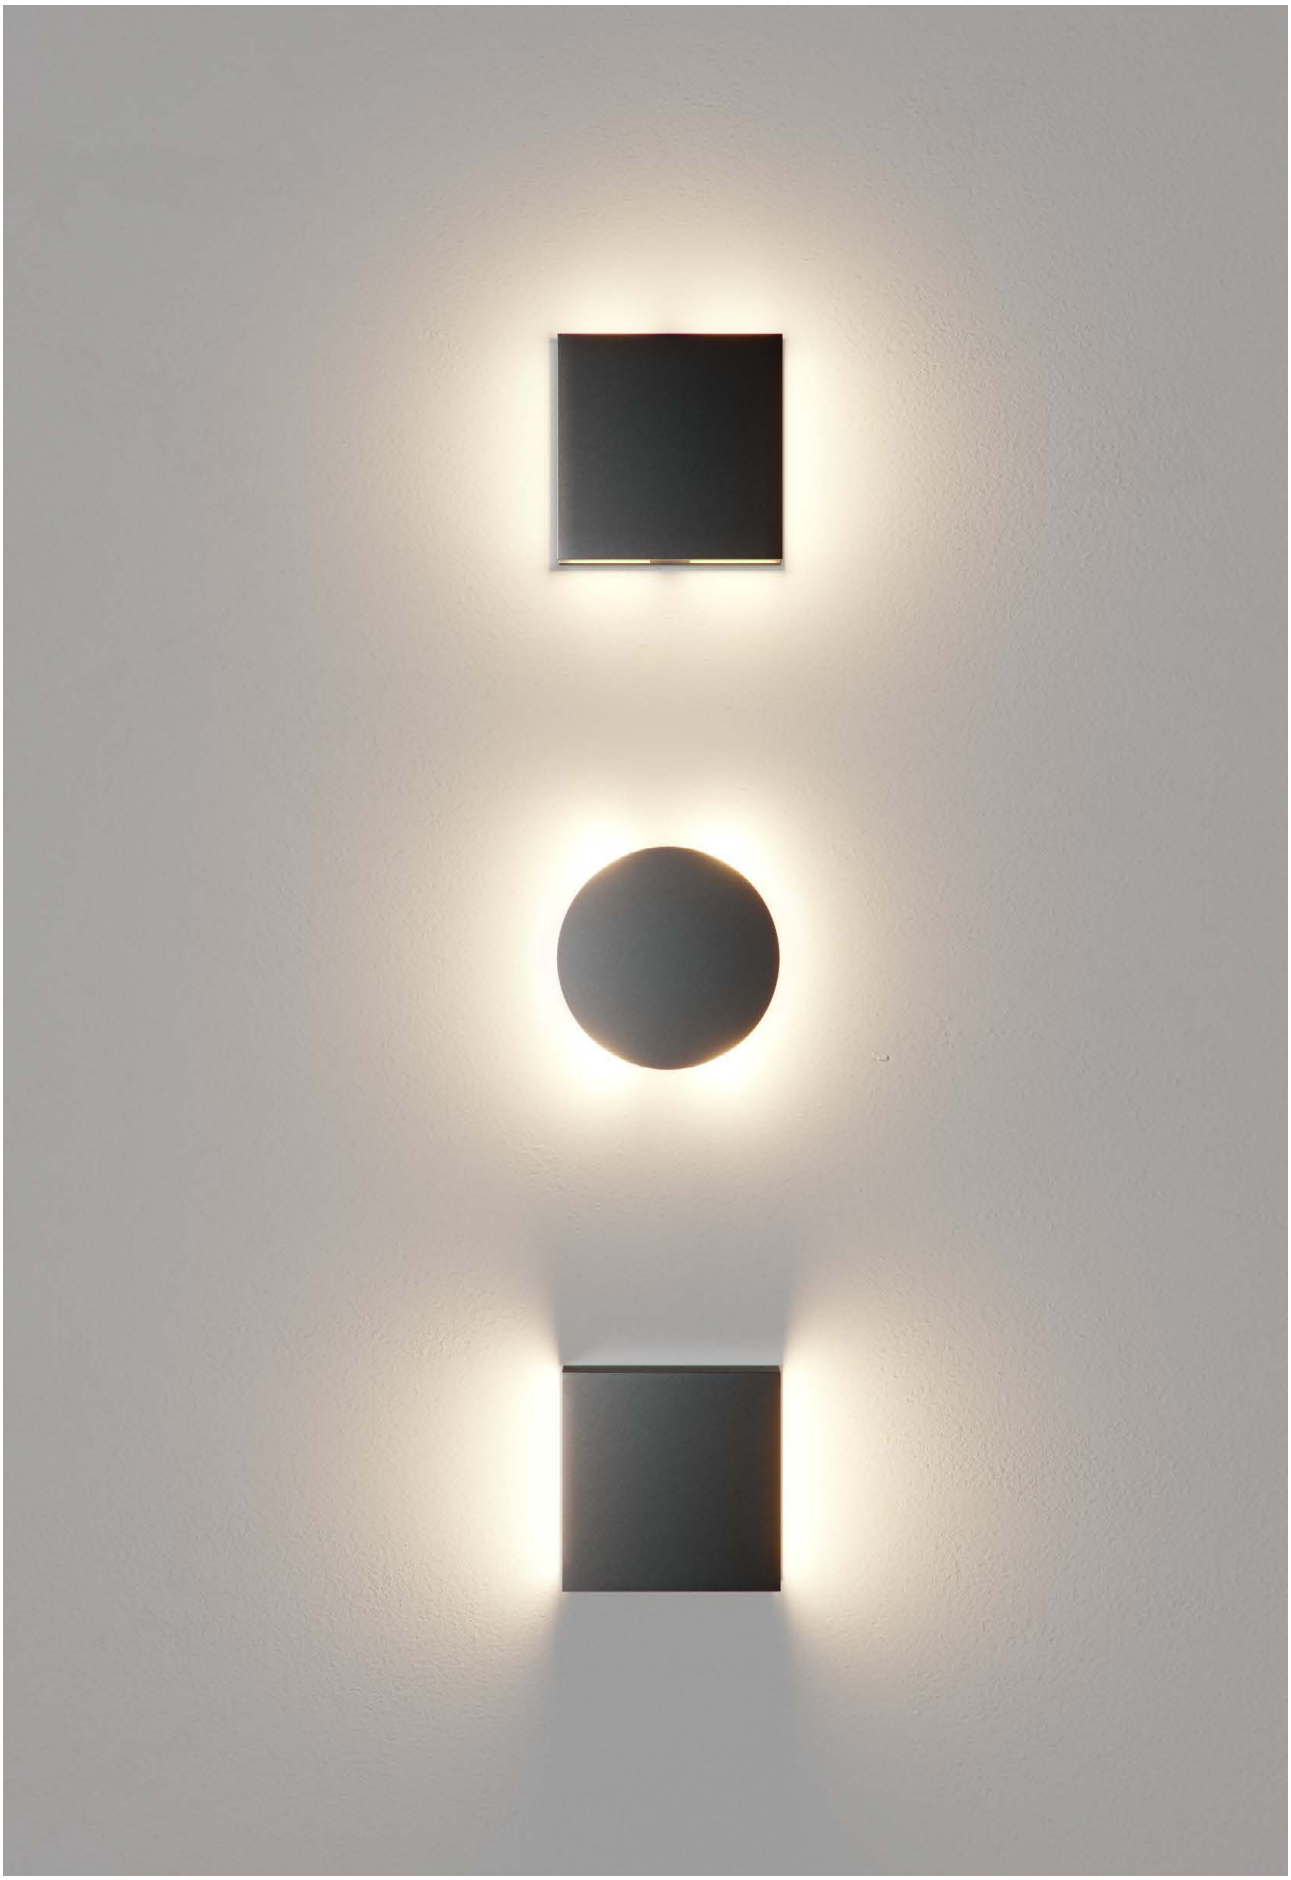

## Port









## Grow









## Steps









*Recessed box included.

## Technical Information

| | Port | Grow | Steps |
|---|---|---|---|
| Power | 4W | 4W | 4W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K | 3.000K |
| Lumens | 60 lm | 60 lm | 60 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |
| Code | ☐ 4112 | ○ 4106 | ☐ 4110 |
| | ■ 4113 | ● 4107 | ■ 4111 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | 120° ☐ | 120° ○ | 120° ☐ |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK07 | +50°C -20°C | 1/50

WALL



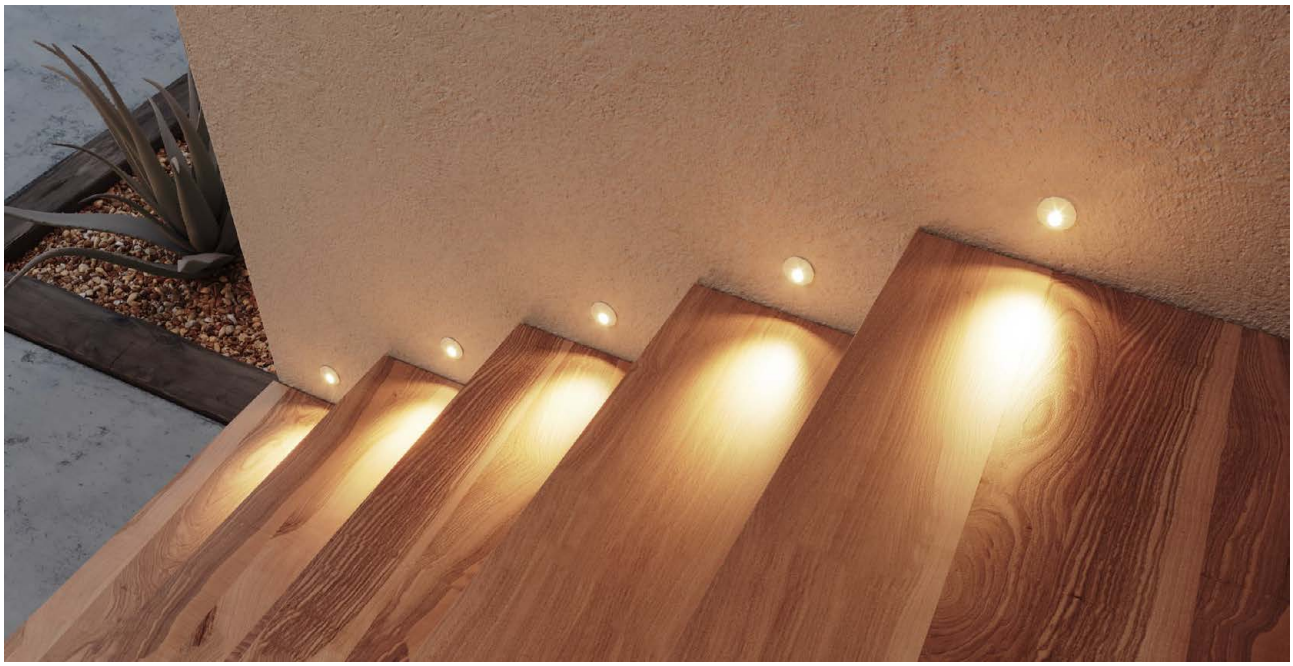

## Polo



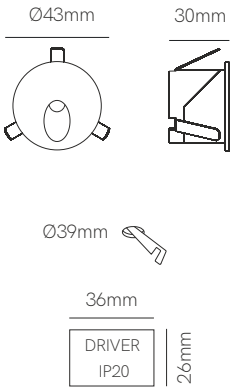


## Luky



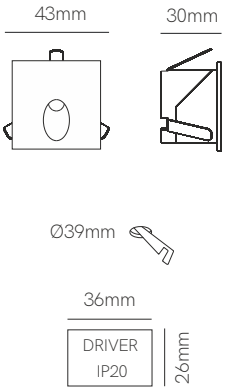


## Technical Information

| | Polo | Luky |
|---|---|---|
| Power | 2W | 2W |
| Installation | Recessed | Recessed |
| Color Temperature | 3.200K / 4.000K | 3.200K / 4.000K |
| Lumens | 90 lm / 96 lm | 90 lm / 96 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | |
|---|---|---|---|---|---|
| | ○ | 3.200K | 3995 | □ | 3.200K 3999 |
| | ○ | 4.000K | 3996 | □ | 4.000K 4000 |
| | ● | 3.200K | 3997 | ■ | 3.200K 4001 |
| | ● | 4.000K | 3998 | ■ | 4.000K 4002 |
| ⓘ | | Custom RAL | | ⓘ | Custom RAL |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 50.000 HOURS | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C -20°C | AKZO NOBEL | 1/200





## Ina








## Dis








## Nix








## Technical Information

| | Ina | Dis | Nix |
|---|---|---|---|
| Power | 2W | 2W | 2W |
| Installation | Recessed | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K | 3.000K |
| Lumens | 55 lm | 55 lm | 55 lm |
| Material | Inox 304 | Inox 304 | Inox 304 |
| Finishes | Brushed Inox | Brushed Inox | Brushed Inox |
| Code | 4367 | 4368 | 4369 |
| | 1.000Kg | 1.000Kg | 1.000Kg |

## Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 50/60 Hz | IK09 | +50°C -20°C | 1/50

WALL



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

## Mis r wall






## Mis sq wall






## Technical Information

| | Mis r wall | Mis sq wall |
|---|---|---|
| Power | 3W | 3W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 200 lm | 140 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | Mis r wall | Mis sq wall |
|---|---|---|
| | ○ 5020 | □ 5023 |
| | ● 5021 | ■ 5024 |
| | ● 5022 | ■ 5025 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

*Integrated driver.
ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,5 | CRI ≥80 | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10/50

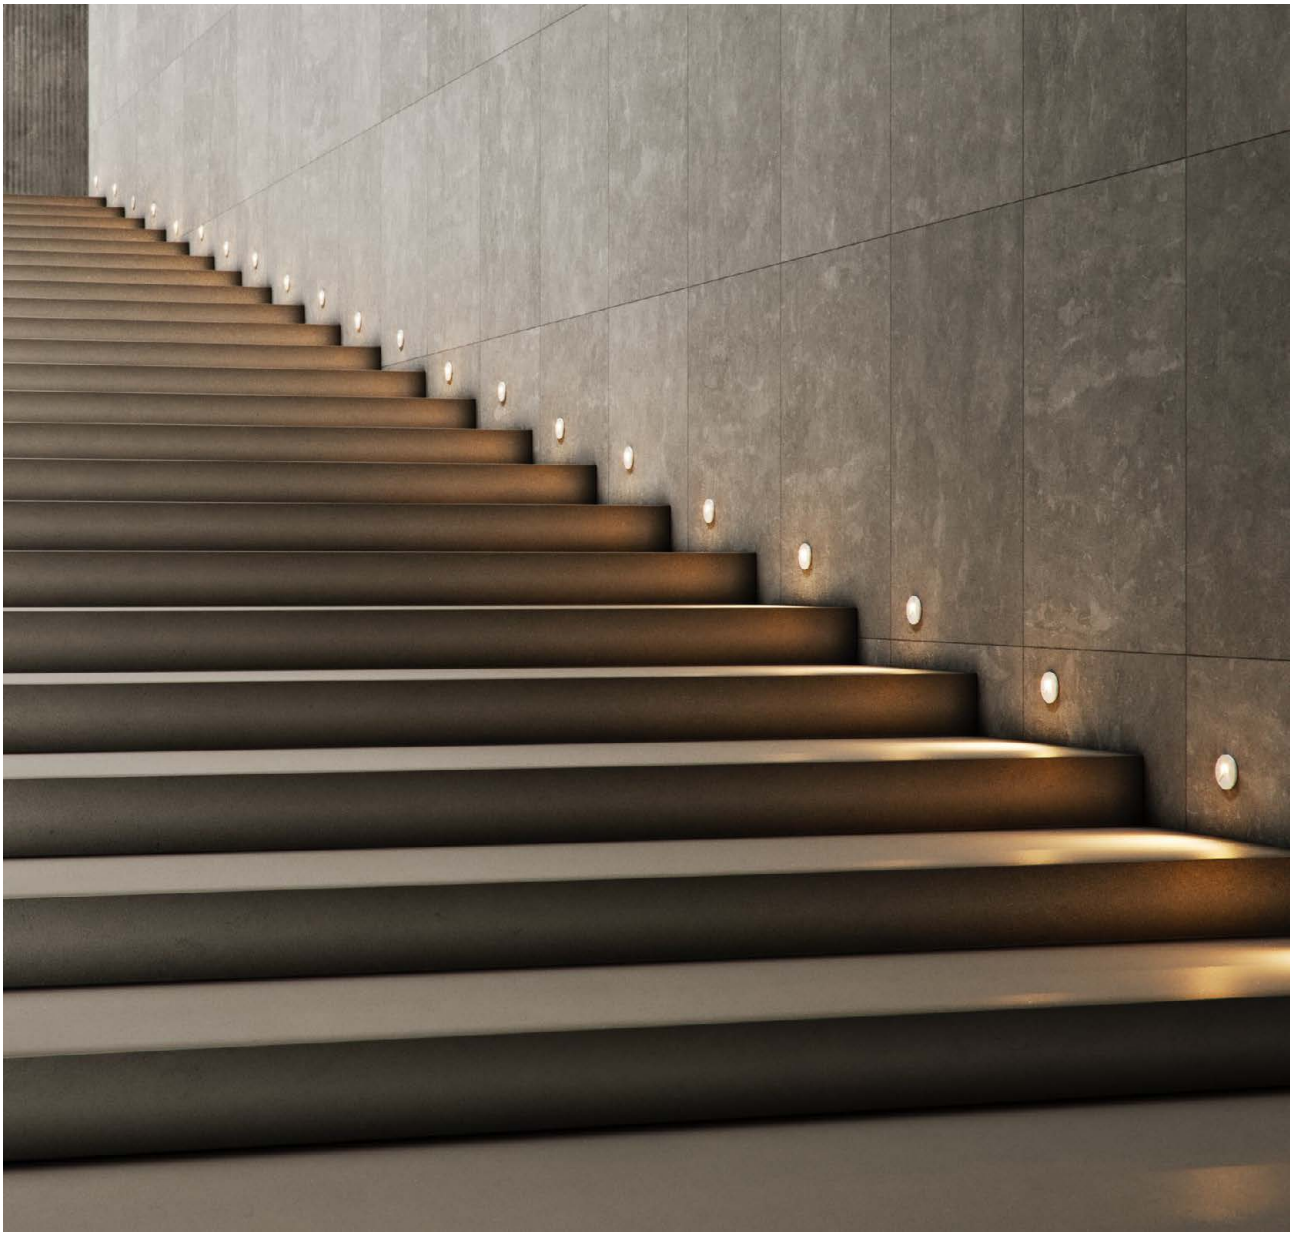



## Pun











Recessed box included
66mm x Ø73mm



White and black cover included

## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 65 lm |
| Material | Aluminium |
| Finishes | White / Black |

| | |
|---|---|
| Code | ○ ● 5029 |
| ⓘ | Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 85/265 VAC | PF >0,4 | CRI ≥80 | 38° | 50/60 Hz | IK07 | +45°C -20°C | CCT SWITCH | 1/50



## Artis r wall








Recessed box included
67mm x Ø74mm



Surface box included
54mm x Ø80mm

## Artis sq wall








Recessed box included
107mm x 73mm x 53mm



Surface box included
103mm x 79mm x 57 mm

## Technical Information

| | Artis r wall | Artis sq wall |
|---|---|---|
| Power | 4,5W | 4,5W |
| Installation | Surface / Recessed | Surface / Recessed |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 130 lm | 130 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White | White |
| Code | ○ 5205 | □ 5028 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 66 | 175/265 VAC | PF >0,5 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +50°C -20°C | CCT SWITCH | 1/20



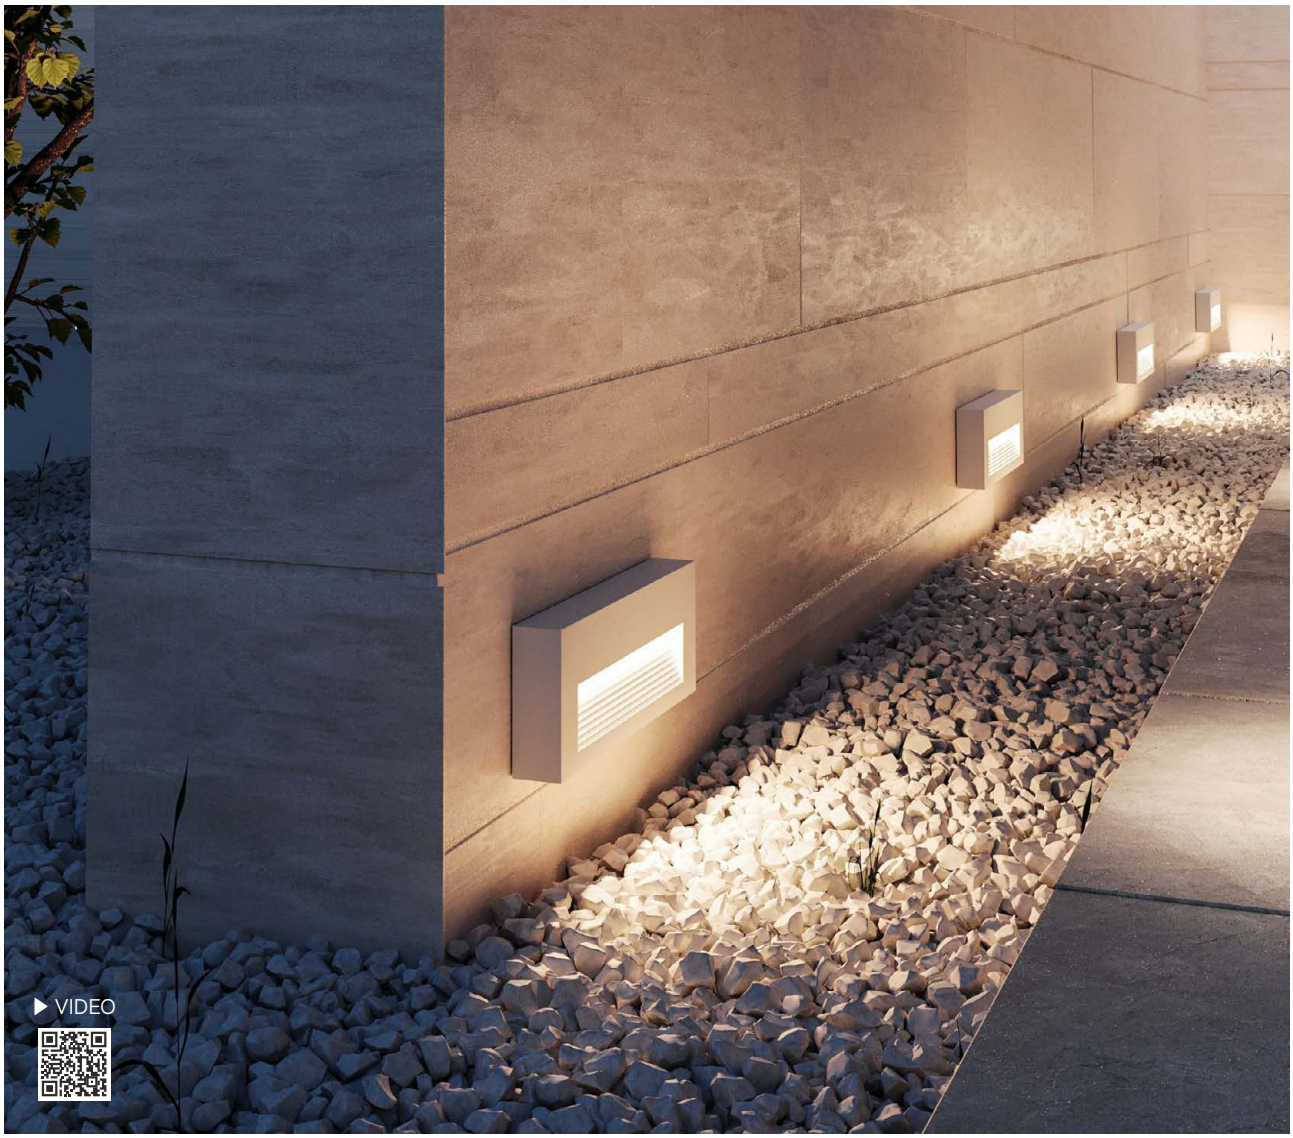
▶ VIDEO

## Tween recessed












Recessed box included

## Tween surface






## Technical Information

| | Tween recessed | Tween surface |
|---|---|---|
| Power | 5W | 5W |
| Installation | Recessed | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 360 lm | 360 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | Tween recessed | Tween surface |
|---|---|---|
| | ☐ 5199 | ☐ 5196 |
| | ■ 5200 | ■ 5197 |
| | ■ 5201 | ■ 5198 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/50

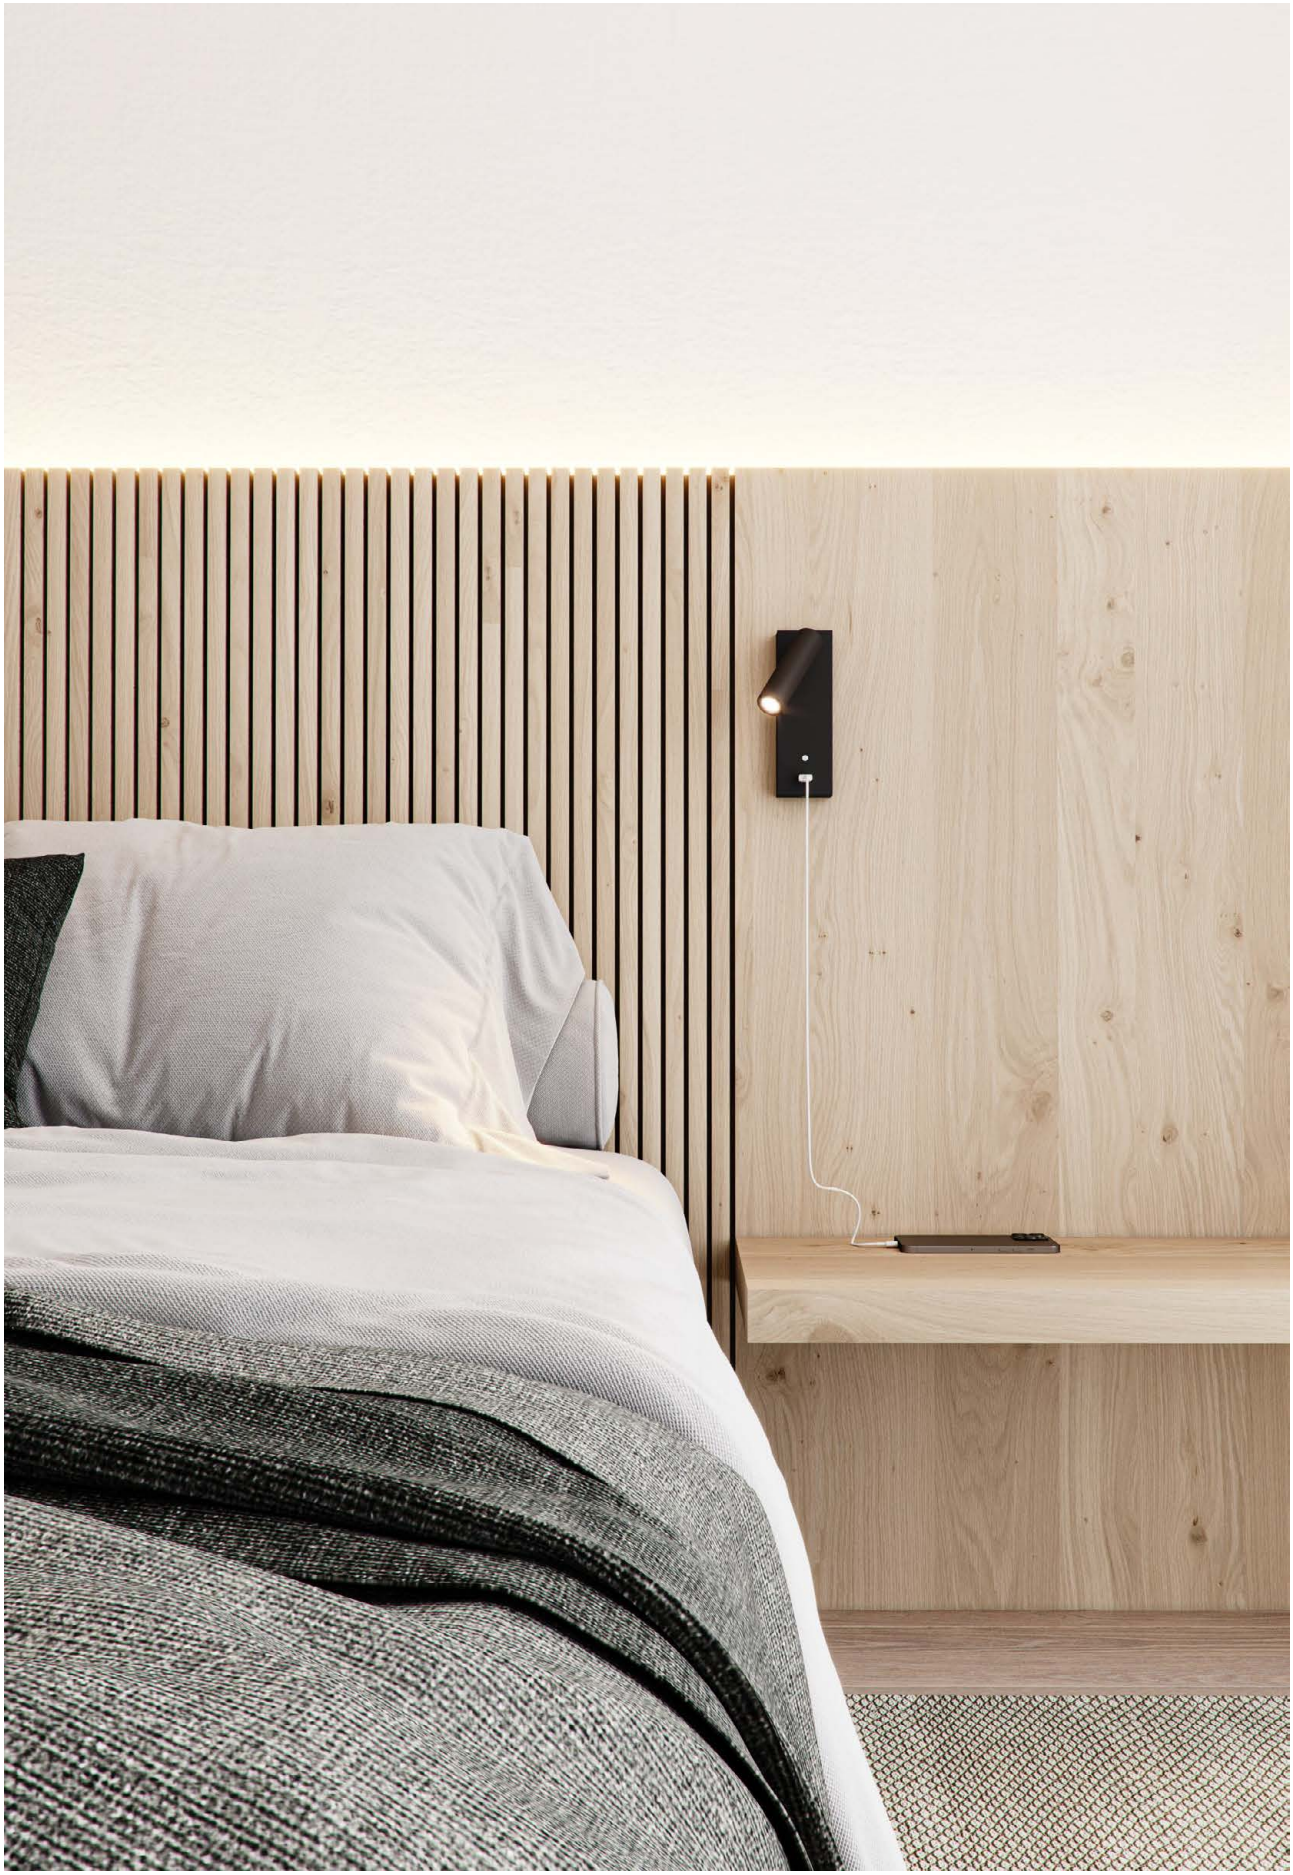

## Pure wall






*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

## Technical Information

| | |
|---|---|
| Power | 4W |
| Installation | Surface |
| Color Temperature | 2.700K |
| Lumens | 155 lm / 80 lm / 40 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5159 |
| | ■ 5160 |

CE RoHS

*Charger by USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | USB-C 5V 2A | CRI ≥90 | 30° | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/20



## Sweet wall






## Sweet usb-a






*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

## Technical Information

| | | |
|---|---|---|
| Power | 4W | 4W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K | 2.700K |
| Lumens | 150 lm / 90 lm / 40 lm | 150 lm / 90 lm / 40 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | Black |
| Code | ☐ 5155 | ■ 4175 |
| | ■ 5156 | |
| | USB-C 5V 2A \| CRI ≥90 | USB-A 5V 2A \| CRI ≥80 |

CE RoHS

*Charger by induction and USB.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,4 | 20° | 5W | 50/60 Hz | 3 INTENSITIES | +40°C -20°C | 1/10



## Beam wall









*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Surface |
| Color Temperature | 2.700K |
| Lumens | 380 lm / 190 lm / 95 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5157 |
| | ■ 5158 |

CE RoHS

*Charger by USB-C.

5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥90 | 40° | 50/60 Hz | USB-C 5V 2A | 3 INTENSITIES | +40°C -20°C | 1/12



| Mini Mac wall | Mac wall | Mac wall XL |
|---|---|---|
















*Included 33mm base, optional 53mm base.

## Technical Information

| | | | |
|---|---|---|---|
| Power | 6W | 15W | 20W |
| Installation | Surface | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm | 1.500 lm | 2.000 lm |
| Material | Aluminium + pc / Pc (wood) | Aluminium + pc / Pc (wood) | Aluminium + pc / Pc (wood) |
| Finishes | White / Black / Wood / Corten | White / Black / Wood / Corten | White / Black / Wood / Corten |

| Code | | | |
|---|---|---|---|
| | ○ 4995 | ○ 4998 | ○ 5001 |
| | ● 4996 | ● 4999 | ● 5002 |
| | 4997 | 5000 | 5003 |
| | 5218 | 5219 | 5220 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |

ⓘ Consult delivery terms and conditions.

## Accessories

53mm



Mini mac base

○ 5226 ○ 5228
● 5227 ● 5229

53mm



Mac base

○ 5230 ○ 5232
● 5231 ● 5233

53mm



Mac XL base

○ 5234 ○ 5236
● 5235 ● 5237




CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | IK06 | TRIAC DIMM | +40°C -20°C | CCT SWITCH | 1/10



## Mac wall base






### Technical Information

| | |
|---|---|
| Power | 12W |
| Installation | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.020 lm |
| Material | Aluminium and Polycarbonate |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | ○ 5264 |
| | ● 5265 |
| | ● 5266 |

### Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/6




▶ VIDEO

New

## Lek sensor



Battery powered

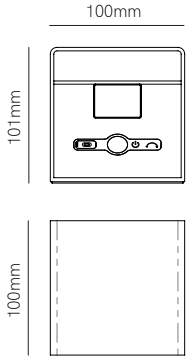


## Technical Information

| | |
|---|---|
| Power | 6W |
| Installation | Surface |
| Color Temperature | 3.000K |
| Lumens | 358 lm |
| Material | Aluminium |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | 5666 |
| | 5667 |
| | 5668 |

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 30.000 HOURS | 5 HOURS | 4-24 HOURS | USB-C 5V | 4.400 mAh | IP 54 | CRI ≥80 | 100° | IK05 | DIMMABLE | +45°C +10°C | PIR SENSOR | 1/9





## Lek r wall






## Lek sq wall






## Technical Information

| | Lek r wall | Lek sq wall |
|---|---|---|
| Power | 6,8W | 6,8W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 480 lm / 530 lm / 542 lm | 480 lm / 530 lm / 542 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | | |
|---|---|---|---|---|---|
| | ○ | 2.700K | 4906 | □ 2.700K | 4303 |
| | ○ | 3.000K | 4907 | □ 3.000K | 3983 |
| | ○ | 4.000K | 4908 | □ 4.000K | 3984 |
| | ● | 2.700K | 4909 | ■ 2.700K | 4304 |
| | ● | 3.000K | 4910 | ■ 3.000K | 3985 |
| | ● | 4.000K | 4911 | ■ 4.000K | 3986 |
| | ● | 2.700K | 4912 | ■ 2.700K | 4312 |
| | ● | 3.000K | 4913 | ■ 3.000K | 3987 |
| | ● | 4.000K | 4914 | ■ 4.000K | 3988 |
| ⓘ | Custom RAL | | | ⓘ Custom RAL | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 54 | 220/240 VAC | PF >0,9 | CRI ≥80 | 0°-120° | 50/60 Hz | IK04 | +40°C -10°C | AKZO NOBEL | 1/12



## Mini Icon wall






## Icon wall






## Technical Information

| | | |
|---|---|---|
| Power | 7W | 12W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 770 lm | 1.320 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ☐ 4383 | ☐ 4386 |
| | ■ 4384 | ■ 4387 |
| | ■ 4385 | ■ 4388 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,5 | CRI ≥90 | 120° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/12



## Clos wall






## Clos wall dual






## Technical Information

| | Clos wall | Clos wall dual |
|---|---|---|
| Power | 8W | 16W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.000 lm | 2.100 lm |
| Material | Aluminium and polycarbonate | Aluminium and polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | Clos wall | Clos wall dual |
|---|---|---|
| | ○ 4876 | ○ 4879 |
| | ● 4877 | ● 4880 |
| | ● 4878 | ● 4881 |
| | 120° | 120° |

## Accessories (page 641)



Clos base mini
- ○ 4882
- ● 4883
- ● 4884



Clos dual base mini
- ○ 4888
- ● 4889
- ● 4890



Clos base
- ○ 4885
- ● 4886
- ● 4887



Clos dual base
- ○ 4891
- ● 4892
- ● 4893

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | IK08 | +40°C -25°C | CCT SWITCH | 1/20



## Neo






## Neo XL






## Technical Information

| | Neo | Neo XL |
|---|---|---|
| Power | 9W | 18W |
| Installation | Surface | Surface |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 1.640 lm / 1.650 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | Code | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 3747 | ☐ | 3.000K | 3890 |
| | ☐ | 4.000K | 3748 | ☐ | 4.000K | 3891 |
| | ■ | 3.000K | 3749 | ■ | 3.000K | 3892 |
| | ■ | 4.000K | 3750 | ■ | 4.000K | 3893 |
| | IP 54 \| 220/240 VAC \| PF >0,7 \| 1/12 | | | IP 65 \| 100/240 VAC \| PF >0,9 \| 1/4 | | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C

WALL



## Neo sensor






## Neo XL sensor






## Technical Information

| | Neo sensor | Neo XL sensor |
|---|---|---|
| Power | 9W | 18W |
| Installation | Surface | Surface |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 1.640 lm / 1.650 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ☐ | 3.000K | 3585 | ☐ | 3.000K | 3886 |
| | ☐ | 4.000K | 3583 | ☐ | 4.000K | 3887 |
| | ■ | 3.000K | 3584 | ■ | 3.000K | 3888 |
| | ■ | 4.000K | 3582 | ■ | 4.000K | 3889 |
| | 220/240 VAC \| PF >0,7 \| 1/12 | | | 100/240 VAC \| PF >0,9 \| 1/4 | | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | → | IP 54 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min





## Oma

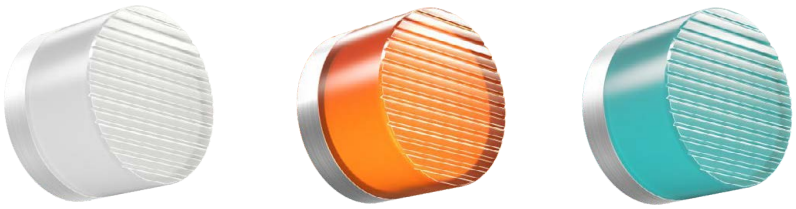




## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface |
| Color Temperature | Switch 2.000K / 2.800K / 4.000K |
| Lumens | ○ 600lm / ● 440lm / ● 400lm |
| Material | Aluminium and methacrylate |
| Finishes | White / Amber / Turquoise |

| Code | |
|---|---|
| | ○ 5381 |
| | ● 5382 |
| | ● 5383 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥70-80 | 110° | 50/60 Hz | IK06 | +50°C -20°C | CCT SWITCH | 1/20



## Tron






### Technical Information

| | |
|---|---|
| Power | 5W / 8W / 16W / 24W |
| Installation | Surface |
| Color Temperature | 2.700K / 3.000K / 4.000K |
| Lumens | 300 lm - 2.400 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | Diffuser | | Size (X) | | | CCT (Lm/W) - Power/m | | Driver | | Colour | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Code | 9 | Opal | 7 | Nano tron | 140mm | New 0 | 2.700K (60 lm/W) - 29W/m | 2 | Triac | 4 | White (9003) | 1 |
| | | | | Mini tron | 290mm | 1 | 3.000K (65 lm/W) - 29W/m | 3 | | | Black (9005) | 2 |
| | | | | Tron | 590mm | 2 | 4.000K (70 lm/W) - 29W/m | 4 | | | Custom RAL | C |
| | | | | Tron XL | 870mm | 3 | | | | | | |

Code: 9 7 4

CE RoHS EMC

Consult delivery terms and conditions.
*Create your code acording to your preferences.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | 230 VAC | PF >0,9 | CRI ≥95 | 0,87m Max | TRIAC DIMM



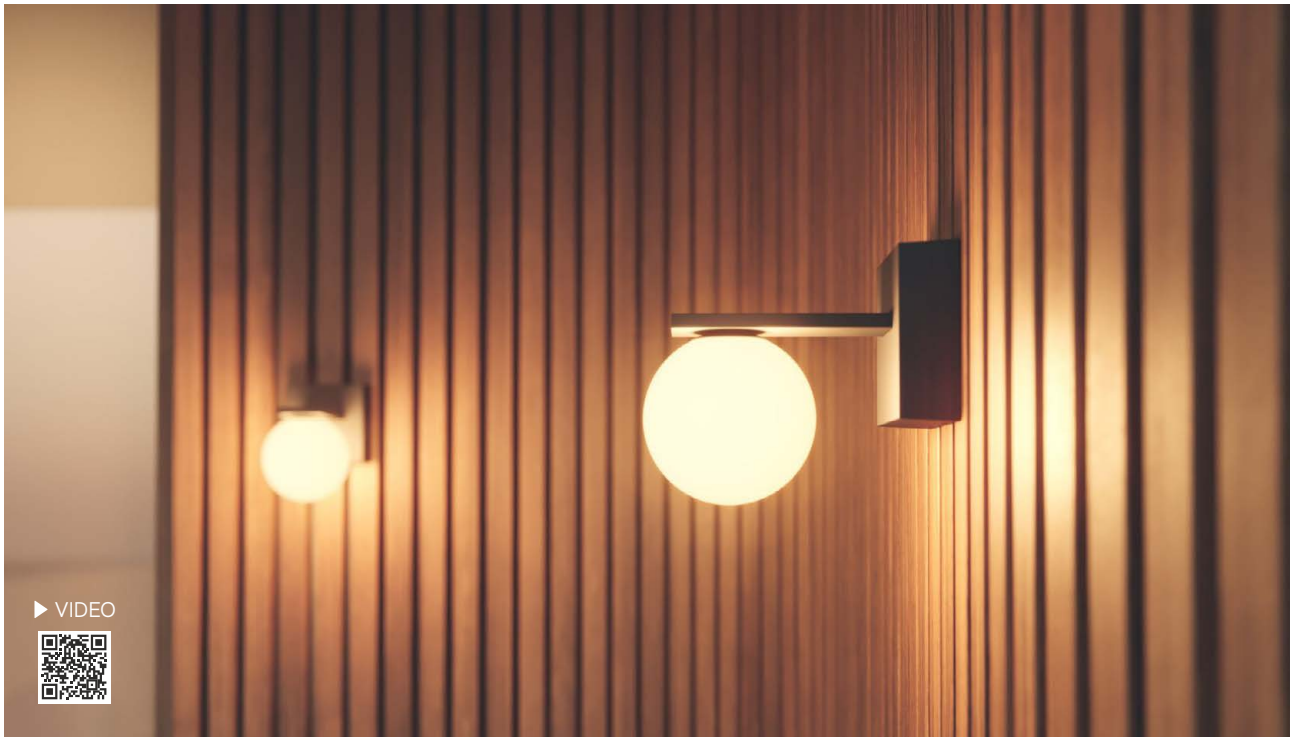
▶ VIDEO

## Sphere wall






## Sphere alp wall






Sphere wall

Sphere alp wall

*On IPHONE devices older than the EU2022/2380 directive, or with outdated software, the device may not recognize the charger.

## Technical Information

| | Sphere wall | Sphere alp wall |
|---|---|---|
| Power | 9W | 20W |
| Installation | Surface | Surface |
| Color Temperature | 2.700K / 3.000K | 2.700K / 3.000K |
| Lumens | 465 lm | 680 lm |
| Material | Aluminium and glass | Aluminium and glass |
| Finishes | White / Black | White / Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 2.700K | 5333 | ○ | 2.700K | 5339 |
| | ○ | 3.000K | 5334 | ○ | 3.000K | 5340 |
| | ● | 2.700K | 5336 | ● | 2.700K | 5342 |
| | ● | 3.000K | 5337 | ● | 3.000K | 5343 |
| | IP 54 \| PF >0,6 \| 360° \| 1/12 | | | IP 20 \| PF >0,9 \| 360° \| 36° \| 1/6 | | |

CE RoHS EMC

3 YEARS WARRANTY | 30.000 HOURS | 220/240 VAC | UGR <19 | CRI ≥90 | 50/60 Hz | +40°C -20°C



Sphere alp wall




▶ VIDEO

## Mini Comet






## Comet






## Technical Information

| | Mini Comet | Comet |
|---|---|---|
| Power | Switch 10W / 20W | Switch 20W / 40W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 10W: 1.250 lm / 20W 2.400 lm | 20W: 2.500 lm / 40W: 5.000 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | Mini Comet | Comet |
|---|---|---|
| | ☐ 5075 | ☐ 5073 |
| | ■ 5076 | ■ 5074 |
| | ■ 5113 | ■ 5112 |
| | 1/16 | 1/6 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40°x90° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM

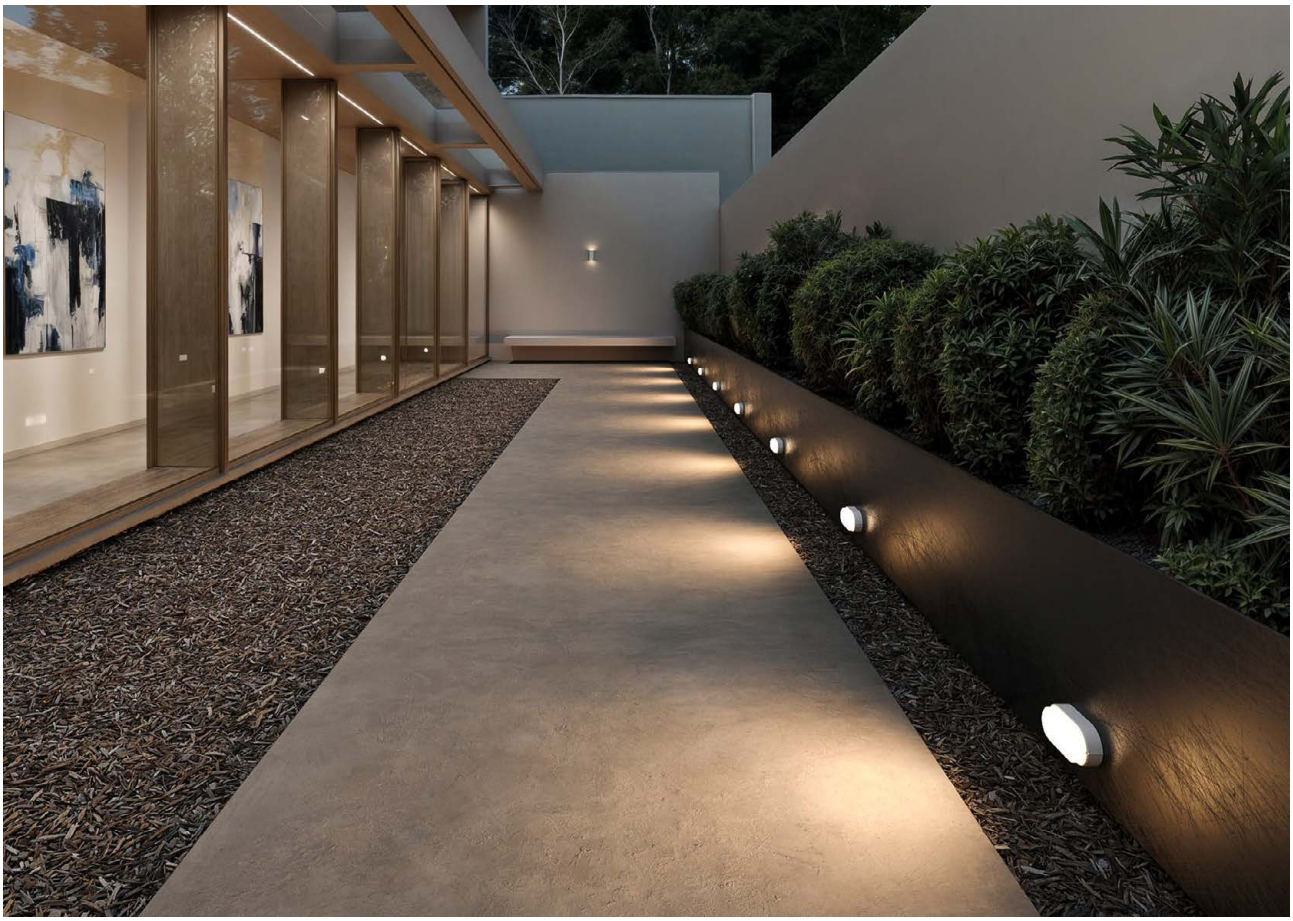



## Zibor






## Selen






## Technical Information

| | Zibor | Selen |
|---|---|---|
| Power | 12W | 12W |
| Installation | Surface | Surface |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 1.200 lm / 1.250 lm | 1.200 lm / 1.250 lm |
| Material | Polycarbonate | Polycarbonate |
| Finishes | White / Black | White / Black |

| Code | | | Zibor | | Selen |
|---|---|---|---|---|---|
| | ○ | 3.000K | 4670 | 4668 | ○ |
| | ○ | 4.000K | 4669 | 4667 | ○ |
| | ● | 3.000K | 4830 | 4828 | ● |
| | ● | 4.000K | 4829 | 4827 | ● |
| | ⓘ | Custom RAL | | Custom RAL | ⓘ |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK02 | +40°C -20°C | 1/10




204

## Blis r






## Blis sq






## Blis rect









## Technical Information

| | Blis r | Blis sq | Blis rect |
|---|---|---|---|
| Power | 15W | 15W | 24W |
| Installation | Surface | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.470 lm | 1.370 lm | 2.360 lm |
| Material | Polycarbonate | Polycarbonate | Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten | White / Black / Corten |
| Code | ○ 4957 | □ 4960 | □ 4982 |
| | ● 4958 | ■ 4961 | ■ 4983 |
| | ● 4959 | ■ 4962 | ■ 4984 |
| | PF >0,6 \| 250° | PF >0,6 \| 180° | PF >0,9 \| 180° |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*IP65 connection box included.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | CRI ≥80 | 50/60 Hz | IK04 | +40°C -20°C | CCT SWITCH | 1/6

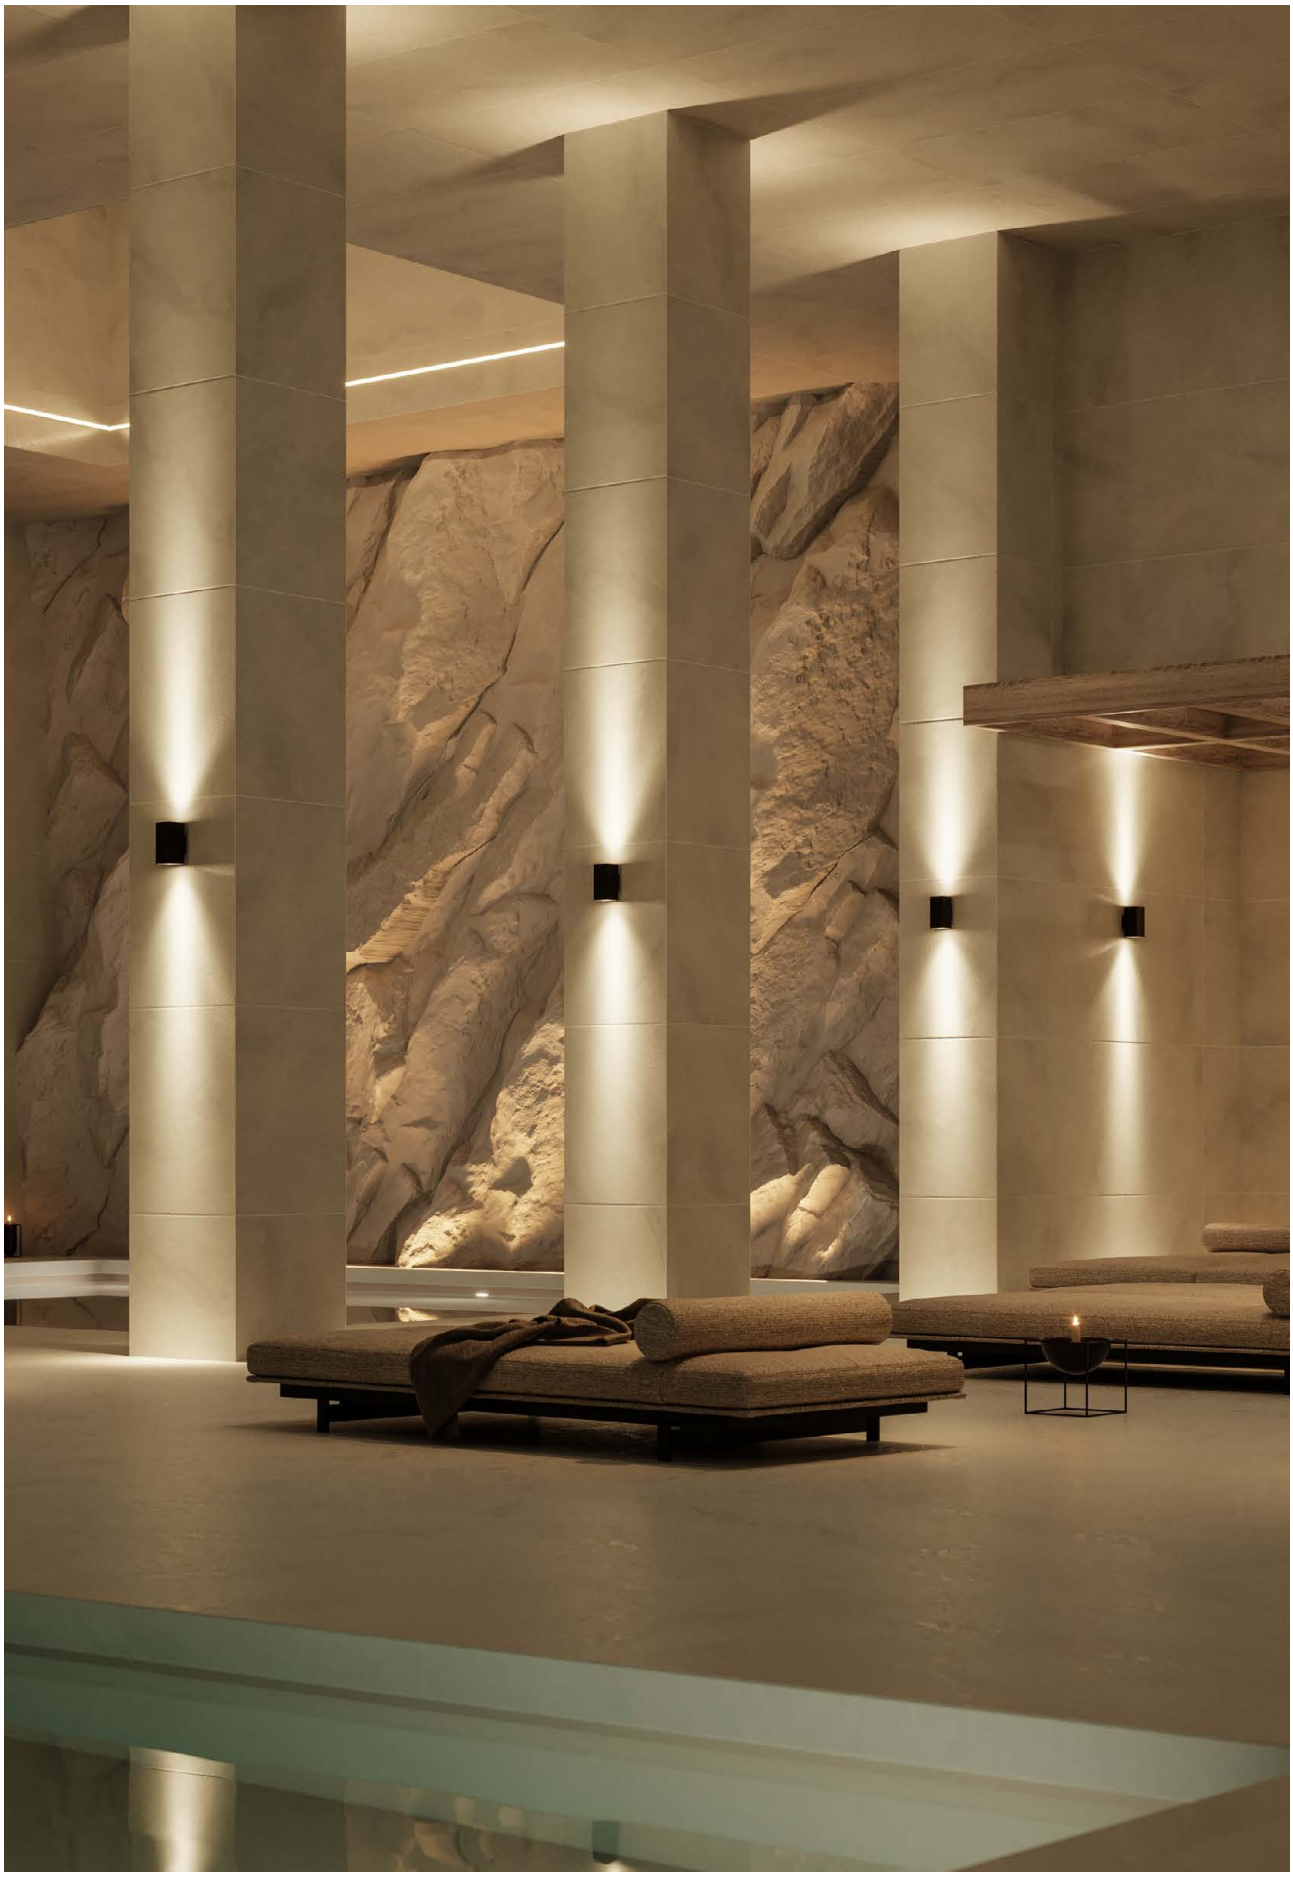

## Sunset r






## Sunset sq






## Technical Information

| | Sunset r | Sunset sq |
|---|---|---|
| Power | 16W | 16W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 1.800 lm | 1.800 lm |
| Material | Policarbonate | Policarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | Sunset r | Sunset sq |
|---|---|---|
| | ○ 4989 | □ 4992 |
| | ● 4990 | ■ 4993 |
| | ● 4991 | ■ 4994 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/10


ITALIAN DREAM

## Sunset XL






## Sunset XL dual






## Technical Information

| | Sunset XL | Sunset XL dual |
|---|---|---|
| Power | 16W | 2X16W |
| Installation | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.300K / 4.000K | Switch 2.700K / 3.300K / 4.000K |
| Lumens | 1.450 lm | 2.900 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | |
|---|---|---|
| | ○ 5419 | ○ 5422 |
| | ● 5420 | ● 5423 |
| | ● 5421 | ● 5424 |
| | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/20 | 1/15 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥90 | 24° | 50/60 Hz | IK05 | +50°C -25°C | CCT SWITCH



New

## Mini Pla






## Pla






## Pla XL






### Technical Information

| | Mini Pla | Pla | Pla XL |
|---|---|---|---|
| Power | 20W | 35W | 35W |
| Installation | Surface | Surface | Surface |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 900 lm | 1.400 lm | 1.400 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten | White / Black / Corten |
| Code | ☐ 5684 | ☐ 5687 | ☐ 5690 |
| | ■ 5685 | ■ 5688 | ■ 5691 |
| | ■ 5686 | ■ 5689 | ■ 5692 |
| | ⓘ Custom RAL | ⓘ Custom RAL | ⓘ Custom RAL |
| | 1/10 | 1/10 | 1/6 |

### Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 110° | 50/60 Hz | +50°C -20°C | CCT SWITCH | 1/20

WALL



## One GU10 wall






## One GU10 wall dual






*GU10 Bulbholder included.

## Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) |

| Code | | |
|---|---|---|
| | ○ 5006 | ○ 5009 |
| | ● 5007 | ● 5010 |
| | ● 5008 | ● 5011 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20



## Zio GU10 wall






## Zio GU10 wall dual






*GU10 Bulbholder included.

### Technical Information

| | | |
|---|---|---|
| Installation | Surface | Surface |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |
| Bulbholder | 50mm GU10 (except Power bulb) | 50mm GU10 (except Power bulb) |

| Code | | |
|---|---|---|
| | ☐ 5012 | ☐ 5015 |
| | ■ 5013 | ■ 5016 |
| | ■ 5014 | ■ 5017 |
| | ⓘ Custom RAL | ⓘ Custom RAL |

CE RoHS

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/20



# Portable & table

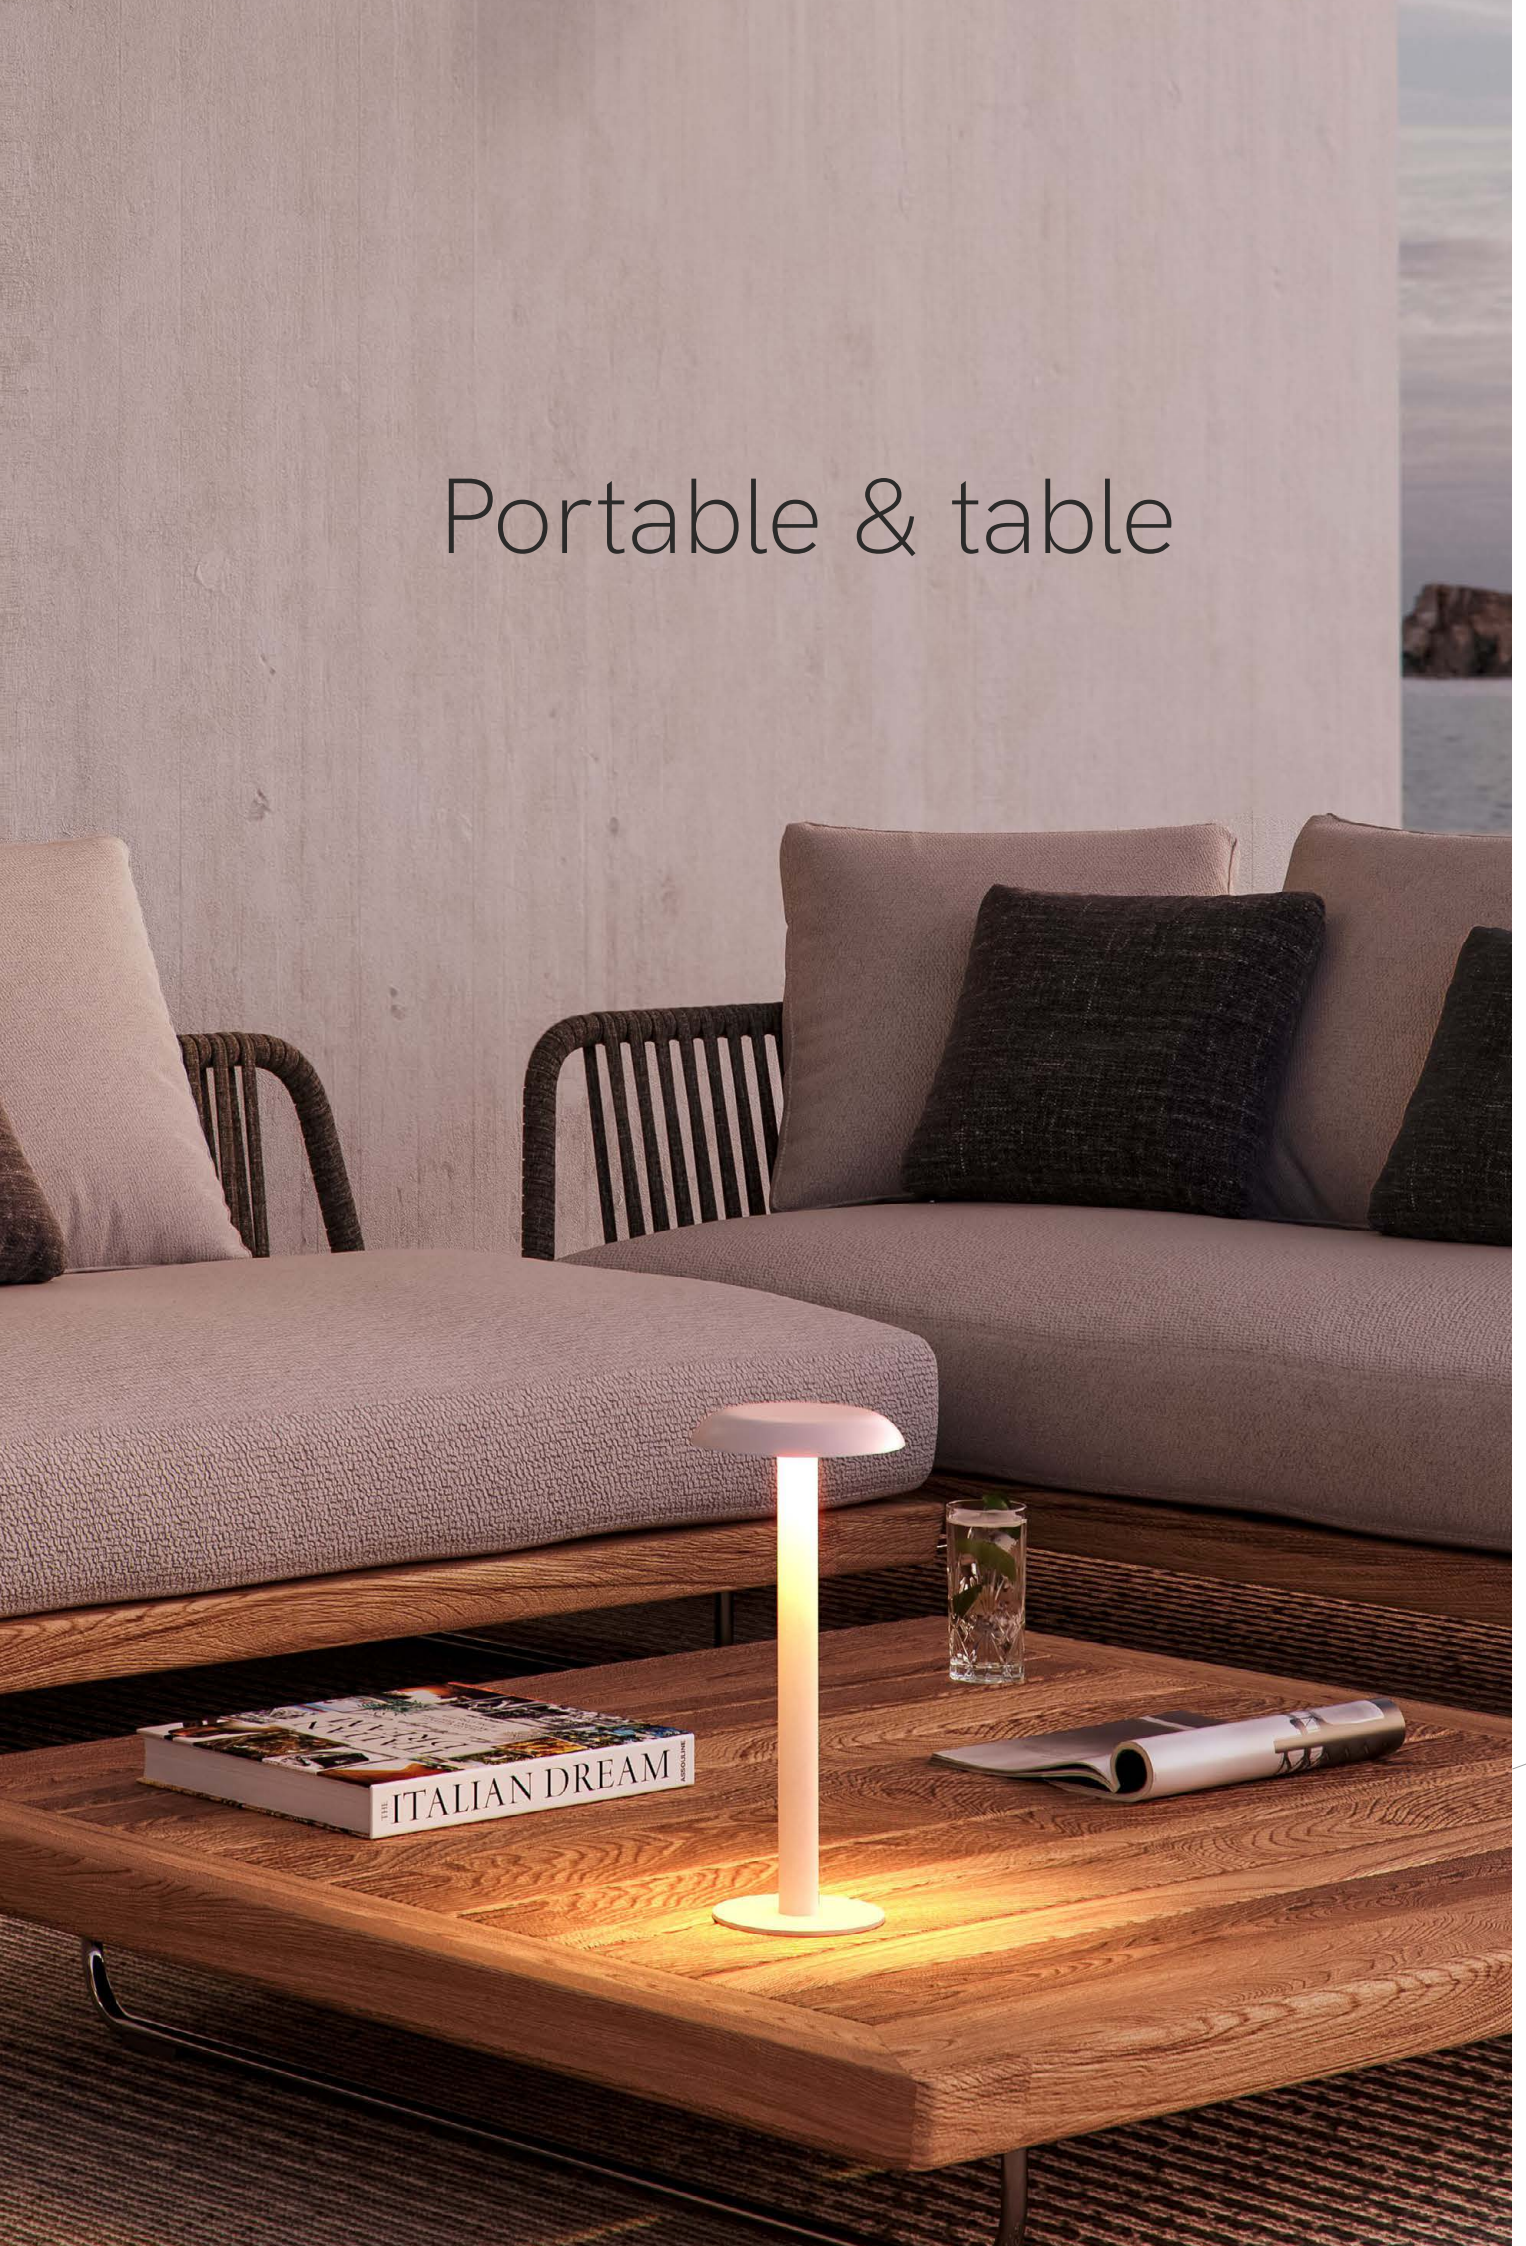


▶ VIDEO

## Bag






## Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 50 lm |
| Material | Aluminium |
| Finishes | White / Black / Brushed Gold / Champagne |

| Code | |
|---|---|
| | 5329 |
| | 5330 |
| | 5331 |
| | 5332 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 2,5 HOURS | 3,5 HOURS | USB-C 5V | 1.800 mAh | IP 20 | CRI ≥90 | 180° | DIMMABLE | IK06 | +40°C -20°C | 1/20


▶ VIDEO

## Bimba






### Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Portable |
| Color Temperature | Switch 2.000K / 3.100K / 5.000K |
| Lumens | 118 lm |
| Material | Aluminium |
| Finishes | White / Black / Brushed Gold / Champagne |

| Code | | |
|---|---|---|
| | 5325 | |
| | 5326 | New |
| | 5327 | |
| | 5328 | |

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 9.000 HOURS | 3,5 HOURS | 5 HOURS | USB-C 5V | 3.000 mAh | IP 65 | CRI ≥80 | 110° | DIMMABLE | IK04 | +40°C -20°C | CCT SWITCH | 1/8



## Converse






## Technical Information

| | |
|---|---|
| Power | 2,5W |
| Installation | Portable |
| Color Temperature | 2.700K / 5.000K |
| Lumens | 225 lm |
| Finishes | White |

| | |
|---|---|
| Code | ○ 3916-N |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 50.000 HOURS | 5-6 HOURS | 4-150 HOURS | MICRO USB 5V | 2.200 mAh | IP 20 | CRI ≥82 | 360° | DIMMABLE | +40°C -20°C | 1/15


▶ VIDEO





## Madi





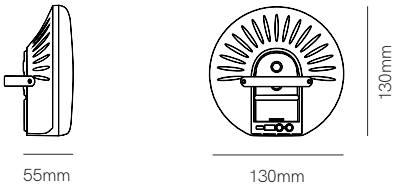


## Technical Information

| | |
|---|---|
| Power | 4W |
| Installation | Portable |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 600 lm |
| Material | Polycarbonate and ABS |
| Finishes | White |

| | |
|---|---|
| Code | ○ 5154 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | POWER BANK | 3-4 HOURS | 100% 6-7H 50% 12-15H SOS 16-18H | USB-C 5V 2A | 5.200 mAh | IP 54 | CRI ≥80 | 200° | DIMMABLE | IK08 | +40°C -10°C | CCT SWITCH | 1/20

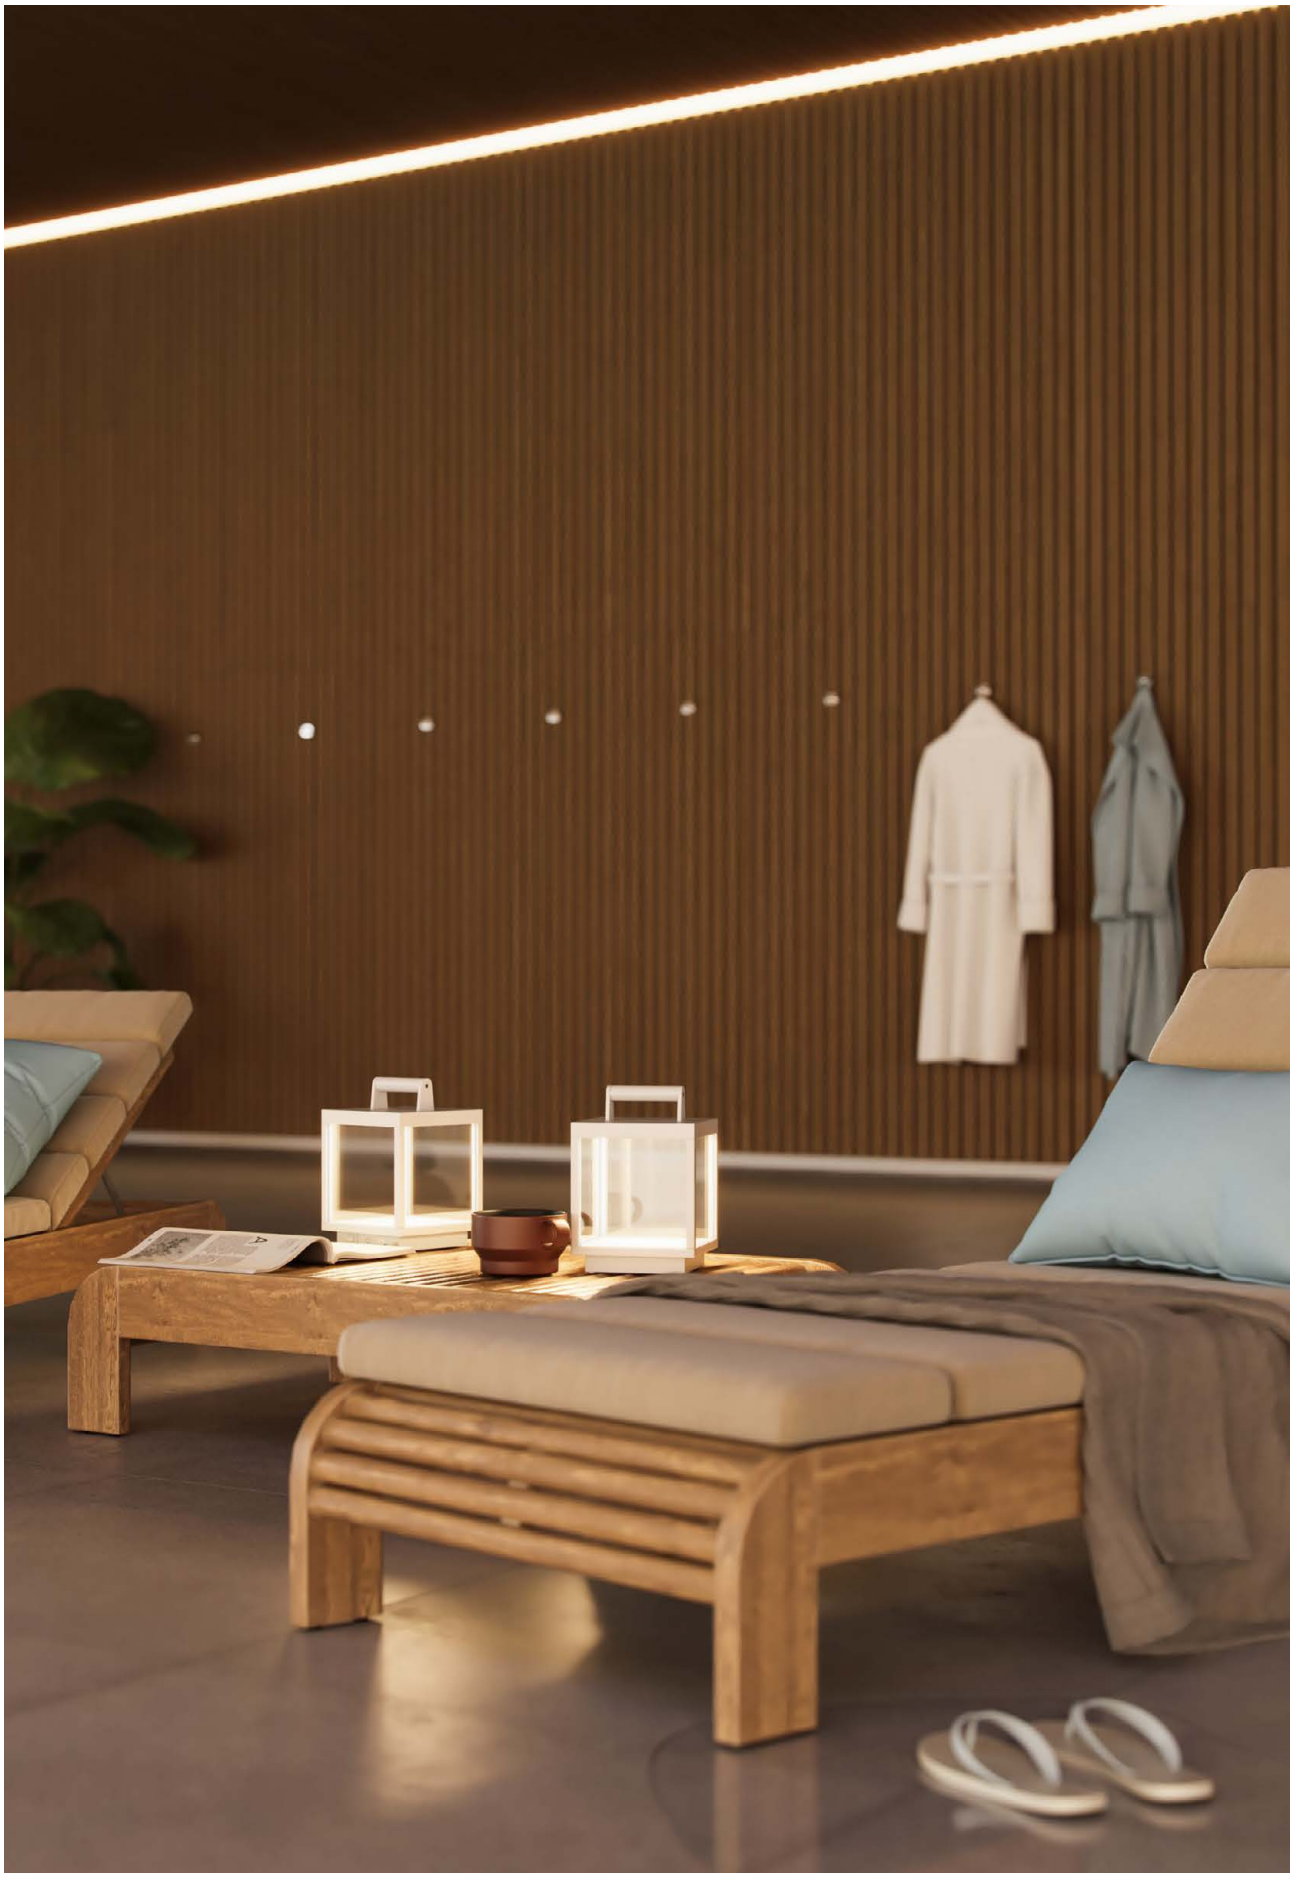

## Visor






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 460 lm / 230 lm / 46 lm |
| Material | Aluminium |
| Finishes | White / Corten |

| Code | |
|---|---|
| | ☐ 3929 |
| | ■ 3931 |

CE RoHS

*Charger by USB. Charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 6,5 HOURS | 5/11/25 HOURS 7.800 mAh | 3,7V USB | IP 65 | CRI ≥80 | 120° | IK05 | 3 INTENSITIES | +45°C -20°C | 1/4



## Stem






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Table |
| Color Temperature | 2.700K |
| Lumens | 175 lm |
| Material | Aluminium and polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ○ 4979 |
| | ● 4981 |

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | PF >0,45 | CRI ≥90 | 30° | 5W | 50/60 Hz | IK06 | +50°C -20°C | 1/20



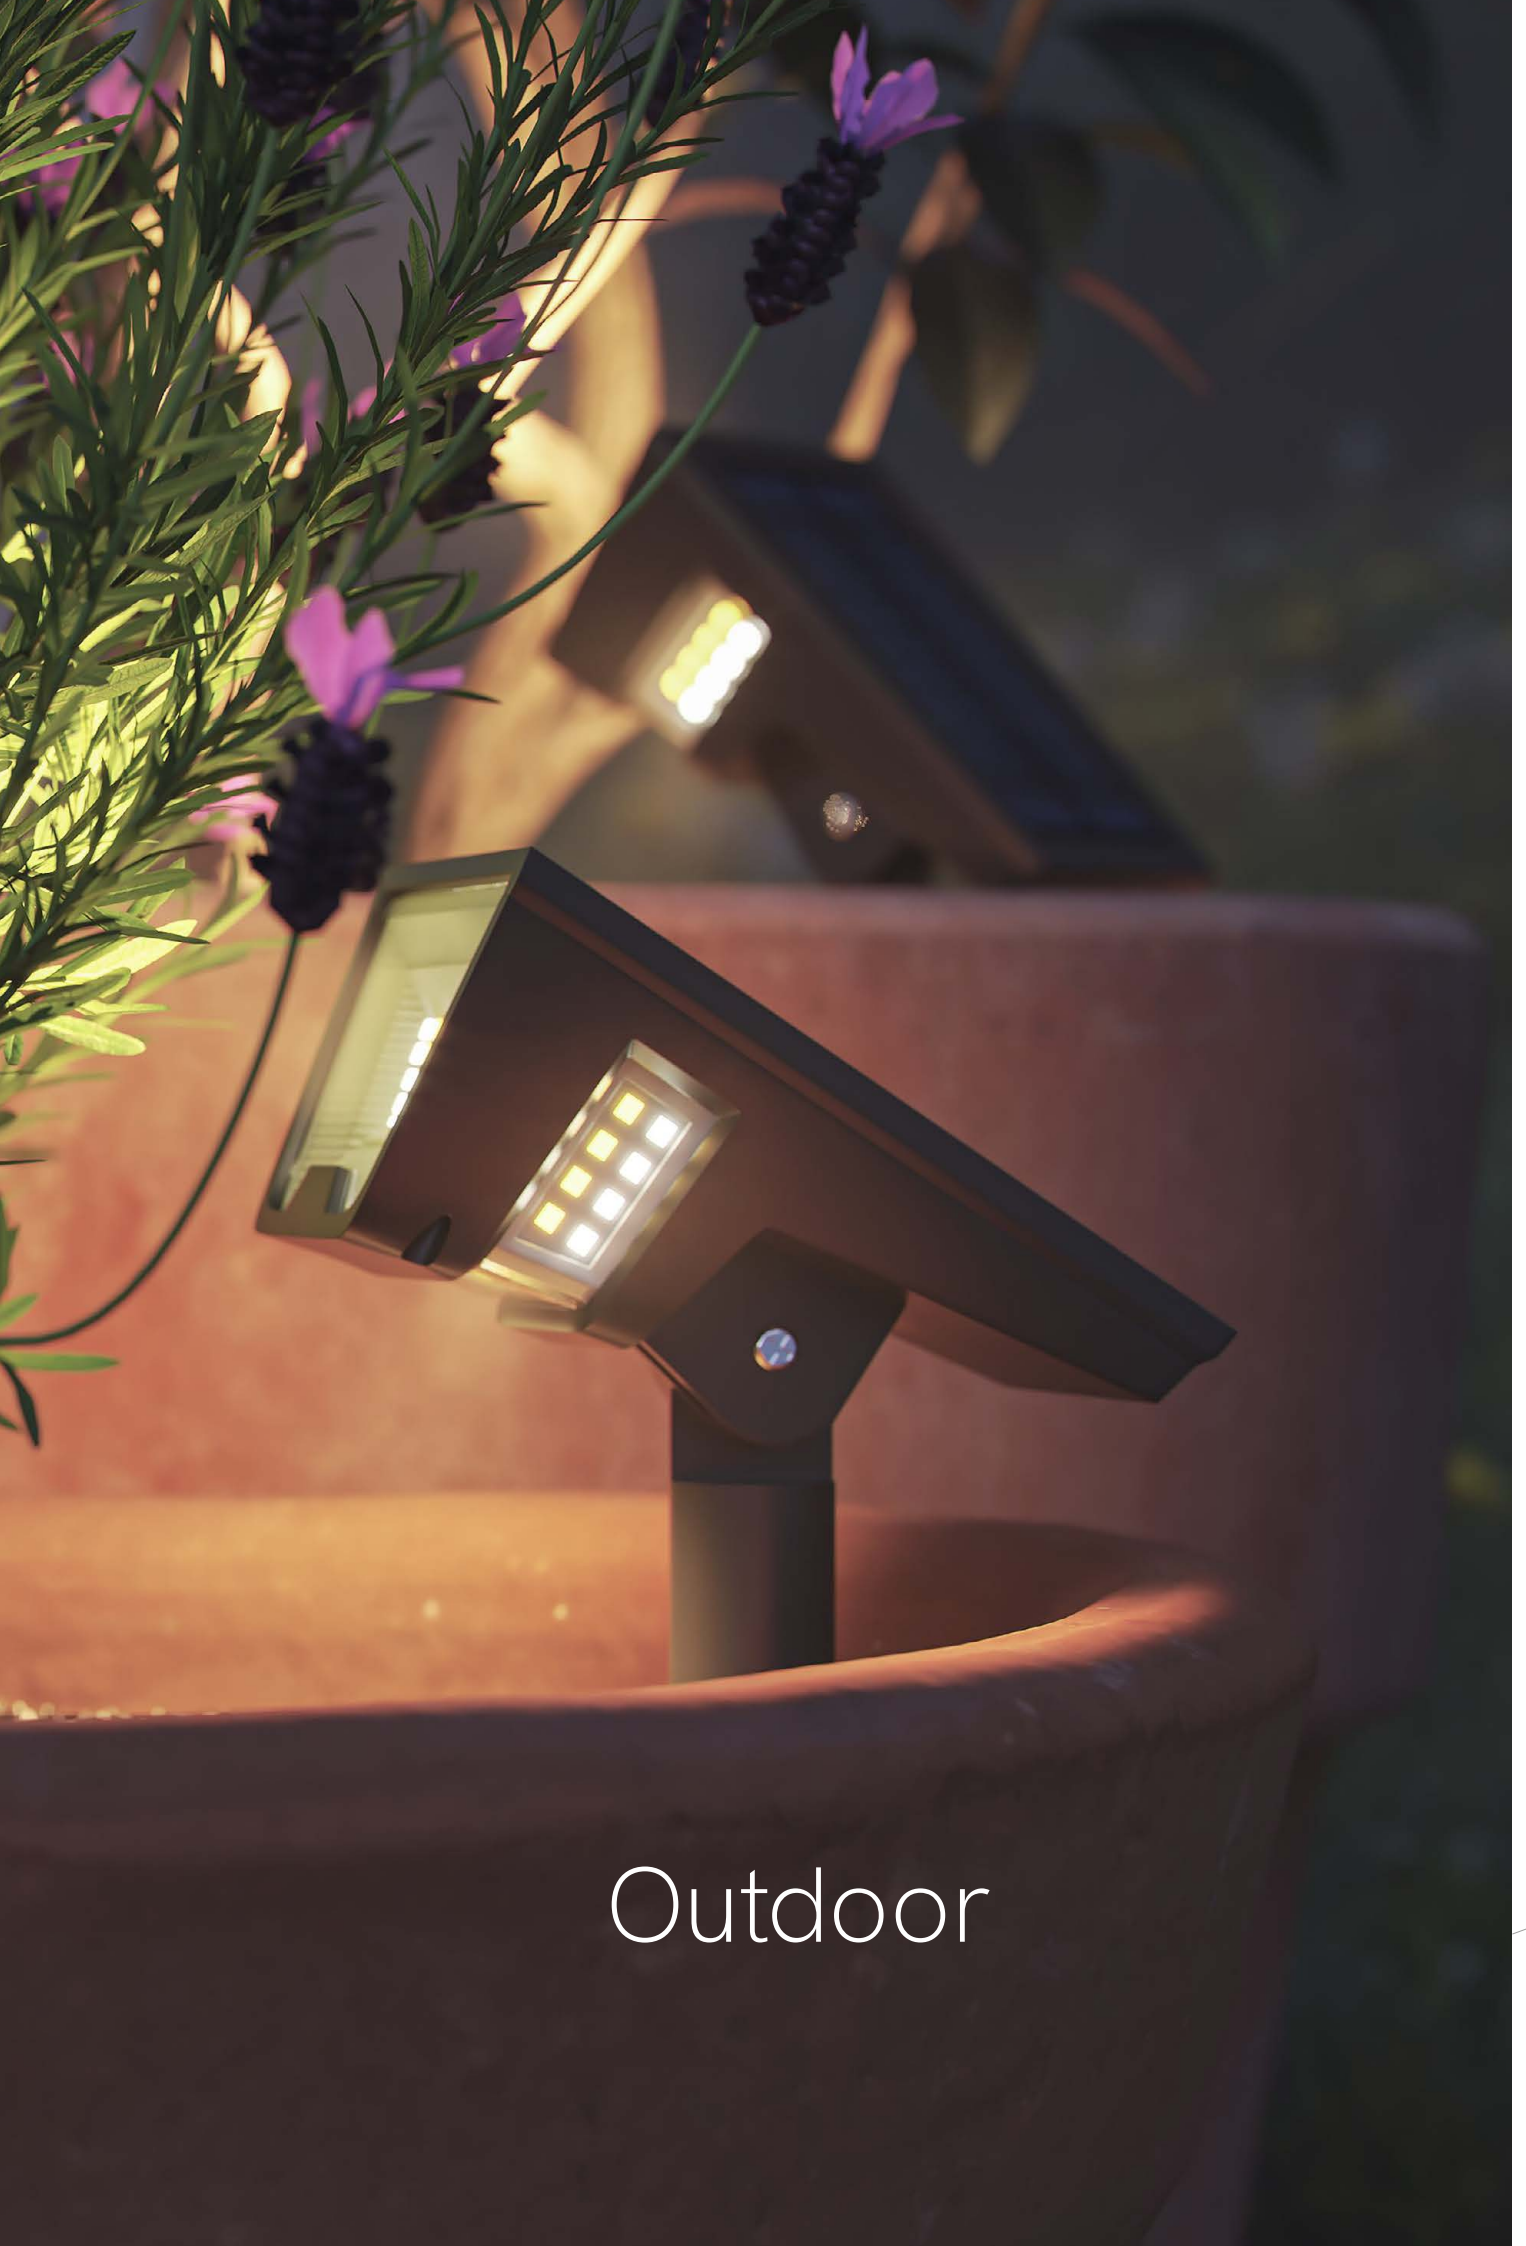

# Outdoor



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa SL. Photography: David Rodríguez.

## Optic








## Technical Information

| | |
|---|---|
| Power | 2W |
| Installation | Recessed |
| Color Temperature | 3.000K |
| Lumens | 55 lm |
| Material | Inox 304 |
| Finishes | Brushed silver |

| | |
|---|---|
| Code | 4331 |

## Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Recessed box included. Integrated driver.

3 YEARS WARRANTY | 50.000 HOURS | IP 67 | 100/240 VAC | PF >0,4 | CRI ≥80 | CABLE 50CM | 2.000Kg | 35° | 50/60 Hz | IK09 | +50°C -20°C | 1/50



| | New | New | |
|---|---|---|---|
| Nano Sigma | Mini Sigma | Sigma | Sigma XL |





















## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 3W | 9W | 12W | 17W |
| Installation | Recessed | Recessed | Recessed | Recessed |
| Color Temperature | 3.000K | 3.000K | 3.000K | 3.000K |
| Lumens | 210 lm | 450 lm | 650 lm | 1.440 lm |
| Material | Stainlees steel + alumin. | Stainlees steel + alumin. | Stainlees steel + alumin. | Stainlees steel + alumin. |
| Finishes | Brushed silver | Brushed silver | Brushed silver | Brushed silver |
| Code | 3.000K 4251 | 3.000K 5576 | 3.000K 5577 | 3.000K 4135 |
| | PF >0,6 \| 1/30 | PF >0,5 \| 1/12 | PF >0,9 \| 1/8 | PF >0,9 \| 1/8 |

## Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Integrated driver. Drainage (min. 300mm).

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 100/277 VAC | CRI ≥80 | CABLE 24CM | 30° | 50/60 Hz | IK05 | +40°C -20°C

OUTDOOR



## Caddie






## Fade






## Technical Information

| | Caddie | Fade |
|---|---|---|
| Power | 3W | 5W |
| Installation | Floor | Floor |
| Color Temperature | 2.200K / 3.000K | 2.200K / 3.000K |
| Lumens | 200 lm / 270 lm | 350 lm / 450 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black / Corten | Black / Corten |

| Code | | | | | | | |
|---|---|---|---|---|---|---|---|
| | ● | 2.200K | 5678 | New | ● | 2.200K | 5680 | New |
| | ● | 3.000K | 3581 | | ● | 3.000K | 3580 | |
| | ● | 2.200K | 5679 | New | ● | 2.200K | 5681 | New |
| | ● | 3.000K | 4923 | | ● | 3.000K | 4924 | |
| | | CRI ≥80 | | | | CRI ≥90 | | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included.

3 YEARS WARRANTY | 35.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CABLE 24CM | 45° | 50/60 Hz | IK05 | +40°C -20°C | 1/50

OUTDOOR

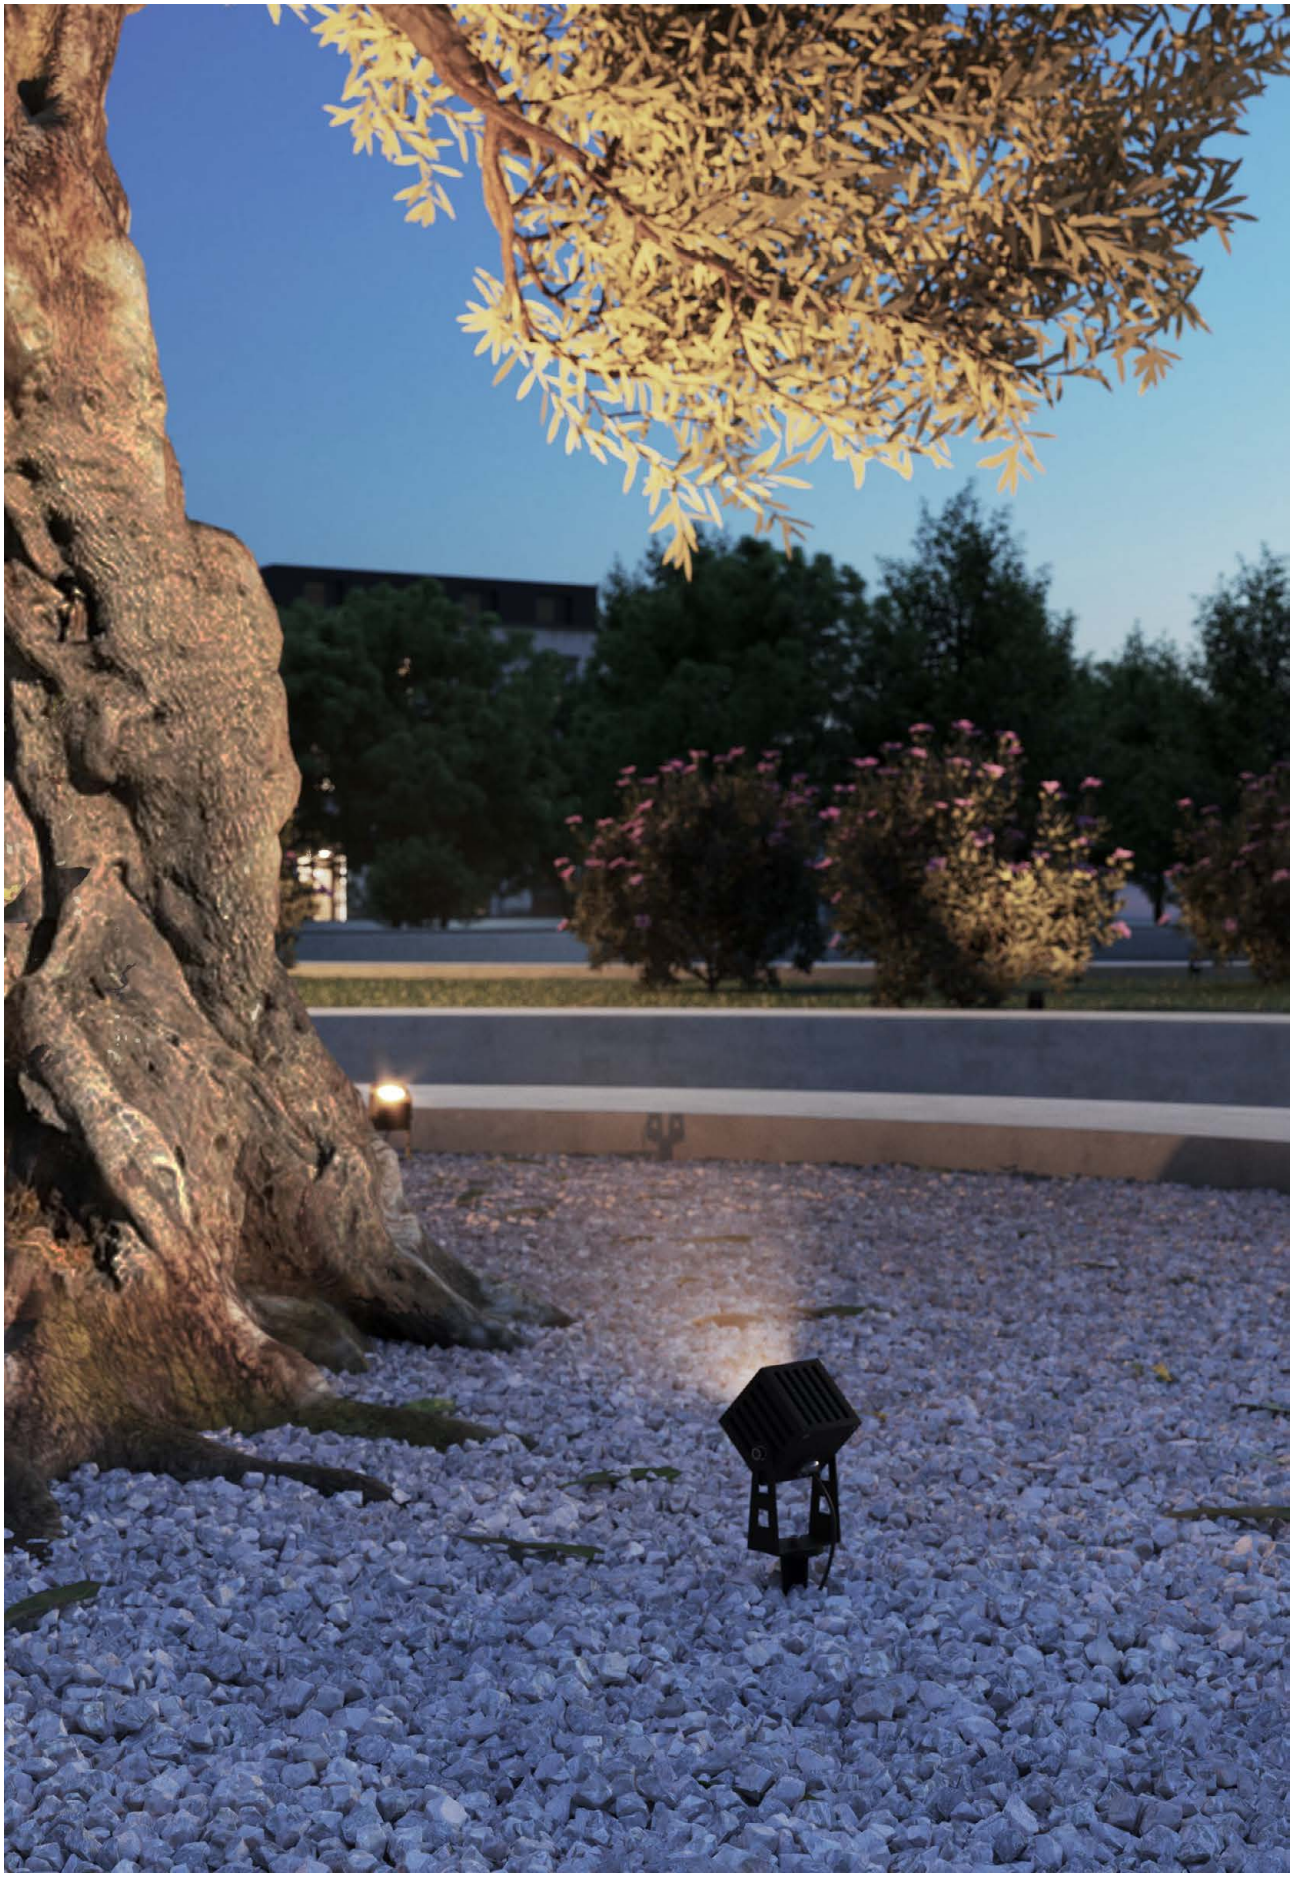

## Zas r






## Zas sq






## Technical Information

| | Zas r | Zas sq |
|---|---|---|
| Power | 3W | 7W |
| Installation | Floor | Floor |
| Color Temperature | 2.200K / 3.000K | 3.000K / GREEN |
| Lumens | 200 lm / 240 lm | 450 lm / 380 |
| Material | Aluminium | Aluminium |
| Finishes | Black / Corten | White / Black / Corten |

| Code | | | | | | | |
|---|---|---|---|---|---|---|---|
| | ● | 2.200K | 5682 | New | □ | 3.000K | 4690 | |
| | ● | 3.000K | 4134 | | ■ | 3.000K | 4692 | |
| | ● | 2.200K | 5683 | New | ■ | GREEN | 5694 | New |
| | ● | 3.000K | 4922 | | ■ | 3.000K | 4693 | |
| | | | | | ■ | GREEN | 5693 | New |

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05

220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included.

3 YEARS WARRANTY | IP 65 | CRI ≥80 | CABLE 24CM | 50/60 Hz | +40°C -20°C | 1/50

OUTDOOR


▶ VIDEO

## Nik






## Technical Information

| | |
|---|---|
| Power | 5W |
| Installation | Surface |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 340 lm / 350 lm |
| Material | Aluminium |
| Finishes | Gray |

| Code | | | |
|---|---|---|---|
| | ● | 3.000K | 4291 |
| | ● | 4.000K | 4292 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Integrated driver.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | 5° | 50/60 Hz | IK05 | +40°C -20°C | 1/40

OUTDOOR



## Signal






## Technical Information

| | |
|---|---|
| Power | 9W |
| Installation | Floor / Tree trunk |
| Color Temperature | 3.000K |
| Lumens | 720 lm |
| Material | Aluminium |
| Finishes | Dark gray |

| | | |
|---|---|---|
| Code | 3.000K | 4290 |

CE RoHS

*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | CABLE 20CM | 30° | 50/60 Hz | IK05 | +40°C -20°C | 1/25

OUTDOOR





## Sair






## Sair XL






## Technical Information

| | Sair | Sair XL |
|---|---|---|
| Power | 10W | 20W |
| Installation | Floor | Floor |
| Color Temperature | 2.200K / 3.000K | 2.200K / 3.000K |
| Lumens | 450 lm / 900 lm | 1.000 lm / 1.500 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | | | | |
|---|---|---|---|---|---|---|---|
| | ○ | 3.000K | 4894 | | ○ | 3.000K | 4897 | |
| | ● | 2.200K | 5674 | New | ● | 2.200K | 5676 | New |
| | ● | 3.000K | 4895 | | ● | 3.000K | 4898 | |
| | ● | 2.200K | 5675 | New | ● | 2.200K | 5677 | New |
| | ● | 3.000K | 4896 | | ● | 3.000K | 4899 | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC

*Spike included.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/265 VAC | PF >0,9 | CRI ≥90 | CABLE 24CM | 18° | 50/60 Hz | IK05 | +40°C -20°C | 1/20

OUTDOOR



## Fix






## Technical Information

| | |
|---|---|
| Installation | Floor |
| Material | Polypropylene |
| Finishes | Black |
| Lamp Holder | E27 |

| | |
|---|---|
| Code | ● 4820 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

*Spike included. Recomended lamp Par 38 (page 697).

3 YEARS WARRANTY | IP 65 | | 50/60 Hz | 1/6

OUTDOOR


▶ VIDEO

## Wech











## Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Portable |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 600 lm |
| Material | Aluminium & Polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5004 |
| | ■ 5005 |

CE RoHS EMC

Clamp, lyre and charger included.

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | POWER BANK | 10 HOURS | 6 HOURS 4.400 mAh | USB-C 5V | IP 65 | CRI ≥80 | 110° | IK08 | +45°C -10°C | CCT SWITCH | 1/10

OUTDOOR



## Sky 10W spike






### Technical Information

| | |
|---|---|
| Power | 10W |
| Installation | Floor |
| Color Temperature | 3.000K / GREEN |
| Lumens | 1.000 lm / 820 lm |
| Material | Aluminium |
| Finishes | Corten |

| Code | | | |
|---|---|---|---|
| | 3.000K | 4340 |
| | GREEN | 4341 |

### Accessories



Linear Joint IP68
Ø26x95mm
5671 New



T Joint IP68
74x118mm
5672 New



X Joint IP68
122x122mm
5673 New

CE RoHS

*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV | 1/32

OUTDOOR

## Sky 10W switch






## Sky 20W switch






## Technical Information

| | | |
|---|---|---|
| Power | 10W | 20W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 1.200 lm | 2.400 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Gray | White / Black / Gray |

| Code | | |
|---|---|---|
| | ☐ 4679 | ☐ 4682 |
| | ■ 4680 | ■ 4683 |
| | ■ 4681 | ■ 4684 |
| | 1/32 | 1/24 |

## Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

## Sky 30W switch






## Sky 40W switch






## Technical Information

| | Sky 30W switch | Sky 40W switch |
|---|---|---|
| Power | 30W | 40W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 3.600 lm | 4.800 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black / Gray | White / Black / Gray |

| Code | | |
|---|---|---|
| | ☐ 4685 | ☐ 4688 |
| | ■ 4686 | ■ 4689 |
| | ■ 4687 | ■ 4694 |
| | 1/24 | 1/12 |

## Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | CCT SWITCH | >1KV

OUTDOOR



## Sky 10W sensor






## Sky 30W sensor






## Sky 50W sensor






## Technical Information

| | Sky 10W sensor | Sky 30W sensor | Sky 50W sensor |
|---|---|---|---|
| Power | 10W | 30W | 50W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 1.150 lm / 1.200 lm | 3.550 lm / 3.600 lm | 5.950 lm / 6.000 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black | White / Black | White / Black |

| Code | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | ☐ | 4.000K | 4349 | ☐ | 4.000K | 4352 | ☐ | 4.000K | 4354 |
| | ☐ | 5.000K | 4350 | ☐ | 5.000K | 4353 | ☐ | 5.000K | 4355 |
| | ■ | 4.000K | 4308 | ■ | 4.000K | 4309 | ■ | 4.000K | 4311 |
| | ■ | 5.000K | 4351 | ■ | 5.000K | 4310 | ■ | 5.000K | 4356 |
| | | | 1/32 | | | 1/24 | | | 1/12 |

## Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec 5 min | 1m 7m | ON OFF | >1KV

OUTDOOR

## Sky 10W






## Sky 20W






## Sky 30W






### Technical Information

| | Sky 10W | Sky 20W | Sky 30W |
|---|---|---|---|
| Power | 10W | 20W | 30W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 5.000K | 2.700K / 4.000K / 5.000K | 2.700K / 4.000K |
| Lumens | 1.150 lm | 2.250 lm / 2.400 lm / 2.450 lm | 3.450 lm / 3.600 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | White | Black / Corten | Corten |

| Code | | | |
|---|---|---|---|
| | ☐ 5.000K 4254 | ■ 5.000K 4266 | ■ 2.700K 4279 |
| | | ■ 2.700K 4401 | ■ 4.000K 4280 |
| | | ■ 4.000K 4402 | |
| | 1/36 | 1/32 | 1/24 |

### Accessories



Optional spike
175mm
■ 4027-N



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >1KV

## Sky 100W






## Sky 150W






## Sky 200W






## Technical Information

| | Sky 100W | Sky 150W | Sky 200W |
|---|---|---|---|
| Power | 100W | 150W | 200W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 2.200K | 2.200K | 2.200K |
| Lumens | 7.000 lm | 11.000 lm | 14.000 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black |
| Code | ■ 3955 | ■ 3956 | ■ 3957 |
| | 1/4 | 1/2 | 1/2 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >2KV



Club Tennis Olesa, Olesa de Montserrat, Design: Padel 10. (Spain).

## Polaris 100W






## Polaris 150W






## Polaris 200W






## Technical Information

| | 100W | 150W | 200W |
|---|---|---|---|
| Power | 100W | 150W | 200W |
| Installation | Surface | Surface | Surface |
| Color Temperature | 3.000K / 4.000K / 5.000K | 3.000K / 4.000K / 5.000K | 3.000K / 4.000K / 5.000K |
| Lumens | 12.700 lm / 13.000 lm / 13.200 lm | 19.200 lm / 19.500 lm / 19.700 lm | 25.700 lm / 26.000 lm / 26.200 lm |
| Material | Aluminium | Aluminium | Aluminium |
| Finishes | Black | Black | Black |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ■ | 3.000K | 4513 | ■ | 3.000K | 4516 | ■ | 3.000K | 4519 |
| | ■ | 4.000K | 4514 | ■ | 4.000K | 4517 | ■ | 4.000K | 4520 |
| | ■ | 5.000K | 4515 | ■ | 5.000K | 4518 | ■ | 5.000K | 4521 |
| | 1/4 | | | 1/3 | | | 1/3 | | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C -20°C | AKZO NOBEL | >6KV

OUTDOOR



## Krion 300W






| 5m | 10m | 15m | 20m |
|---|---|---|---|
| 380 lx | 100 lx | 45 lx | 25 lx |

## Krion 400W






| 5m | 10m | 15m | 20m |
|---|---|---|---|
| 470 lx | 120 lx | 55 lx | 30 lx |

## Technical Information

| | Krion 300W | Krion 400W |
|---|---|---|
| Power | 300W | 400W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 39.000 lm / 39.300 lm | 52.000 lm / 52.300 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |

| Code | Krion 300W | Krion 400W |
|---|---|---|
| | ■ 4.000K 4509 | ■ 4.000K 4510 |
| | ■ 5.000K 4511 | ■ 5.000K 4512 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C -25°C | AKZO NOBEL | >6KV | 1

OUTDOOR



## Clos base mini






## Clos dual base mini






## Clos base






## Clos dual base






## Technical Information

| | | | | |
|---|---|---|---|---|
| Installation | Floor | Floor | Floor | Floor |
| Material | Aluminium | Aluminium | Aluminium | Aluminium |
| Finishes | White / Black / Corten | White / Black / Corten | White / Black / Corten | White / Black / Corten |
| Code | ○ 4882 | ○ 4888 | ○ 4885 | ○ 4891 |
| | ● 4883 | ● 4889 | ● 4886 | ● 4892 |
| | ● 4884 | ● 4890 | ● 4887 | ● 4893 |
| | 1/24 | 1/24 | 1/12 | 1/12 |

## Accessories (page 565).



Clos wall
○ 4876
● 4877
● 4878



Clos wall dual
○ 4879
● 4880
● 4881

CE RoHS

5 YEARS WARRANTY | IK08

OUTDOOR



## Cam






## Cam XL






## Technical Information

| | Cam | Cam XL |
|---|---|---|
| Power | 9W | 9W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 690 lm / 700 lm | 690 lm / 700 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | | Cam | | Cam XL |
|---|---|---|---|---|---|
| | ☐ | 3.000K | 4709 | 3751 | |
| | ☐ | 4.000K | 3586 | 3752 | |
| | ■ | 3.000K | 4710 | 3753 | |
| | ■ | 4.000K | 3590 | 3754 | |
| | | | 1/4 | 1/2 | |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 54 | 220/240 VAC | PF >0,7 | CRI ≥80 | 120° | 50 Hz | IK08 | +45°C -25°C

OUTDOOR



## Mac floor






## Mac floor XL






## Technical Information

| | Mac floor | Mac floor XL |
|---|---|---|
| Power | 12W | 12W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 890 lm / 900 lm | 890 lm / 900 lm |
| Material | Aluminium and Polycarbonate | Aluminium and Polycarbonate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | ○ | 3.000K | 4837 | ○ | 3.000K | 4843 |
| | ○ | 4.000K | 4838 | ○ | 4.000K | 4844 |
| | ● | 3.000K | 4839 | ● | 3.000K | 4845 |
| | ● | 4.000K | 4840 | ● | 4.000K | 4846 |
| | ● | 3.000K | 4841 | ● | 3.000K | 4847 |
| | ● | 4.000K | 4842 | ● | 4.000K | 4848 |
| | | | 1/12 | | | 1/6 |

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 100° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR



## Tura






## Tura XL






## Technical Information

| | Tura | Tura XL |
|---|---|---|
| Power | 12W | 12W |
| Installation | Floor | Floor |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 950 lm / 960 lm | 950 lm / 960 lm |
| Material | Aluminium and Methacrylate | Aluminium and Methacrylate |
| Finishes | White / Black / Corten | White / Black / Corten |

| Code | | | | Code | | |
|---|---|---|---|---|---|---|
| ○ | 3.000K | 4849 | | ○ | 3.000K | 4855 |
| ○ | 4.000K | 4850 | | ○ | 4.000K | 4856 |
| ● | 3.000K | 4851 | | ● | 3.000K | 4857 |
| ● | 4.000K | 4852 | | ● | 4.000K | 4858 |
| ● | 3.000K | 4853 | | ● | 3.000K | 4859 |
| ● | 4.000K | 4854 | | ● | 4.000K | 4860 |

1/6 | 1/4

## Accessories



Linear Joint IP68
Ø26x95mm
■ 5671 New



T Joint IP68
74x118mm
■ 5672 New



X Joint IP68
122x122mm
■ 5673 New

CE RoHS

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 180° | 50/60 Hz | IK06 | +50°C -20°C

OUTDOOR



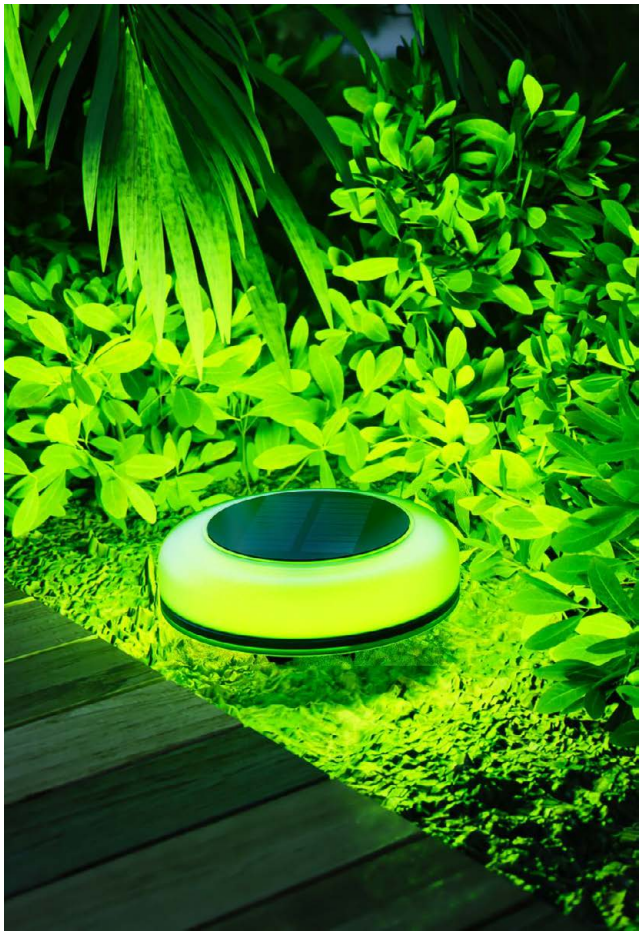



New

## Twist






## Technical Information

| | |
|---|---|
| Power | 1W |
| Installation | Floor |
| Color Temperature | Switch 2.700K / RGB |
| Lumens | 20 lm |
| Material | ABS |
| Finishes | Black |

| | |
|---|---|
| Code | ■ 5701 |

CE RoHS

3 YEARS WARRANTY | 1 YEARS WARRANTY | 10.000 HOURS | 7-8 HOURS | 5-8H. | 500 mAh | IP 54 | CRI ≥80 | 180° | IK04 | +45°C 0°C | ON OFF | CCT SWITCH | 1/20



## Gam






## Technical Information

| | |
|---|---|
| Power | 0,7W |
| Installation | Floor |
| Color Temperature | Switch 2.700K / 3.200K / 4.000K |
| Lumens | 85 lm |
| Material | ABS + PMMA |
| Finishes | Black |

| | |
|---|---|
| Code | ■ 5178 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 6-8 HOURS | 6-8H. | 1.800 mAh | IP 54 | CRI ≥80 | 270° | IK02 | +55°C -10°C | ON OFF | CCT SWITCH | 1/50

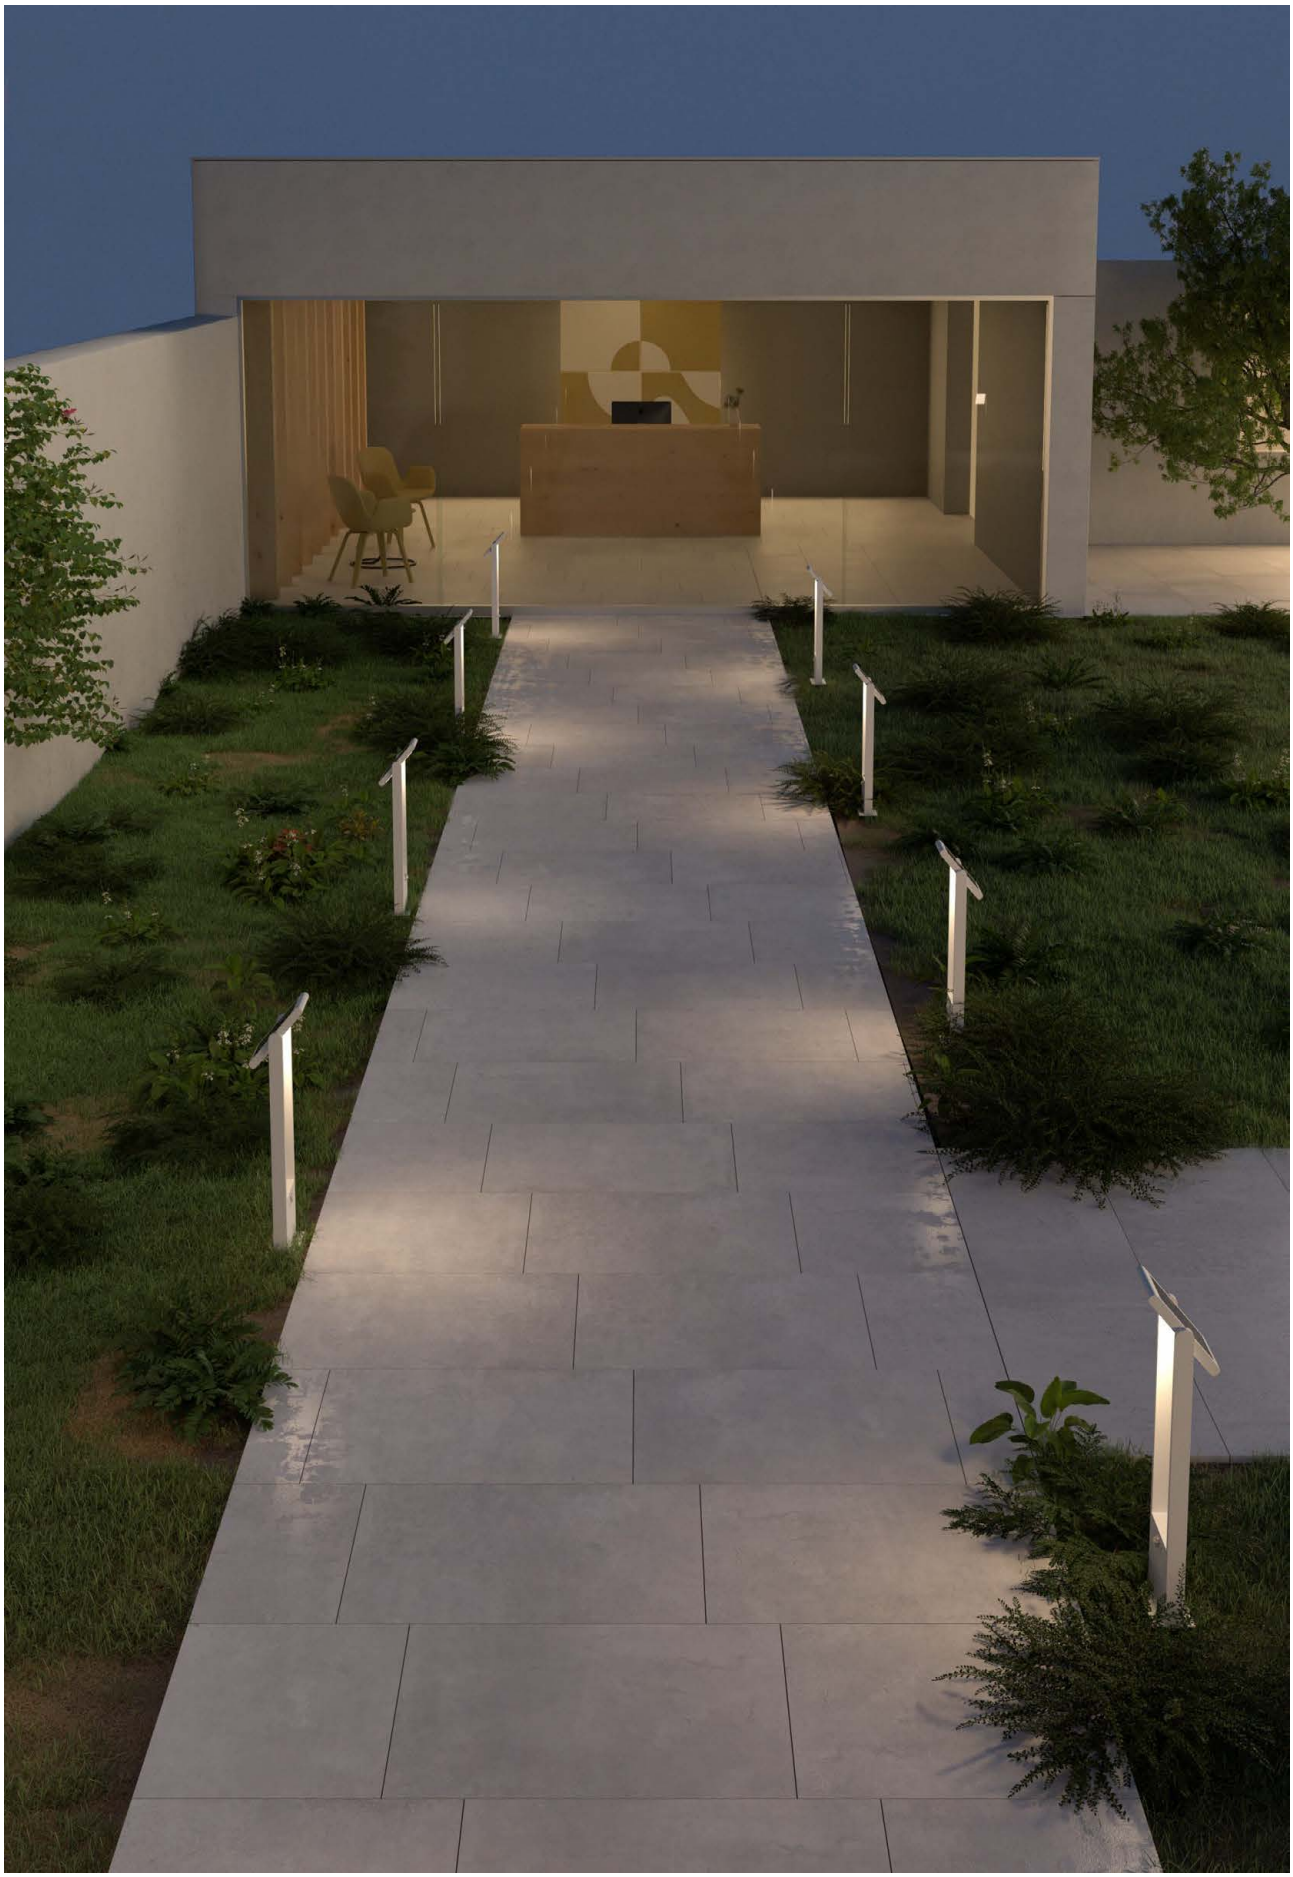

## Popa






## Popa XL



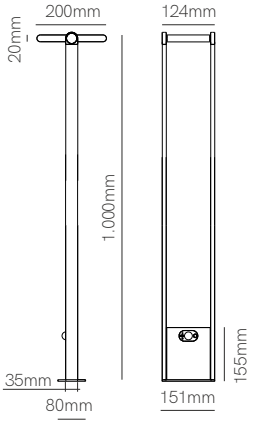


## Technical Information

| | Popa | Popa XL |
|---|---|---|
| Power | 1,6W | 1,6W |
| Installation | Floor | Floor |
| Color Temperature | 4.000K | 4.000K |
| Lumens | 150 lm | 150 lm |
| Material | Aluminium | Aluminium |
| Finishes | White / Black | White / Black |

| Code | | |
|---|---|---|
| | ☐ 3882 | ☐ 3884 |
| | ■ 3883 | ■ 3885 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/2



## Proa






## Technical Information

| | |
|---|---|
| Power | 1,6W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 150 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 3531 |
| | ■ 3532 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON | OFF | 8 sec 8 min | 1/6





## Egna






## Technical Information

| | |
|---|---|
| Power | 3W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 250 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | | |
|---|---|---|
| | ☐ | 3587 |
| | ■ | 3592 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 25.000 HOURS | 5-6 HOURS | 11% 20H. 100% 2-3H. | 4.500 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 1/8



## Iris






## Technical Information

| | |
|---|---|
| Power | 2,5W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 174 lm |
| Material | Aluminium |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 3496 |
| | ■ 3497 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 20.000 HOURS | 5-6 HOURS | 15% 10H. 100% 2-3H. | 2.200 mAh | IP 54 | CRI ≥80 | 120° | IK08 | +45°C -25°C | PIR SENSOR | ON OFF | 8 sec 8 min | 1/6



## Visor solar






## Technical Information

| | |
|---|---|
| Power | 3,5W |
| Installation | Portable |
| Color Temperature | 3.000K |
| Lumens | 460 lm |
| Material | Aluminium |
| Finishes | White / Black / Corten |

| Code | |
|---|---|
| | 4209 |
| | 4193 |
| | 4194 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 10 HOURS | 8 HOURS | 4.500 mAh | IP 65 | CRI ≥80 | 120° | +45°C -25°C | ON OFF | 1/4



New

## Sky solar sensor





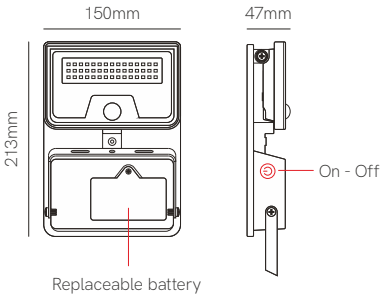


## Technical Information

| | |
|---|---|
| Power | 8W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 1.600 lm |
| Material | Polycarbonate |
| Finishes | White / Black |

| Code | |
|---|---|
| | ☐ 5572 |
| | ■ 5573 |

CE RoHS

3 YEARS WARRANTY | 2 YEARS WARRANTY | 30.000 HOURS | 9 HOURS | 10% 12H. 100% 2H. | 4.000 mAh | IP 54 | CRI ≥80 | 120° | 4-6m | PIR SENSOR | ON | OFF | +45°C -20°C | 1/20

OUTDOOR




▶ VIDEO

# Industrial



| Ufo Lens switch<br>60W / 80W / 100W | Ufo Lens switch<br>90W / 120W / 150W |
|---|---|















## Technical Information

| | | |
|---|---|---|
| Power | Switch 60W / 80W / 100W | Switch 90W / 120W / 150W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 131-167 lm/W | 128-167 lm/W |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ● 5147 | ● 5148 |

## Accessories




Lira 100W/150W/200W
■ 4566

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

| Ufo Lens switch<br>120W / 160W / 200W | Ufo Lens switch<br>140W / 190W / 240W |
|---|---|















## Technical Information

| | | |
|---|---|---|
| Power | Switch 120W / 160W / 200W | Switch 140W / 190W / 240W |
| Installation | Surface | Surface |
| Color Temperature | Switch 3.000K / 4.000K / 5.000K | Switch 3.000K / 4.000K / 5.000K |
| Lumens | 123-169 lm/W | 125-156 lm/W |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ● 5149 | ● 5150 |

## Accessories




Lira 100W/150W/200W
■ 4566




Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

| Ufo Lens Dali 100W | Ufo Lens Dali 150W |
|---|---|





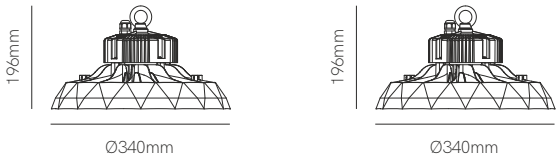


## Technical Information

| | | |
|---|---|---|
| Power | 100W | 150W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K / 5.000K |
| Lumens | 16.000 lm / 16.200 lm | 24.000 lm / 24.200 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |

| Code | | |
|---|---|---|
| | ● 4.000K 4915 | ● 4.000K 4917 |
| | ● 5.000K 4916 | ● 5.000K 4918 |

## Accessories




Lira 100W/150W/200W
■ 4566

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1

## Ufo Lens Dali 200W








## Ufo Lens Dali 240W








## Technical Information

| | Ufo Lens Dali 200W | Ufo Lens Dali 240W |
|---|---|---|
| Power | 200W | 240W |
| Installation | Surface | Surface |
| Color Temperature | 4.000K / 5.000K | 4.000K |
| Lumens | 32.000 lm / 32.200 lm | 38.400 lm |
| Material | Aluminium | Aluminium |
| Finishes | Black | Black |
| Code | ● 4.000K 4919<br>● 5.000K 4920 | ● 4.000K 4921 |

## Accessories




Lira 100W/150W/200W
■ 4566




Lira 240W
■ 4567

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 60° 90° 120° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | DALI 2 | 1

INDUSTRIAL






## Rotable Lens










### Ufo lens 100W

| 1m | 5m | 11m |
|---|---|---|
| 9.113 lx | 365 lx | 75 lx |

| 1m | 5m | 10m |
|---|---|---|
| 7.867 lx | 315 lx | 79 lx |

| 1m | 5m | 10m |
|---|---|---|
| 6.638 lx | 266 lx | 66 lx |

### Ufo lens 150W

| 1m | 7m | 14m |
|---|---|---|
| 13.670 lx | 279 lx | 70 lx |

| 1m | 6m | 13m |
|---|---|---|
| 11.800 lx | 328 lx | 70 lx |

| 1m | 6m | 12m |
|---|---|---|
| 9.956 lx | 277 lx | 69 lx |

### Ufo lens 200W

| 1m | 8m | 16m |
|---|---|---|
| 18.226 lx | 225 lx | 71 lx |

| 1m | 7m | 15m |
|---|---|---|
| 15.733 lx | 321 lx | 70 lx |

| 1m | 7m | 14m |
|---|---|---|
| 13.275 lx | 271 lx | 68 lx |

### Ufo lens 240W

| 1m | 9m | 19m |
|---|---|---|
| 26.635 lx | 329 lx | 74 lx |

| 1m | 9m | 19m |
|---|---|---|
| 26.654 lx | 292 lx | 73 lx |

| 1m | 9m | 19m |
|---|---|---|
| 15.882 lx | 324 lx | 68 lx |



Position the DIP switches to set the power.

| 1 | 2 | 3 | 4 | W | lm |
|---|---|---|---|---|---|
| ON | ON | ON | ON | 320W | 47.040lm |
| ON | ON | ON | OFF | 300W | 44.100lm |
| ON | ON | OFF | ON | 290W | 42.630lm |
| ON | ON | OFF | OFF | 275W | 40.425lm |
| ON | OFF | ON | ON | 260W | 38.220lm |
| ON | OFF | ON | OFF | 245W | 36.015lm |
| ON | OFF | OFF | ON | 230W | 33.810lm |
| ON | OFF | OFF | OFF | 215W | 31.605lm |
| OFF | ON | ON | ON | 200W | 29.400lm |
| OFF | ON | ON | OFF | 185W | 27.195lm |
| OFF | ON | OFF | ON | 170W | 24.990lm |

DIP Switch

Dual In-line Package




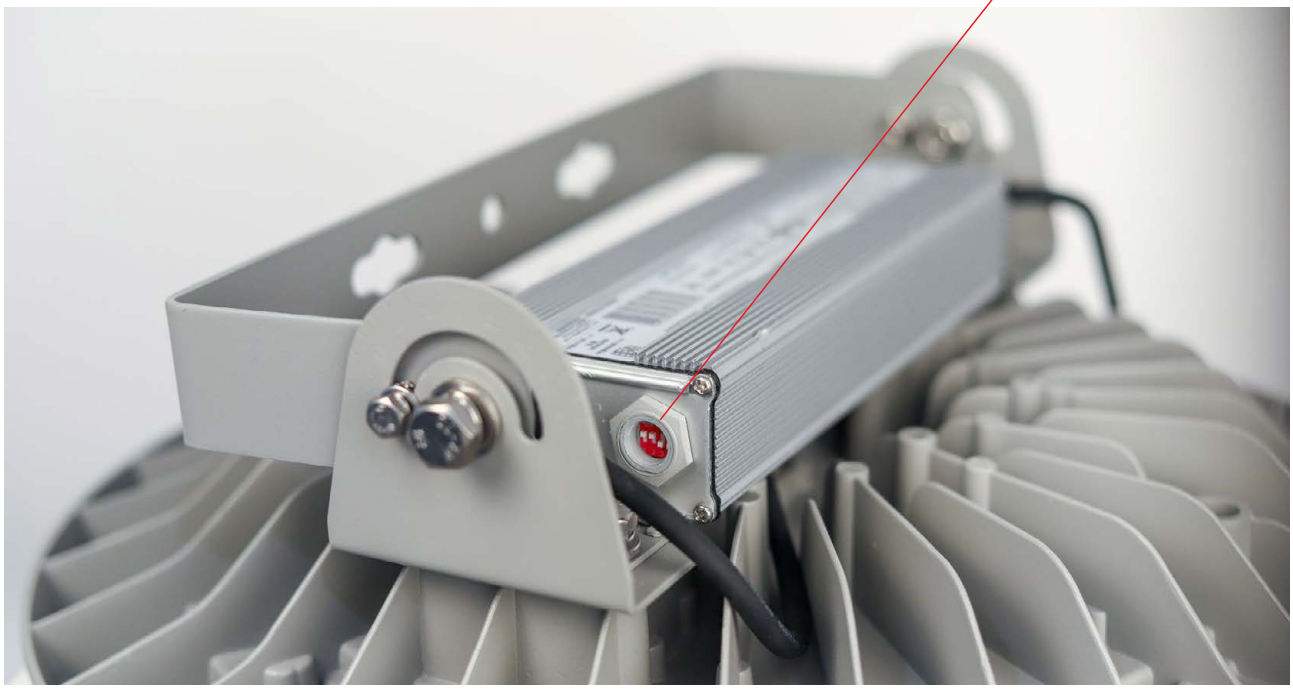

## Ufo 300W








| 1m | 7m | 14m |
|---|---|---|
| 14.401 lx | 294 lx | 73lx |

## Technical Information

| | |
|---|---|
| Power | 300W |
| Installation | Surface |
| Color Temperature | 4.000K |
| Lumens | 39.000 lm |
| Material | Aluminium |
| Finishes | Gray |

| | |
|---|---|
| Code | 4.000K 3972 |

CE RoHS EMC

*Lira included.

5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | CABLE 2M | 110° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | 1



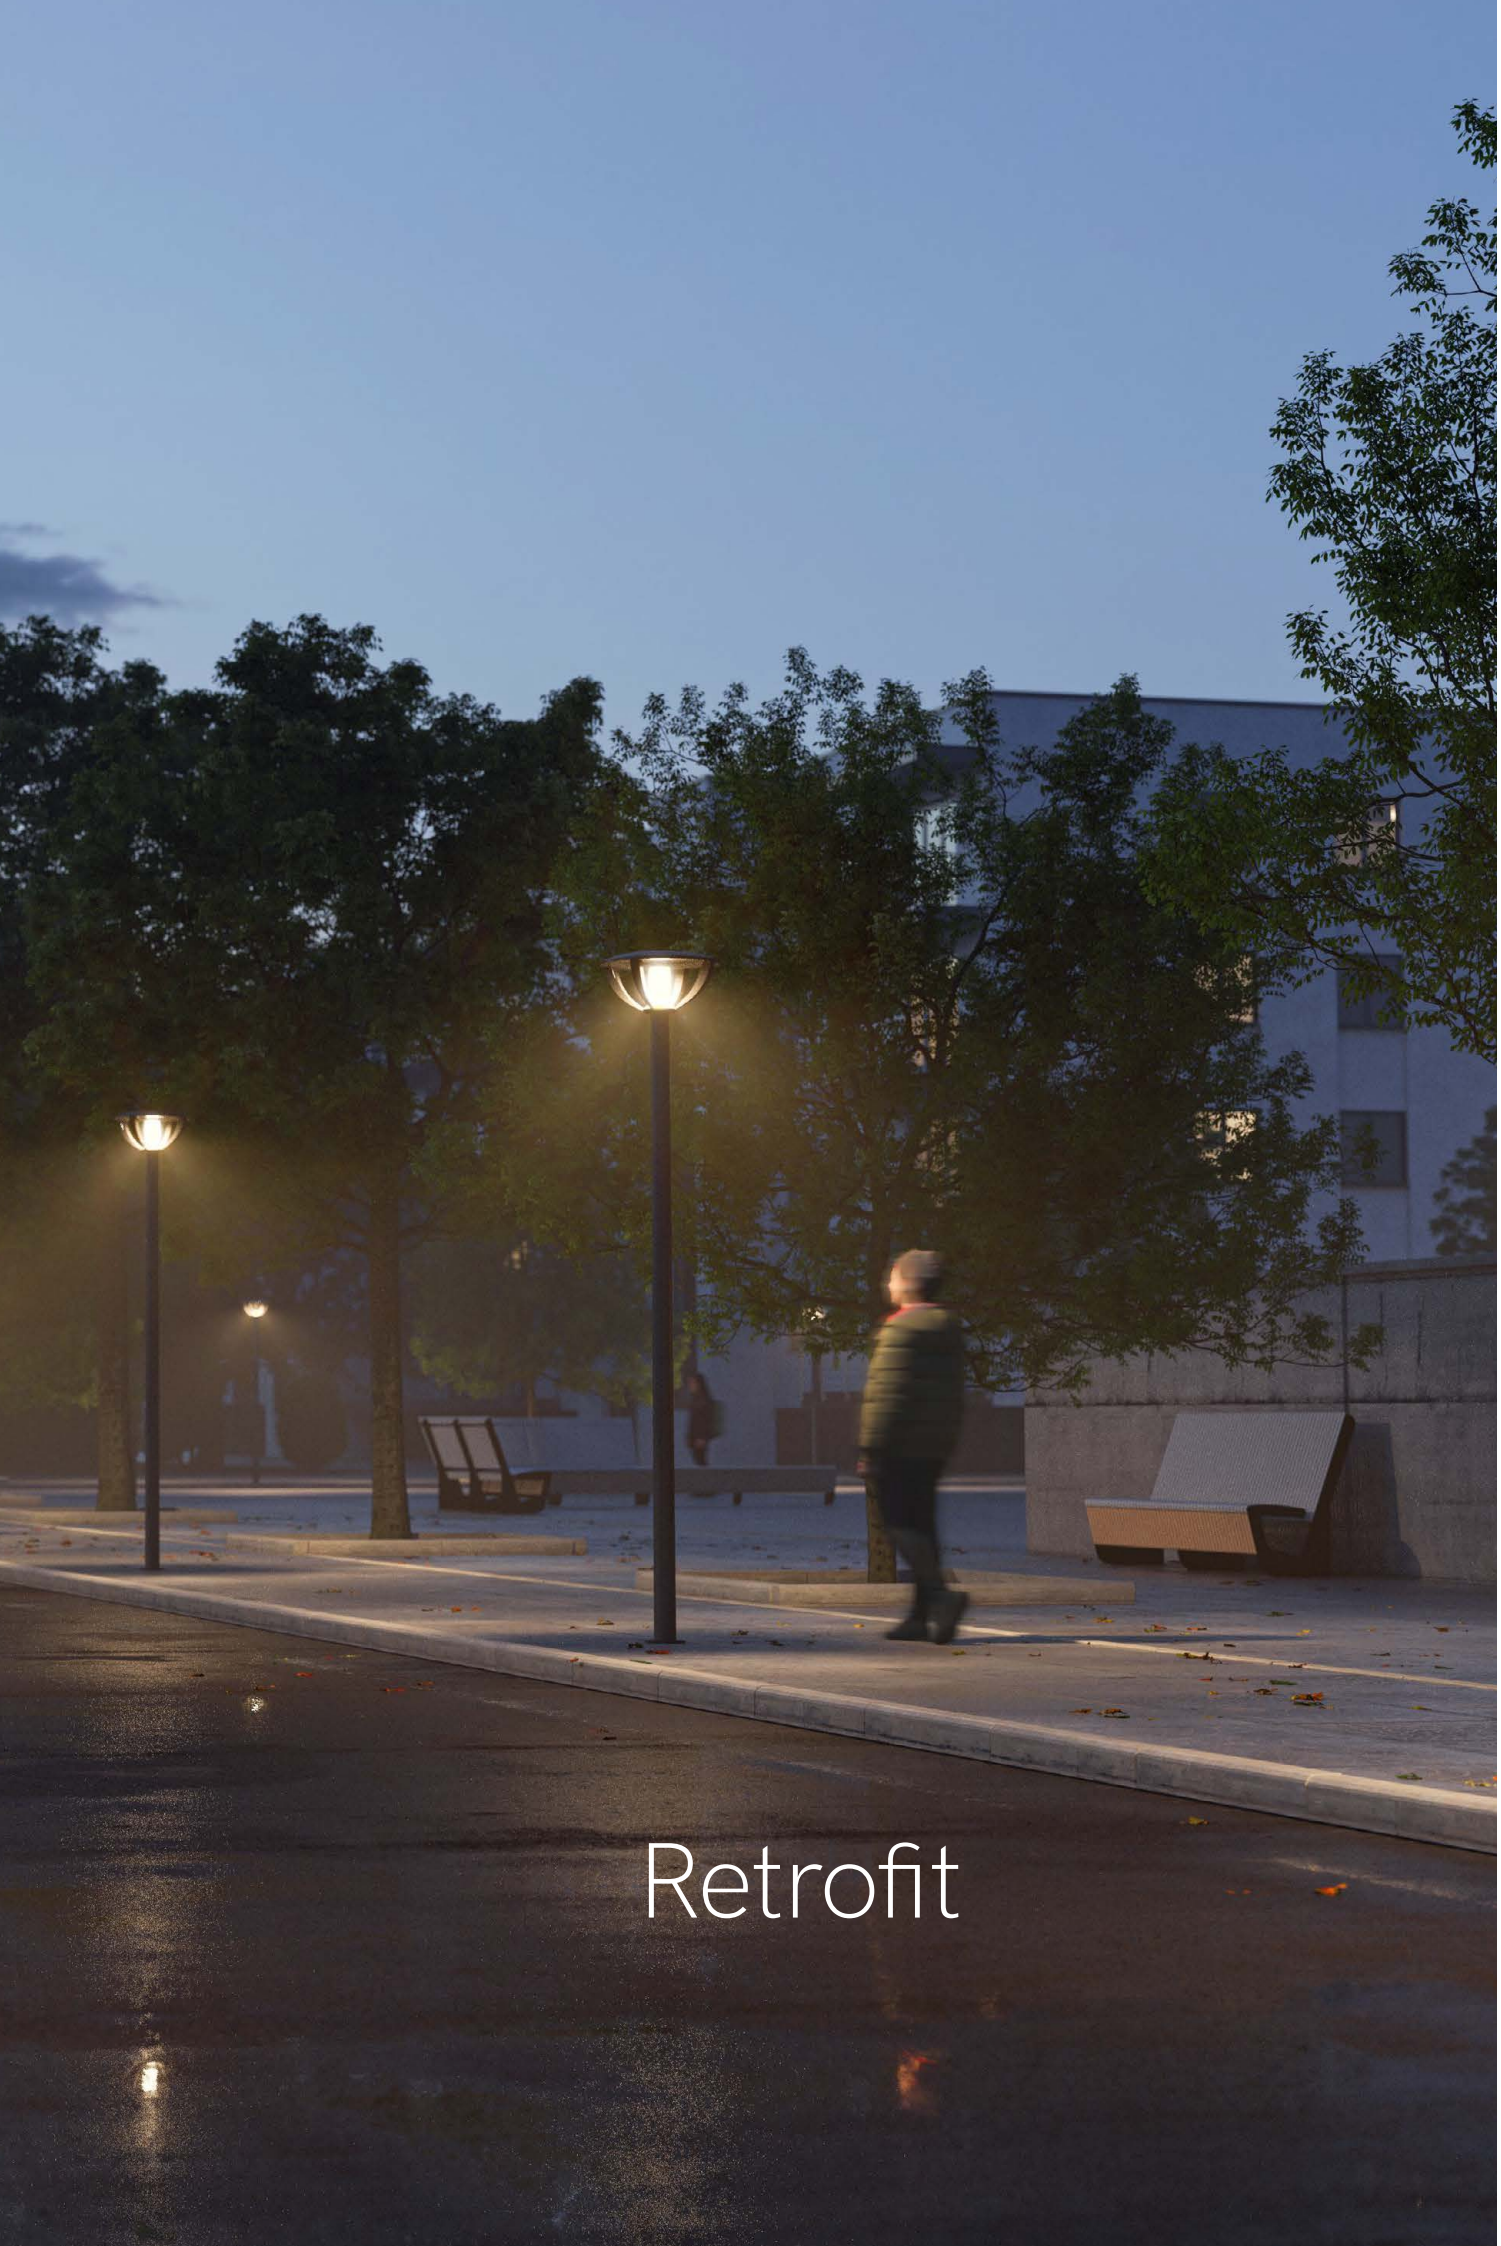

# Retrofit

## Tutto MR11








## Tutto GU10








## Technical Information

| | | |
|---|---|---|
| Power | 4W | 4W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 240 lm / 250 lm / 260 lm | 285 lm / 300 lm / 315 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 3447 | 2.700K | 3444 |
| | 3.000K | 3448 | 3.000K | 3445 |
| | 4.000K | 3449 | 4.000K | 3446 |
| | 12V AC/DC | | 220/240 VAC | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

| Hook GU10 | Hook GU10 dimmable |
|---|---|















## Technical Information

| | | |
|---|---|---|
| Power | 6W | 6W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 570 lm / 594 lm / 616 lm | 570 lm / 594 lm / 616 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 4023 | 2.700K | 3654-N |
| | 3.000K | 4024 | 3.000K | 3655-N |
| | 4.000K | 4025 | 4.000K | 3656-N |

TRIAC DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

| Uniform-line MR16 | Uniform-line GU10 | Uniform-line GU10 dimmable |
|---|---|---|
















## Technical Information

| | Uniform-line MR16 | Uniform-line GU10 | Uniform-line GU10 dimmable |
|---|---|---|---|
| Power | 6W | 6W | 6W |
| Color Temperature | 2.700K/3.000K/4.000K/5.000K | 2.700K/3.000K/4.000K/5.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 480 lm/510 lm/545 lm/560 lm | 480 lm/510 lm/545 lm/560 lm | 490 lm / 500 lm / 530 lm |

| Code | | | | | |
|---|---|---|---|---|---|
| | 2.700K | 4019-V2 | 2.700K | 4015-V2 | 2.700K 4227 |
| | 3.000K | 4020-V2 | 3.000K | 4016-V2 | 3.000K 4228 |
| | 4.000K | 4021-V2 | 4.000K | 4017-V2 | 4.000K 4229 |
| | 5.000K | 4022-V2 | 5.000K | 4018-V2 | |

12V AC/DC | 220/240 VAC | 220/240 VAC | TRIAC DIMM

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

## Narrow GU10 dimmable








## Technical Information

| | |
|---|---|
| Power | 7W |
| Color Temperature | 2.700K / 3.000K |
| Lumens | 400 lm / 420 lm |

| | | |
|---|---|---|
| Code | 2.700K | 4672 |
| | 3.000K | 4671 |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 15° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50

| System MR16 | System GU10 | System GU10 dimmable |
|---|---|---|






















## Technical Information

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 8W | | 8W | | | 8W | | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | | |
| Lumens | 725 lm / 780 lm / 825 lm | | 725 lm / 780 lm / 825 lm | | | 660 lm / 700 lm / 750 lm | | |
| Code | 2.700K | 3435-N | 2.700K | 3432-N | | 2.700K | 3492-N | |
| | 3.000K | 3436-N | 3.000K | 3433-N | | 3.000K | 3493-N | |
| | 4.000K | 3437-N | 4.000K | 3434-N | | 4.000K | 3494-N | |
| | 12V AC/DC | | 220/240 VAC | | | 220/240 VAC | TRIAC DIMM | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

## R-63 s-line GU10








## Technical Information

| | |
|---|---|
| Power | 8W |
| Color Temperature | 2.700K |
| Lumens | 720 lm |
| Code | 4003 |

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

## Power MR16








## Power GU10








## Power GU10 dimmable








### Technical Information

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 12W | | | 10W / 12W | | | 12W | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | | | 2.700K / 3.000K / 4.000K | |
| Lumens | 900 lm / 950 lm / 1.000 lm | | | 950 lm / 1.000 lm / 1.050 lm | | | 950 lm / 1.000 lm / 1.050 lm | |
| Code | 2.700K | 3441 | | 12W 2.700K | 3438 | | 2.700K | 3489 |
| | 3.000K | 3442 | | 10W 3.000K | 4295 | | 3.000K | 3490 |
| | 4.000K | 3443 | | 10W 4.000K | 4296 | | 4.000K | 3491 |
| | | | 12V AC/DC | | | 220/240 VAC | | 220/240 VAC \| TRIAC DIMM |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C -20°C | 10/50

## Lynk G53




## Lynk GU10




## Lynk GU10 dimmable




### Technical Information

| | Lynk G53 | Lynk GU10 | Lynk GU10 dimmable |
|---|---|---|---|
| Power | 13W | 13W | 13W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 880 lm / 900 lm / 950 lm | 880 lm / 900 lm / 950 lm | 880 lm / 900 lm / 950 lm |
| Code | 2.700K 3452 | 2.700K 3455 | 2.700K 3464 |
| | 3.000K 3453 | 3.000K 3456 | 3.000K 3465 |
| | 4.000K 3454 | 4.000K 3457 | 4.000K 3466 |
| | 12V AC/DC | 220/240 VAC | 220/240 VAC \| TRIAC DIMM |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

AR111 15° G53






AR111 15° GU10






## Technical Information

| | | |
|---|---|---|
| Power | 15W | 15W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.350 lm / 1.400 lm / 1.500 lm | 1.350 lm / 1.400 lm / 1.500 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 5187 | 2.700K | 5190 |
| | 3.000K | 5188 | 3.000K | 5191 |
| | 4.000K | 5189 | 4.000K | 5192 |
| | PF >0,5 \| 12V AC/DC | | PF >0,9 \| 220/240 VAC | |

CE RoHS EMC

3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C -20°C | 10/30

## Nitro GU10








## Dole GU10








## Technical Information

| | | |
|---|---|---|
| Power | 15W | 15W |
| Color Temperature | 2.700K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.000 lm | 1.050 lm / 1.100 lm / 1.120 lm |

| | | | |
|---|---|---|---|
| Code | 3470 | 2.700K | 3467 |
| | | 3.000K | 3468 |
| | | 4.000K | 3469 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C -20°C | 10/30

## Shop E14






## Prisma E14






### Technical Information

| | | |
|---|---|---|
| Power | 2W | 4W |
| Color Temperature | 3.000K | 3.000K |
| Lumens | 180 lm | 340 lm |
| Code | 3450 | 3474-M |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,3 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Flama E14/E27






## Flama dimmable E14






### Technical Information

| | | |
|---|---|---|
| Power | 5,5W | 5,5W |
| Color Temperature | 2.700K / 3.000K / 5.000K | 3.000K |
| Lumens | 450 lm / 500 lm / 550 lm | 418 lm |

| Code | | | | | |
|---|---|---|---|---|---|
| | 2.700K | E14 | 592122-FL2 | 3.000K | 592122R-C3 |
| | 2.700K | E27 | 592122-FL2E | | |
| | 3.000K | E14 | 592122-FL3 | | |
| | 3.000K | E27 | 592122-FLE3 | | |
| | 5.000K | E14 | 3534 | | |

TRIAC DIMM

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Esférica 5W E14/E27






## Esférica 5,5W E14/E27 dimmable






## Esférica 7W E14/E27






### Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 5W | | 5,5W | | 7W | | |
| Color Temperature | 2.700K/3.000K/4.000K/5.000K | | 2.700K / 3.000K / 4.000K | | 2.700K/3.000K/4.000K/5.000K | | |
| Lumens | 440 lm/462 lm/484 lm/495 lm | | 396 lm / 418 lm / 440 lm | | 700 lm/750 lm/800 lm/820 lm | | |
| Code | 2.700K | E14 | 592563-4C2(N) | 2.700K | E14 | 592563R-C2 | 2.700K | E14 | 4243 |
| | 2.700K | E27 | 5925631-4C2(N) | 2.700K | E27 | 592563R1-C2 | 2.700K | E27 | 4244 |
| | 3.000K | E14 | 592563(N)-4C(N2) | 3.000K | E14 | 592563R-C3 | 3.000K | E14 | 4245 |
| | 3.000K | E27 | 5925631(N)-4C(N2) | 3.000K | E27 | 592563R1-C3 | 3.000K | E27 | 4246 |
| | 4.000K | E14 | 592563(N)-4F(N2) | 4.000K | E14 | 592563R-F4 | 4.000K | E14 | 4247 |
| | 4.000K | E27 | 5925631(N)-4F(N2) | 4.000K | E27 | 592563R1-F4 | 4.000K | E27 | 4248 |
| | 5.000K | E14 | 3538(N) | | | | 5.000K | E14 | 4249 |
| | 5.000K | E27 | 3537(N) | | | | 5.000K | E27 | 4250 |
| | 5 YEARS WARRANTY \| 50.000 HOURS \| IP 40 | | | 3 YEARS WARRANTY \| 25.000 HOURS \| IP 40 \| TRIAC DIMM | | | 3 YEARS WARRANTY \| 25.000 HOURS \| IP 20 | | |

CE RoHS EMC

220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Standard 6W E27






## Standard 9W E27






## Technical Information

| | 6W | 9W |
|---|---|---|
| Power | 6W | 9W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K/3.000K/4.000K/5.000K |
| Lumens | 534 lm / 550 lm / 660 lm | 880 lm/891 lm/935 lm/945 lm |

| Code | | | | |
|---|---|---|---|---|
| | 2.700K | 592125S-6(N) | 2.700K | 592125SC-2(N) |
| | 3.000K | 592125S-6C(N) | 3.000K | 592125SC-3(N) |
| | 4.000K | 592125S-6F(N) | 4.000K | 592125SC-4(N) |
| | | | 5.000K | 3539(N) |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

Standard 12W E27






Standard 15W E27






## Technical Information

| | | |
|---|---|---|
| Power | 12W | 15W |
| Color Temperature | 2.700K / 3.000K / 4.000K | 2.700K / 3.000K / 4.000K |
| Lumens | 1.100 lm / 1.122 lm / 1.144 lm | 1.550 lm / 1.600 lm / 1.650 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.700K | 3479(N) | 2.700K | 3482(N) |
| | 3.000K | 3480(N) | 3.000K | 3483(N) |
| | 4.000K | 3481(N) | 4.000K | 3484(N) |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

| Standard 10W E27 dimmable | Standard 12W E27 dimmable | Standard 17W E27 dimmable |
|---|---|---|
















## Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 10W | | 12W | | 17W | | |
| Color Temperature | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | | 2.700K/3.000K/4.000K/5.000K | | |
| Lumens | 880 lm / 891 lm / 935 lm | | 1.100 lm / 1.122 lm / 1.144 lm | | 1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm | | |
| Code | 2.700K | 592125R-C | 2.700K | 592125R2-C | 2.700K | 3527 | |
| | 3.000K | 592125R-C3 | 3.000K | 592125R2-C3 | 3.000K | 3528 | |
| | 4.000K | 592125R-F | 4.000K | 592125R2-F | 4.000K | 3529 | |
| | | | | | 5.000K | 3530 | |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | TRIAC DIMM | +40°C -20°C | 10/50

| Micro globo 6W E27 | Globo 10W E27 | Globo 10W E27 dimmable |
|---|---|---|
















## Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 6W | | 10W | | 10W | | |
| Color Temperature | 2.700K / 3.000K | | 2.700K / 3.000K / 4.000K | | 3.000K | | |
| Lumens | 480 lm / 500 lm | | 1.100 lm / 1.130 lm / 1.180 lm | | 800 lm | | |
| Code | 2.700K | 505143E-C | 2.700K | 3524 | 3.000K | 505119DIM-C | |
| | 3.000K | 3881 | 3.000K | 3525 | | | |
| | | | 4.000K | 3526 | | | |
| | 5 YEARS WARRANTY \| 50.000 HOURS | | 3 YEARS WARRANTY \| 25.000 HOURS | | 3 YEARS WARRANTY \| 25.000 HOURS \| TRIAC DIMM | | |

CE RoHS EMC

IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40

## Globo 15W E27






## Globo 16W E27






## Globo 22W E27






### Technical Information

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Power | 15W | | 16W | | 22W | |
| Color Temperature | 2.700K / 4.000K | | 2.700K / 3.000K / 4.000K | | 2.700K / 3.000K / 4.000K | |
| Lumens | 1.400 lm / 1.500 lm | | 1.600 lm / 1.700 lm / 1.750 lm | | 2.400 lm / 2.500 lm / 2.600 lm | |
| Code | 2.700K | 4677 | 2.700K | 3521 | 2.700K | 3518 |
| | 4.000K | 4678 | 3.000K | 3522 | 3.000K | 3519 |
| | | | 4.000K | 3523 | 4.000K | 3520 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/40

| R-39 E14 | R-50 E14 | R-63 E27 |
|---|---|---|
|  |  |  |










R-39 R-50 R-63

## Technical Information

| | | | |
|---|---|---|---|
| Power | 3W | 5W | 8W |
| Color Temperature | 3.000K | 3.000K | 3.000K |
| Lumens | 308 lm | 385 lm | 660 lm |
| Code | 592122R39-2 | 5920731-(N2) | 592072-1 |
| | IP 40 | IP 40 | IP 20 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/50

| R-80 E27 | R-90 2.200K E27 | R-90 3.000K E27 |
|---|---|---|
|  |  |  |










R-80 R-90

## Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 12W | 12W |
| Color Temperature | 3.000K | 2.200K | 3.000K |
| Lumens | 891 lm | 850 lm | 1.100 lm |
| Code | 592076-C3(N) | 4137 | 592074-C(N) |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40

## Pl T40 E27






### Technical Information

| | |
|---|---|
| Power | 10W |
| Color Temperature | 3.000K / 4.000K |
| Lumens | 825 lm / 880 lm |

| | | |
|---|---|---|
| Code | 3.000K | 582L016T40E-C3 |
| | 4.000K | 582L016T40E-F |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

| Par 30 E27 | Par 38 3.000K E27 | Par 38 Green E27 |
|---|---|---|
|  |  |  |










PAR 30 PAR 38

## Technical Information

| | | | |
|---|---|---|---|
| Power | 10W | 15W | 15W |
| Color Temperature | 3.000K | 3.000K | GREEN |
| Lumens | 660 lm | 1.100 lm | 190 lm |
| Code | 171160P30-C | 171160P38(N)-C | 3579 |
| | 45° | 30° | 30° |

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

## Sil E27






### Technical Information

| | |
|---|---|
| Power | 20W |
| Color Temperature | 2.700K / 4.000K |
| Lumens | 2.035 lm / 2.550 lm |

| | | |
|---|---|---|
| Code | 2.700K | 592165SIL-C |
| | 4.000K | 592165SIL-F |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 360° | 50/60 Hz | +40°C -20°C | 6/24

## Aria 30W E27/E40






## Aria 50W E27/E40






## Technical Information

| | 30W | 50W |
|---|---|---|
| Power | 30W | 50W |
| Color Temperature | 2.700K / 5.000K | 2.700K / 5.000K |
| Lumens | 3.100 lm / 3.550 lm | 5.400 lm / 6.200 lm |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | 2.700K | E27 | 3854 | 2.700K | E27 | 3858 |
| | 2.700K | E40 | 3856 | 2.700K | E40 | 3860 |
| | 5.000K | E27 | 3855 | 5.000K | E27 | 3859 |
| | 5.000K | E40 | 3857 | 5.000K | E40 | 3861 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | > 1KV | ENCLOSED NO | 6/24

## Obo 19W E27






## Obo 27W E27






### Technical Information

| | | |
|---|---|---|
| Power | 19W | 27W |
| Color Temperature | 2.200K / 5.000K | 2.200K / 5.000K |
| Lumens | 1.425 lm / 1.900 lm | 2.025 lm / 3.000 lm |

| | | | | |
|---|---|---|---|---|
| Code | 2.200K | 3909 | 2.200K | 3910 |
| | 5.000K | 3917 | 5.000K | 3918 |

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16

## Obo 36W E27/E40






## Obo 45W E27/E40






## Technical Information

| | 36W | 45W |
|---|---|---|
| Power | 36W | 45W |
| Color Temperature | 2.200K / 5.000K | 2.200K / 5.000K |
| Lumens | 2.700 lm / 3.900 lm | 3.375 lm / 4.500 lm |

| Code | | | | | | |
|---|---|---|---|---|---|---|
| | 2.200K | E27 | 3911 | 2.200K | E27 | 3912 |
| | 2.200K | E40 | 3920 | 2.200K | E40 | 3923 |
| | 5.000K | E27 | 3919 | 5.000K | E27 | 3922 |
| | 5.000K | E40 | 3921 | 5.000K | E40 | 3924 |

CE RoHS EMC

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 170° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK | 16

## Smile 20W E27






## Smile 40W E27






## Smile 60W E40






### Technical Information

| | | | | | | |
|---|---|---|---|---|---|---|
| Power | 20W | | 40W | | 60W | |
| Color Temperature | 2.200K / 5.000K | | 2.200K / 5.000K | | 2.200K / 5.000K | |
| Lumens | 2.000 lm / 3.000 lm | | 4.000 lm / 6.000 lm | | 6.000 lm / 9.000 lm | |
| Code | 2.200K | 3913 | 2.200K | 3914 | 2.200K | 3915 |
| | 5.000K | 3925 | 5.000K | 3926 | 5.000K | 3927 |
| | 24 | | 12 | | 12 | |

CE RoHS

5 YEARS WARRANTY | 50.000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSED OK

## Cup 45W E27/E40






### Technical Information

| | |
|---|---|
| Power | 45W |
| Color Temperature | 3.000K |
| Lumens | 3.960 lm |

| Code | | |
|---|---|---|
| 3.000K | E27 | 592141-C3E2 |
| 3.000K | E40 | 592141-E4C3 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 100° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 6

## Noa 80W E27/E40






## Noa 85W E27/E40






## Technical Information

| | | |
|---|---|---|
| Power | 80W | 85W |
| Color Temperature | 2.200K | 2.700K / 5.000K |
| Lumens | 5.900 lm | 9.700 lm / 10.200 lm |

| | | | | | | |
|---|---|---|---|---|---|---|
| Code | 2.200K | E27/ E40 | 3965 | 2.700K | E27 | 3902 |
| | | | | 2.700K | E40 | 3900 |
| | | | | 5.000K | E27 | 3903 |
| | | | | 5.000K | E40 | 3901 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | ENCLOSED NO | 8

## Adn G4






### Technical Information

| | |
|---|---|
| Power | 2,5W |
| Color Temperature | 3.000K |
| Lumens | 198 lm |

| | |
|---|---|
| Code | 130L006 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,6 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Uniform-line G4






## Uniform-line long G4






## Technical Information

| | | |
|---|---|---|
| Power | 1,3W | 1,6W |
| Color Temperature | 3.000K / 5.000K | 3.000K / 5.000K |
| Lumens | 150 lm / 158 lm | 203 lm / 223 lm |

| | | | | |
|---|---|---|---|---|
| Code | 3.000K | 130L006-2 | 3.000K | 130L195-C |
| | 5.000K | 130L006-2F | 5.000K | 130L195-D |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Uniform-line G9






## Uniform-line long G9






## Technical Information

| | | | | |
|---|---|---|---|---|
| Power | 2,5W | | 2,8W | |
| Color Temperature | 3.000K / 5.000K | | 3.000K / 5.000K | |
| Lumens | 242 lm / 250 lm | | 308 lm / 314 lm | |
| Code | 3.000K | 130L184-5 | 3.000K | 130L195-A |
| | 5.000K | 130L184-5F | 5.000K | 130L195-B |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 10/50

## Max BA15d








## Technical Information

| | |
|---|---|
| Power | 7W |
| Color Temperature | 2.700K |
| Lumens | 500 lm |

| | |
|---|---|
| Code | 3569 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30

## Cala 9W G24






## Cala 10W G24






## Technical Information

| | | |
|---|---|---|
| Power | 9W | 10W |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 880 lm / 935 lm | 1.100 lm / 1.155 lm |

| | | | | |
|---|---|---|---|---|
| Code | 3.000K | 582L015-C3 | 3.000K | 582L015-C3B |
| | 4.000K | 582L015-F4 | 4.000K | 582L015-F4B |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C -20°C | 10/50

| Lineal tubular 5W R7S | Lineal tubular 9W R7S | Lineal tubular 9W R7S dimmable |
|---|---|---|
















## Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 5W | | 9W | | 9W | | |
| Color Temperature | 3.000K / 4.000K | | 3.000K / 4.000K | | 3.000K / 4.000K | | |
| Lumens | 561 lm / 574 lm | | 935 lm / 1.000 lm | | 935 lm / 1.000 lm | | |
| Code | 3.000K | 140026-C3T | 3.000K | 141123-TC3 | 3.000K | 141123-TC3D | |
| | 4.000K | 140026-F4T | 4.000K | 141123-TF4 | 4.000K | 141123-TF4D | |
| | | 3 YEARS WARRANTY | | 3 YEARS WARRANTY | | 4 YEARS WARRANTY | TRIAC DIMM |

CE RoHS

25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C | 6/30

## Lineal 9W R7S






## Lineal tubular 11W R7S dimmable






## Lineal 13W R7S






### Technical Information

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 9W | | 11W | | 13W | | |
| Color Temperature | 3.000K / 4.000K | | 3.000K / 4.000K | | 3.000K / 4.000K / 5.000K | | |
| Lumens | 858 lm / 880 lm | | 1.210 lm / 1.280 lm | | 1.700 lm / 1.780 lm / 1.800 | | |
| Code | 3.000K | 140L026L | 3.000K | 3477 | 3.000K | 3904 | |
| | 4.000K | 140L0261L | 4.000K | 3478 | 4.000K | 3905 | |
| | | | | | 5.000K | 3906 | |

IP 20 | 120° | IP 40 | 360° | TRIAC DIMM | IP 40 | 160°

CE RoHS EMC

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 6/30

## HQI tubular E27






## HQI tubular G12






## HQI tubular RX7S






### Technical Information

| | HQI tubular E27 | HQI tubular G12 | HQI tubular RX7S |
|---|---|---|---|
| Power | 10W | 10W | 13W |
| Color Temperature | 3.000K / 4.000K | 3.000K / 4.000K | 3.000K / 4.000K |
| Lumens | 1.000 lm / 1.030 lm | 1.000 lm / 1.030 lm | 1.320 lm / 1.375 lm |
| Code | 3.000K 3570 | 3.000K 592063-G12/3 | 3.000K 592063-TC |
| | 4.000K 3571 | 4.000K 592063-G12/4 | 4.000K 592063-TF |
| | 10/50 | 10/50 | 6/30 |

CE RoHS

3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C -20°C

# Conditions




PRICES UPDATE - INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.

TARIFA BENEITO FAURE - ACTUALIZACIÓN DIGITAL – PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.

GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. B E N E I T O FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obliged it to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to sate explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage.
Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistera la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui proprio prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso.Il listino prezzi e' inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e puo' essere aggiornato in qualsiasi momento se necessario.I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sara' processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso e' necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegre sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra..I resi non vengo rimborsati e devo essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il presso variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si fara' carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovra' essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sara' sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si fara' carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato.La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed e' necessario l'invio della contesazione via mail.La garanzia del prodotto si trova all'interno dell'imballo.Il dipartimento tecnico di BENEITO FAURE sara' l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. B E N E I T O  F A U R E quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sara' valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non e' installato come da istruzioni
3. La ventilazione del prodotto non e' adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di propriertà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto.La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore.In caso di unione, trasformazione e/o adesione dei prodotti sotto la di proprieta' di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE.In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, cosi come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extra-contrattuale, ecc.Il cliente sarà obbligato  in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato  a fornirla. Se prima di effettuare il pagamento totale , la merce venduta fosse soggetta a qualsiasi tipo di sequestro o  blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà  le cui spese saranno a carico del cliente.

ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

DLIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung.Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.
BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produktes.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen ahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursaran hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS.
Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Éstas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.
Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.
Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.
El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:
1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o accesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la accesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por perdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o traba, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

# Alphabetical Index (Name - Page)


| | |
|---|---|
| Accesories custom system | 162 |
| Accesories led strips | 310 |
| Adapter 3PH | 317 |
| Adn G4 | 705 |
| Air recessed | 445 |
| Alfa 3PH | 339 |
| Alp 48V | 371 |
| Alp 48V suspension | 371 |
| Alp space | 499 |
| Alp surface | 465 |
| AR111 15° G53 | 684 |
| AR111 15° GU10 | 684 |
| Argo recessed | 409 |
| Argo XL recessed | 409 |
| Aria 30W E27 / E40 | 699 |
| Aria 50W E27 / E40 | 699 |
| Ark suspension recessed | 511 |
| Ark suspension surface | 511 |
| Artis r wall | 545 |
| Artis sq wall | 545 |
| Aston 3PH | 329 |
| Atmos GU10 suspension | 517 |
| Atmos GU10 XL suspension | 517 |
| Atmos slim 48V IP | 401 |
| Atmos slim 48V mini | 353 |
| Atmos slim suspension | 513 |
| Atmos slim XL suspension | 513 |
| Atmos suspension | 515 |
| Atmos XL suspension | 515 |
| Atom recessed | 411 |
| Avant r recessed | 457 |
| Avant r surface | 491 |
| Avant sq recessed | 457 |
| Bag | 597 |
| Basculante recessed | 449 |
| Bathroom recessed | 455 |
| Beam wall | 553 |
| Bimba | 599 |
| Bit 48V IP | 403 |
| Blaber atmos | 159 |
| Blaber atmos slim | 159 |
| Blaber custom | 151 |
| Blaber evo | 153 |
| Blaber line | 149 |
| Blaber mac | 157 |
| Blaber mirrow | 153 |
| Blaber pick | 147 |
| Blaber r | 151 |
| Blaber sq | 152 |
| Blaber tax | 161 |
| Blaber trgl | 161 |
| Blaber zero direct | 155 |
| Blaber zero in XL | 155 |
| Blis r | 583 |
| Blis rect | 583 |
| Blis sq | 583 |
| Bonn recessed | 447 |
| Bora 48V suspension | 373 |
| Bora recessed | 427 |
| Bora space | 501 |
| Bora surface | 463 |
| Bora suspension recessed | 523 |
| Bora suspension surface | 523 |
| Bora XL space | 501 |
| Box 10 | 186 |
| Box 11 | 184 |
| Box 12 | 184 |
| Box 13 | 185 |
| Box 14 | 180 |
| Box 15 | 171 |
| Box 16 | 171 |
| Box 17 | 172 |
| Box 18 | 172 |
| Box 19 | 186 |
| Box 21 | 198 |
| Box 22 | 194 |
| Box 23 | 173 |
| Box 24 | 189 |
| Box 27 | 199 |
| Box 28 | 205 |
| Box 29 | 207 |
| Box 30 12mm | 209 |
| Box 30 20mm | 209 |
| Box 32 | 193 |
| Box 33 | 195 |
| Box 35 | 179 |
| Box 37 | 187 |
| Box 38 | 179 |
| Box 39 | 204 |
| Box 43 | 176 |
| Box 53 | 173 |
| Box 60 | 181 |
| Box 65 | 201 |
| Box 67 | 203 |
| Box 68 | 193 |
| Box 69 | 191 |
| Box 71 | 180 |
| Box 73 | 208 |
| Box 74 | 176 |
| Box 75 | 177 |
| Box 87 | 175 |
| Box 92 | 175 |
| Box 95 | 177 |
| Box 98 railing | 197 |
| Box 99 | 183 |
| Bulbholder GU10 | 449 |
| Caddie | 615 |
| Cala 10W G24 | 709 |
| Cala 9W G24 | 709 |
| Cam | 643 |
| Cam XL | 643 |
| Casambi magnet track control | 369 |
| Ceiling fixing 3PH recessed | 319 |
| Ceiling fixing 3PH surface | 317 |
| Central corner connector 48V | 367 |
| Central corner connector mini | 349 |
| Circus in | 119 |
| Circus in XL | 117 |
| Circus out | 119 |
| Circus out XL | 117 |
| Clos base | 641 |
| Clos base mini | 641 |
| Clos dual base | 641 |
| Clos dual base mini | 641 |
| Clos wall | 565 |
| Clos wall dual | 565 |
| Comet | 579 |
| Compac r recessed | 431 |
| Compac sq recessed | 431 |
| Concord 48V mini | 359 |
| Concord surface | 469 |
| Control basic | 300 |
| Control Casambi | 296 |
| Control Dali push | 304 |
| Control Dali push | 303 |
| Control Dali push triac | 303 |
| Control Dali SPI APP | 303 |
| Control Dali touch | 303 |
| Control DMX | 301 |
| Control driver RF / push | 305 |
| Control PMW / RF | 302 |
| Control push / triac | 302 |
| Control SPI | 301 |
| Control top | 300 |
| Control Tuya | 295 |
| Converse | 601 |
| Cookie 3PH | 325 |
| Cookie 48V | 391 |
| Cookie 48V suspension | 391 |
| Cookie suspension base | 525 |

# Alphabetical Index (Name - Page)


| | |
|---|---|
| Crown 3PH | 337 |
| Crown base | 483 |
| Cup 45W E27 / E40 | 703 |
| Curve / straight end cap 48V | 367 |
| Curve Line 48V | 377 |
| Curve magnet track 48V surface | 367 |
| Curve Tram 48V | 375 |
| Dau | 105 |
| Dau E | 105 |
| Diro 48V | 379 |
| Dis | 539 |
| Dole GU10 | 685 |
| Dot 48V | 389 |
| Dual | 79 |
| Dynamic control | 291 |
| Eclipse recessed | 449 |
| Egna | 657 |
| End cap 3PH | 317 |
| End cap 48V recessed | 367 |
| End cap 48V surface | 367 |
| End cap IP | 397 |
| End cap mini surface / recessed | 349 |
| Esférica 5,5W E14 / E27 dimm. | 688 |
| Esférica 5W E14 / E27 | 688 |
| Esférica 7W E14 / E27 | 688 |
| Evo | 37 |
| Evo dual | 41 |
| Evo E | 45 |
| Evo fly | 39 |
| Evo mini | 43 |
| Evo mini track | 47 |
| Evo R | 43 |
| Evo track | 49 |
| Fade | 615 |
| Fijo recessed | 449 |
| Filter | 93 |
| Fine 25 | 279 |
| Fine 25 circle 48V | 393 |
| Fine 30 | 235 |
| Fine 31 | 223 |
| Fine 32 N | 239 |
| Fine 34 | 281 |
| Fine 36 | 248 |
| Fine 37 | 243 |
| Fine 41 | 222 |
| Fine 42 | 249 |
| Fine 43 | 254 |
| Fine 44 | 245 |
| Fine 45 | 263 |
| Fine 46 | 253 |
| Fine 47 | 262 |
| Fine 48 | 217 |
| Fine 49 | 241 |
| Fine 50 | 255 |
| Fine 51 | 237 |
| Fine 52 | 231 |
| Fine 54 | 251 |
| Fine 55 | 242 |
| Fine 56 | 234 |
| Fine 60 | 257 |
| Fine 61 | 228 |
| Fine 63 | 247 |
| Fine 64 | 216 |
| Fine 66 N | 259 |
| Fine 68 | 226 |
| Fine 69 | 221 |
| Fine 70 | 285 |
| Fine 71 | 261 |
| Fine 72 | 287 |
| Fine 74 | 289 |
| Fine 75 | 238 |
| Fine 76 | 229 |
| Fine 77 | 283 |
| Fine 79 | 227 |
| Fine 82 | 225 |
| Fine 84 | 220 |
| Fine 88 | 240 |
| Fine 92 | 224 |
| Fine 96 | 233 |
| Fine 97 | 219 |
| Fine DMX-4 | 273 |
| Fine DMX-5 | 275 |
| Fine running | 265 |
| Fine SPI-2 | 267 |
| Fine SPI-3 | 269 |
| Fine SPI-4 | 271 |
| Fix | 625 |
| Flama dimmable E14 | 687 |
| Flama E14 / E27 | 687 |
| Flash | 139 |
| Flexible joint 3PH | 317 |
| Forest | 81 |
| Frame 48V IP 1m | 399 |
| Frame 48V IP 2m | 399 |
| Frame 48V IP 3m | 399 |
| Front base space | 509 |
| Gam | 651 |
| Globo 10W E27 | 692 |
| Globo 10W E27 dimmable | 692 |
| Globo 15W E27 | 693 |
| Globo 16W E27 | 693 |
| Globo 22W E27 | 693 |
| Golf surface | 461 |
| Golf XL surface | 461 |
| Grip | 99 |
| Grow | 535 |
| Hat 48V suspension | 383 |
| Hat suspension recessed | 521 |
| Hat suspension surface | 521 |
| Holder space | 507 |
| Hook GU10 | 677 |
| Hook GU10 dimmable | 677 |
| Horizon | 137 |
| HQI tubular E27 | 712 |
| HQI tubular G12 | 712 |
| HQI tubular RX7S | 712 |
| Ice 48V IP | 405 |
| Ice XL 48V IP | 405 |
| Icon wall | 563 |
| Ilo | 533 |
| Ina | 539 |
| Iris | 659 |
| Kaa | 133 |
| Kaa line | 135 |
| Kom 3PH 20W | 333 |
| Kom 3PH 30W | 333 |
| Kom 3PH 40W | 333 |
| Konic 3PH | 329 |
| Kora r surface | 485 |
| Kora sq surface | 487 |
| Krion 300W | 639 |
| Krion 400W | 639 |
| Kubo | 87 |
| Kubo E | 87 |
| L joint 3PH recessed | 319 |
| L joint 3PH surface | 317 |
| L joint 48V ceiling recessed | 367 |
| L joint 48V ceiling surface | 367 |
| L joint ceiling IP | 397 |
| L joint ceiling mini recessed | 349 |
| L joint ceiling mini surface | 349 |
| L joint wall 48V ceiling recessed | 367 |
| L joint wall 48V ceiling surface | 367 |
| L joint wall ceiling inner mini recessed | 349 |
| L joint wall ceiling inner mini surface | 349 |
| L joint wall ceiling IP | 397 |
| L joint wall ceiling outer mini recessed | 349 |
| L joint wall ceiling outer mini surface | 349 |
| Lao | 531 |
| Led driver CC Dali | 304 |

Led driver CC triac 305
Lek r wall 561
Lek sensor 559
Lek sq wall 561
Lena 3PH 341
Lievo space 503
Lievo XL space 503
Lift 71
Line 48V 377
Line 48V mini 361
Lineal 13W R7S 711
Lineal 9W R7S 711
Lineal tubular 11W R7S dimmable 711
Lineal tubular 5W R7S 710
Lineal tubular 9W R7S 710
Lineal tubular 9W R7S dimm. 710
Linear joint 3PH spacing recessed 319
Linear joint 3PH spacing surface 317
Linear joint 3PH without spacing 317
Linear joint 48V recessed 367
Linear joint 48V surface 367
Linear joint IP 397
Linear joint IP68 537
Linear joint mini 349
Lira Ufo 100W / 150W / 200W 666
Lira Ufo 240W 667
Lonja 3PH 335
Luk r recessed 453
Luk r recessed IP 453
Luk sq recessed IP 453
Luky 537
Lynk G53 683
Lynk GU10 683
Lynk GU10 dimmable 683
Mac base 555
Mac floor 645
Mac floor XL 645
Mac wall 555
Mac wall base 557
Mac wall XL 555
Mac XL base 555
Madi 603
Magnet track 48V recessed 367
Magnet track 48V surface 367
Magnet track mini recessed 349
Magnet track mini surface 349
Max BA15d 708
Micro globo 6W E27 692
Micro Zoom recessed 413
Micro Zoom XL recessed 413
Mini Bora 48V 373
Mini Bora recessed 427
Mini Bora surface 463
Mini Comet 579
Mini Concord 48V mini 359
Mini Concord surface 469
Mini Golf surface 460
Mini Hat 48V suspension 383
Mini Hat suspension recessed 521
Mini Hat suspension surface 521
Mini Icon wall 563
Mini Kora r surface 485
Mini Kora sq surface 487
Mini Line 48V 377
Mini Line 48V mini 361
Mini mac base 555
Mini Mac wall 555
Mini Oxo recessed 421
Mini Oxo rect 2 recessed 423
Mini Oxo rect 4 recessed 423
Mini Oxo rect 6 recessed 423
Mini Oxo sq recessed 421
Mini Picolo 48V mini 351
Mini Pla 589
Mini Rubyc surface 471
Mini Sigma 613
Mini Thessis dimm recessed 443
Mini Thessis recessed 441
Mini Tram 3PH 331
Mini Tram 48V 375
Mini Tram recessed 429
Minimus 103
Mirrow 89
Mis r wall 541
Mis sq wall 541
Motion sensor 307
Nano Alp space 499
Nano Argo flat recessed 409
Nano Golf surface 460
Nano Line 48V 377
Nano Oxo recessed 419
Nano Oxo sq recessed 419
Nano Pulsar r / sq recessed 415
Nano Pulsar r / sq surface 415
Nano Pulsar r / sq trim 415
Nano Sigma 613
Nano Tram 48V 375
Nano Tram recessed 429
Narrow GU10 dimmable 679
Neo 567
Neo sensor 569
Neo XL 567
Neo XL sensor 569
Nexus 77
Nik 619
Nitro GU10 685
Nix 539
Noa 80W E27 / E40 704
Noa 85W E27 / E40 704
Noi dimm recessed 439
Noi recessed 439
Nox surface 489
Nyneto 101
Obo 19W E27 700
Obo 27W E27 700
Obo 36W E27 / E40 701
Obo 45W E27 / E40 701
Oma 571
One GU10 wall 591
One GU10 wall dual 591
One recessed 451
One surface 491
Optic 611
Optional spike 175mm 630
Outdoor track IP 397
Oxo dimm recessed 425
Oxo sq dimm recessed 425
Par 30 E27 697
Par 38 3.000K E27 697
Par 38 Green E27 697
Picolo 3PH 321
Picolo 48V mini 351
Picolo AR111 3PH 323
Picolo AR111 surface 481
Picolo base 479
Picolo GU10 3PH 323
Picolo GU10 surface 481
Pl T40 E27 696
Pla 589
Pla XL 589
Plus surface 467
Polaris 100W 637
Polaris 150W 637
Polaris 200W 637
Polo 537
Popa 653
Popa XL 653
Port 535
Power GU10 682
Power GU10 dimmable 682

# Alphabetical Index (Name - Page)


| | |
|---|---|
| Power MR16 | 682 |
| Power supplies 24V | 308 |
| Power supplies 48V | 366 |
| Power supplies push / RF | 295 |
| Power supplies push / RF / Tuya | 295 |
| Power supply 3PH recessed | 319 |
| Power supply 3PH surface | 317 |
| Prisma E14 | 686 |
| Proa | 655 |
| Pucom r trim | 435 |
| Pulcom led accessory | 435 |
| Pulcom r asymm trim | 435 |
| Pulcom r recessed | 433 |
| Pulcom r recessed asymm | 433 |
| Pulcom r surface | 435 |
| Pulcom sq recessed | 433 |
| Pulcom sq recessed asymm | 433 |
| Pulsar dimm recessed | 417 |
| Pulsar surface accessory | 417 |
| Pulsar trim | 417 |
| Pun | 543 |
| Pure wall | 549 |
| PVC trim 48V | 367 |
| Quick | 69 |
| R-39 E14 | 694 |
| R-50 E14 | 694 |
| R-63 E27 | 694 |
| R-63 s-line GU10 | 681 |
| R-80 E27 | 695 |
| R-90 2.200K E27 | 695 |
| R-90 3.000K E27 | 695 |
| Recessed base 3PH | 319 |
| RF Control for Tuya | 294 |
| Rok recessed | 455 |
| Rubyc surface | 471 |
| Sair | 623 |
| Sair XL | 623 |
| Selen | 581 |
| Shop E14 | 686 |
| Side base space | 507 |
| Sigma | 613 |
| Sigma XL | 613 |
| Signal | 621 |
| Sil E27 | 698 |
| Skin | 533 |
| Sky 100W | 635 |
| Sky 10W | 634 |
| Sky 10W sensor | 633 |
| Sky 10W spike | 629 |
| Sky 10W switch | 630 |
| Sky 150W | 635 |
| Sky 200W | 635 |
| Sky 20W | 634 |
| Sky 20W switch | 630 |
| Sky 30W | 634 |
| Sky 30W sensor | 633 |
| Sky 30W switch | 631 |
| Sky 40W switch | 631 |
| Sky 50W sensor | 633 |
| Sky solar sensor | 663 |
| Smile 20W E27 | 702 |
| Smile 40W E27 | 702 |
| Smile 60W E40 | 702 |
| Sono 3PH | 343 |
| Sono XL 3PH | 343 |
| Sphere 48V | 385 |
| Sphere 48V mini | 357 |
| Sphere 48V mini suspension | 357 |
| Sphere 48V suspension | 385 |
| Sphere alp wall | 575 |
| Sphere wall | 575 |
| Square | 107 |
| Standard 10W E27 dimmable | 691 |
| Standard 12W E27 | 690 |
| Standard 12W E27 dimmable | 691 |
| Standard 15W E27 | 690 |
| Standard 17W E27 dimmable | 691 |
| Standard 6W E27 | 689 |
| Standard 9W E27 | 689 |
| Start connector 48V | 367 |
| Start connector mini | 349 |
| Stem | 607 |
| Steps | 535 |
| Sunset r | 585 |
| Sunset sq | 585 |
| Sunset XL | 587 |
| Sunset XL dual | 587 |
| Surface base 3PH | 317 |
| Suspension kit 3PH | 317 |
| Suspension kit 48V | 367 |
| Suspension kit mini | 349 |
| Sweet usb-a | 551 |
| Sweet wall | 551 |
| System GU10 | 680 |
| System GU10 dimmable | 680 |
| System MR16 | 680 |
| T joint 3PH recessed | 319 |
| T joint 3PH surface | 317 |
| T joint ceiling mini recessed | 349 |
| T joint ceiling mini surface | 349 |
| T joint IP68 | 537 |
| Tao recessed | 437 |
| Tax | 91 |
| Thessis dimm recessed | 443 |
| Thessis recessed | 441 |
| Thessis XL recessed | 441 |
| Three phase track recessed | 319 |
| Three phase track surface | 317 |
| Time | 75 |
| Time E | 75 |
| Time track | 85 |
| Time wall sensor | 83 |
| Tot suspension / surface | 527 |
| Tot XL suspension / surface | 527 |
| Tram 3PH | 331 |
| Tram 48V mini | 361 |
| Tram recessed | 429 |
| Tram XL recessed | 429 |
| Triton | 141 |
| Triton down | 143 |
| Tron | 573 |
| Tubi | 95 |
| Tubi wall | 97 |
| Tundra | 121 |
| Tura | 647 |
| Tura XL | 647 |
| Tutto GU10 | 676 |
| Tutto MR11 | 676 |
| Tuya Gateway | 292 |
| Tween recessed | 547 |
| Tween surface | 547 |
| Twist | 649 |
| Ufo 300W | 673 |
| Ufo Lens Dali 100W | 668 |
| Ufo Lens Dali 150W | 668 |
| Ufo Lens Dali 200W | 669 |
| Ufo Lens Dali 240W | 669 |
| Ufo Lens switch 120W/160W/200W | 667 |
| Ufo Lens switch 140W/190W/240W | 667 |
| Ufo Lens switch 60W/80W/100W | 666 |
| Ufo Lens switch 90W/120W/150W | 666 |
| Uniform-line G4 | 706 |
| Uniform-line G9 | 707 |
| Uniform-line GU10 | 678 |
| Uniform-line GU10 dimmable | 678 |
| Uniform-line long G4 | 706 |
| Uniform-line long G9 | 707 |
| Uniform-line MR16 | 678 |
| Urban | 52 |
| Urban asymmetric | 63 |

| | |
|---|---|
| Urban asymmetric E | 63 |
| Urban E | 55 |
| Urban fly | 59 |
| Urban fly E | 59 |
| Urban market | 67 |
| Urban track | 65 |
| Urban train | 57 |
| Urban train E | 57 |
| Urban wall sensor | 64 |
| Urban emercency | 53 |
| Urban sensor casambi | 53 |
| Urban work | 61 |
| Urban work E | 61 |
| Vision | 73 |
| Visor | 605 |
| Visor solar | 661 |
| Volt r 48V | 387 |
| Volt r base | 473 |
| Volt r GU10 base | 476 |
| Volt r3 GU10 surface | 477 |
| Volt r3 surface | 475 |
| Volt sq 48V | 387 |
| Volt sq base | 473 |
| Volt sq GU10 base | 476 |
| Volt sq3 GU10 surface | 477 |
| Volt sq3 surface | 475 |
| Waterproof silicone cover IP | 397 |
| Wech | 627 |
| Wire space | 507 |
| X joint 3PH recessed | 319 |
| X joint 3PH surface | 317 |
| X joint ceiling mini recessed | 349 |
| X joint ceiling mini surface | 349 |
| X joint IP68 | 537 |
| Zas r | 617 |
| Zas sq | 617 |
| Zero design | 126 |
| Zero direct | 125 |
| Zero direct XL | 123 |
| Zero dual | 131 |
| Zero in | 113 |
| Zero in XL | 109 |
| Zero out | 115 |
| Zero out XL | 111 |
| Zibor | 581 |
| Zio GU10 wall | 593 |
| Zio GU10 wall dual | 593 |
| Zio recessed | 451 |
| Zio surface | 491 |
| Zoe 48V mini | 355 |
| Zoe 48V mini suspension | 355 |
| Zoe 48V suspension | 381 |
| Zoe space | 505 |
| Zoe suspension recessed | 519 |
| Zoe suspension surface | 519 |
| Zoe XL space | 505 |
| Zoom 3PH | 327 |

# Numerical Index (Code - Page)


| | |
|---|---|
| 3364 | 317 |
| 3365 | 317 |
| 3366 | 317 |
| 3367 | 317 |
| 3368 | 317 |
| 3369 | 317 |
| 3370 | 317 |
| 3372 | 317 |
| 3373 | 317 |
| 3438 | 682 |
| 3441 | 682 |
| 3442 | 682 |
| 3443 | 682 |
| 3444 | 676 |
| 3445 | 676 |
| 3446 | 676 |
| 3447 | 676 |
| 3448 | 676 |
| 3449 | 676 |
| 3450 | 686 |
| 3452 | 683 |
| 3453 | 683 |
| 3454 | 683 |
| 3455 | 683 |
| 3456 | 683 |
| 3457 | 683 |
| 3458 | 317 |
| 3459 | 317 |
| 3464 | 683 |
| 3465 | 683 |
| 3466 | 683 |
| 3467 | 685 |
| 3468 | 685 |
| 3469 | 685 |
| 3470 | 685 |
| 3477 | 711 |
| 3478 | 711 |
| 3485 | 439 |
| 3486 | 439 |
| 3489 | 682 |
| 3490 | 682 |
| 3491 | 682 |
| 3496 | 659 |
| 3497 | 659 |
| 3518 | 693 |
| 3519 | 693 |
| 3520 | 693 |
| 3521 | 693 |
| 3522 | 693 |
| 3523 | 693 |
| 3524 | 692 |
| 3525 | 692 |
| 3526 | 692 |
| 3527 | 691 |
| 3528 | 691 |
| 3529 | 691 |
| 3530 | 691 |
| 3531 | 655 |
| 3532 | 655 |
| 3534 | 687 |
| 3569 | 708 |
| 3570 | 712 |
| 3571 | 712 |
| 3579 | 697 |
| 3580 | 615 |
| 3581 | 615 |
| 3582 | 569 |
| 3583 | 569 |
| 3584 | 569 |
| 3585 | 569 |
| 3586 | 643 |
| 3587 | 657 |
| 3590 | 643 |
| 3592 | 657 |
| 3614 | 317 |
| 3615 | 317 |
| 3616 | 317 |
| 3617 | 317 |
| 3618 | 317 |
| 3619 | 317 |
| 3620 | 317 |
| 3621 | 317 |
| 3622 | 317 |
| 3623 | 317 |
| 3625 | 317 |
| 3747 | 567 |
| 3748 | 567 |
| 3749 | 567 |
| 3750 | 567 |
| 3751 | 643 |
| 3752 | 643 |
| 3753 | 643 |
| 3754 | 643 |
| 3795 | 317 |
| 3796 | 317 |
| 3797 | 317 |
| 3805 | 319 |
| 3851 | 319 |
| 3852 | 319 |
| 3854 | 699 |
| 3855 | 699 |
| 3856 | 699 |
| 3857 | 699 |
| 3858 | 699 |
| 3859 | 699 |
| 3860 | 699 |
| 3861 | 699 |
| 3881 | 692 |
| 3882 | 653 |
| 3883 | 653 |
| 3884 | 653 |
| 3885 | 653 |
| 3886 | 569 |
| 3887 | 569 |
| 3888 | 569 |
| 3889 | 569 |
| 3890 | 567 |
| 3891 | 567 |
| 3892 | 567 |
| 3893 | 567 |
| 3897 | 319 |
| 3898 | 319 |
| 3900 | 704 |
| 3901 | 704 |
| 3902 | 704 |
| 3903 | 704 |
| 3904 | 711 |
| 3905 | 711 |
| 3906 | 711 |
| 3909 | 700 |
| 3910 | 700 |
| 3911 | 701 |
| 3912 | 701 |
| 3913 | 702 |
| 3914 | 702 |
| 3915 | 702 |
| 3917 | 700 |
| 3918 | 700 |
| 3919 | 701 |
| 3920 | 701 |
| 3921 | 701 |
| 3922 | 701 |
| 3923 | 701 |
| 3924 | 701 |
| 3925 | 702 |
| 3926 | 702 |
| 3927 | 702 |
| 3929 | 605 |
| 3931 | 605 |
| 3942 | 437 |
| 3943 | 437 |
| 3944 | 437 |
| 3945 | 437 |
| 3948 | 431 |
| 3949 | 431 |
| 3950 | 431 |
| 3951 | 431 |
| 3952 | 431 |
| 3953 | 431 |
| 3955 | 635 |
| 3956 | 635 |
| 3957 | 635 |
| 3965 | 704 |
| 3972 | 673 |
| 3983 | 561 |
| 3984 | 561 |
| 3985 | 561 |
| 3986 | 561 |
| 3987 | 561 |
| 3988 | 561 |
| 3995 | 537 |
| 3996 | 537 |
| 3997 | 537 |
| 3998 | 537 |
| 3999 | 537 |
| 4000 | 537 |
| 4001 | 537 |
| 4002 | 537 |
| 4003 | 681 |
| 4023 | 677 |
| 4024 | 677 |
| 4025 | 677 |
| 4038 | 339 |
| 4039 | 339 |
| 4040 | 339 |
| 4049 | 481 |
| 4050 | 481 |
| 4096 | 447 |
| 4097 | 447 |
| 4098 | 447 |
| 4099 | 447 |
| 4106 | 535 |
| 4107 | 535 |
| 4108 | 533 |
| 4109 | 533 |
| 4110 | 535 |
| 4111 | 535 |
| 4112 | 535 |
| 4113 | 535 |
| 4126 | 533 |

| | |
|---|---|
| 4127 | 533 |
| 4134 | 617 |
| 4135 | 613 |
| 4137 | 695 |
| 4175 | 551 |
| 4176 | 339 |
| 4177 | 339 |
| 4178 | 339 |
| 4193 | 661 |
| 4194 | 661 |
| 4209 | 661 |
| 4227 | 678 |
| 4228 | 678 |
| 4229 | 678 |
| 4236 | 441 |
| 4243 | 688 |
| 4244 | 688 |
| 4245 | 688 |
| 4246 | 688 |
| 4247 | 688 |
| 4248 | 688 |
| 4249 | 688 |
| 4250 | 688 |
| 4251 | 613 |
| 4254 | 634 |
| 4266 | 634 |
| 4276 | 634 |
| 4279 | 634 |
| 4280 | 634 |
| 4290 | 621 |
| 4291 | 619 |
| 4292 | 619 |
| 4295 | 682 |
| 4296 | 682 |
| 4297 | 415 |
| 4298 | 415 |
| 4299 | 415 |
| 4300 | 415 |
| 4301 | 415 |
| 4302 | 415 |
| 4303 | 561 |
| 4304 | 561 |
| 4308 | 633 |
| 4309 | 633 |
| 4310 | 633 |
| 4311 | 633 |
| 4312 | 561 |
| 4331 | 611 |
| 4337 | 333 |
| 4339 | 333 |
| 4340 | 629 |
| 4341 | 629 |
| 4349 | 633 |
| 4350 | 633 |
| 4351 | 633 |
| 4352 | 633 |
| 4353 | 633 |
| 4354 | 633 |
| 4355 | 633 |
| 4356 | 633 |
| 4362 | 317 |
| 4363 | 317 |
| 4364 | 317 |
| 4365 | 317 |
| 4367 | 539 |
| 4368 | 539 |
| 4369 | 539 |
| 4383 | 563 |
| 4384 | 563 |
| 4385 | 563 |
| 4386 | 563 |
| 4387 | 563 |
| 4388 | 563 |
| 4401 | 634 |
| 4402 | 634 |
| 4410 | 415 |
| 4411 | 415 |
| 4412 | 415 |
| 4413 | 415 |
| 4427 | 331 |
| 4428 | 331 |
| 4429 | 331 |
| 4430 | 331 |
| 4433 | 481 |
| 4435 | 323 |
| 4437 | 321 |
| 4438 | 321 |
| 4439 | 329 |
| 4440 | 329 |
| 4444 | 333 |
| 4445 | 333 |
| 4447 | 333 |
| 4448 | 333 |
| 4451 | 415 |
| 4452 | 415 |
| 4453 | 415 |
| 4454 | 415 |
| 4455 | 415 |
| 4456 | 415 |
| 4461 | 515 |
| 4462 | 515 |
| 4463 | 515 |
| 4464 | 515 |
| 4465 | 517 |
| 4466 | 517 |
| 4467 | 517 |
| 4468 | 517 |
| 4476 | 451 |
| 4477 | 451 |
| 4478 | 451 |
| 4479 | 451 |
| 4480 | 491 |
| 4481 | 491 |
| 4482 | 491 |
| 4483 | 491 |
| 4484 | 457 |
| 4485 | 457 |
| 4486 | 457 |
| 4487 | 457 |
| 4509 | 639 |
| 4510 | 639 |
| 4511 | 639 |
| 4512 | 639 |
| 4513 | 637 |
| 4514 | 637 |
| 4515 | 637 |
| 4516 | 637 |
| 4517 | 637 |
| 4518 | 637 |
| 4519 | 637 |
| 4520 | 637 |
| 4521 | 637 |
| 4522 | 467 |
| 4523 | 467 |
| 4541 | 331 |
| 4542 | 331 |
| 4543 | 331 |
| 4544 | 331 |
| 4549 | 419 |
| 4550 | 419 |
| 4551 | 419 |
| 4552 | 419 |
| 4566 | 666 |
| 4567 | 667 |
| 4573 | 373 |
| 4574 | 373 |
| 4575 | 373 |
| 4576 | 373 |
| 4577 | 373 |
| 4578 | 373 |
| 4579 | 373 |
| 4580 | 373 |
| 4581 | 373 |
| 4582 | 373 |
| 4583 | 373 |
| 4584 | 373 |
| 4585 | 373 |
| 4586 | 373 |
| 4587 | 373 |
| 4588 | 373 |
| 4589 | 427 |
| 4590 | 427 |
| 4591 | 427 |
| 4592 | 427 |
| 4593 | 427 |
| 4594 | 427 |
| 4595 | 427 |
| 4596 | 427 |
| 4597 | 427 |
| 4598 | 427 |
| 4599 | 427 |
| 4600 | 427 |
| 4601 | 427 |
| 4602 | 427 |
| 4603 | 427 |
| 4604 | 427 |
| 4605 | 523 |
| 4606 | 523 |
| 4607 | 523 |
| 4608 | 523 |
| 4609 | 523 |
| 4610 | 523 |
| 4611 | 523 |
| 4612 | 523 |
| 4613 | 523 |
| 4614 | 523 |
| 4615 | 523 |
| 4616 | 523 |
| 4617 | 523 |
| 4618 | 523 |
| 4619 | 523 |
| 4620 | 523 |
| 4621 | 463 |
| 4622 | 463 |
| 4623 | 463 |
| 4624 | 463 |
| 4625 | 463 |
| 4626 | 463 |
| 4627 | 463 |
| 4628 | 463 |

# Numerical Index (Code - Page)


| | |
|---|---|
| 4629 | 463 |
| 4630 | 463 |
| 4631 | 463 |
| 4632 | 463 |
| 4633 | 463 |
| 4634 | 463 |
| 4635 | 463 |
| 4636 | 463 |
| 4637 | 367 |
| 4638 | 367 |
| 4639 | 367 |
| 4640 | 367 |
| 4641 | 367 |
| 4642 | 367 |
| 4643 | 367 |
| 4644 | 367 |
| 4645 | 367 |
| 4646 | 367 |
| 4647 | 367 |
| 4648 | 367 |
| 4649 | 367 |
| 4650 | 367 |
| 4651 | 367 |
| 4652 | 367 |
| 4653 | 367 |
| 4654 | 367 |
| 4655 | 367 |
| 4657 | 367 |
| 4658 | 367 |
| 4659 | 367 |
| 4660 | 367 |
| 4661 | 367 |
| 4662 | 367 |
| 4663 | 367 |
| 4664 | 367 |
| 4665 | 367 |
| 4666 | 367 |
| 4667 | 581 |
| 4668 | 581 |
| 4669 | 581 |
| 4670 | 581 |
| 4671 | 679 |
| 4672 | 679 |
| 4677 | 693 |
| 4678 | 693 |
| 4679 | 630 |
| 4680 | 630 |
| 4681 | 630 |
| 4682 | 630 |
| 4683 | 630 |
| 4684 | 630 |
| 4685 | 631 |
| 4686 | 631 |
| 4687 | 631 |
| 4688 | 631 |
| 4689 | 631 |
| 4690 | 617 |
| 4691 | 443 |
| 4692 | 617 |
| 4693 | 617 |
| 4694 | 631 |
| 4700 | 317 |
| 4701 | 317 |
| 4707 | 366 |
| 4708 | 366 |
| 4709 | 643 |
| 4710 | 643 |
| 4711 | 366 |
| 4731 | 429 |
| 4732 | 429 |
| 4735 | 429 |
| 4736 | 429 |
| 4737 | 429 |
| 4738 | 429 |
| 4742 | 433 |
| 4743 | 433 |
| 4744 | 433 |
| 4745 | 433 |
| 4746 | 433 |
| 4747 | 433 |
| 4748 | 433 |
| 4749 | 433 |
| 4750 | 513 |
| 4751 | 513 |
| 4752 | 513 |
| 4753 | 319 |
| 4754 | 319 |
| 4755 | 455 |
| 4756 | 455 |
| 4757 | 455 |
| 4758 | 453 |
| 4759 | 453 |
| 4761 | 435 |
| 4762 | 435 |
| 4763 | 435 |
| 4764 | 435 |
| 4766 | 441 |
| 4767 | 443 |
| 4768 | 389 |
| 4769 | 389 |
| 4770 | 389 |
| 4771 | 389 |
| 4772 | 391 |
| 4773 | 391 |
| 4774 | 391 |
| 4775 | 391 |
| 4776 | 375 |
| 4777 | 375 |
| 4778 | 375 |
| 4779 | 375 |
| 4780 | 375 |
| 4781 | 375 |
| 4782 | 375 |
| 4783 | 375 |
| 4784 | 377 |
| 4785 | 377 |
| 4786 | 377 |
| 4787 | 371 |
| 4788 | 371 |
| 4789 | 371 |
| 4790 | 371 |
| 4791 | 371 |
| 4792 | 371 |
| 4793 | 371 |
| 4794 | 371 |
| 4795 | 381 |
| 4796 | 381 |
| 4797 | 381 |
| 4798 | 381 |
| 4799 | 519 |
| 4800 | 519 |
| 4801 | 519 |
| 4802 | 519 |
| 4803 | 519 |
| 4804 | 519 |
| 4805 | 519 |
| 4806 | 519 |
| 4807 | 367 |
| 4808 | 511 |
| 4809 | 511 |
| 4810 | 511 |
| 4811 | 511 |
| 4812 | 511 |
| 4813 | 511 |
| 4814 | 511 |
| 4815 | 511 |
| 4816 | 511 |
| 4817 | 511 |
| 4818 | 511 |
| 4819 | 511 |
| 4820 | 625 |
| 4821 | 435 |
| 4822 | 435 |
| 4823 | 435 |
| 4824 | 435 |
| 4825 | 435 |
| 4826 | 435 |
| 4827 | 581 |
| 4828 | 581 |
| 4829 | 581 |
| 4830 | 581 |
| 4831 | 487 |
| 4832 | 485 |
| 4833 | 479 |
| 4834 | 479 |
| 4837 | 645 |
| 4838 | 645 |
| 4839 | 645 |
| 4840 | 645 |
| 4841 | 645 |
| 4842 | 645 |
| 4843 | 645 |
| 4844 | 645 |
| 4845 | 645 |
| 4846 | 645 |
| 4847 | 645 |
| 4848 | 645 |
| 4849 | 647 |
| 4850 | 647 |
| 4851 | 647 |
| 4852 | 647 |
| 4853 | 647 |
| 4854 | 647 |
| 4855 | 647 |
| 4856 | 647 |
| 4857 | 647 |
| 4858 | 647 |
| 4859 | 647 |
| 4860 | 647 |
| 4876 | 565 |
| 4877 | 565 |
| 4878 | 565 |
| 4879 | 565 |
| 4880 | 565 |
| 4881 | 565 |
| 4882 | 641 |
| 4883 | 641 |
| 4884 | 641 |
| 4885 | 641 |
| 4886 | 641 |

| | |
|---|---|
| 4887 | 641 |
| 4888 | 641 |
| 4889 | 641 |
| 4890 | 641 |
| 4891 | 641 |
| 4892 | 641 |
| 4893 | 641 |
| 4894 | 623 |
| 4895 | 623 |
| 4896 | 623 |
| 4897 | 623 |
| 4898 | 623 |
| 4899 | 623 |
| 4900 | 327 |
| 4901 | 327 |
| 4902 | 527 |
| 4903 | 527 |
| 4904 | 527 |
| 4905 | 527 |
| 4906 | 561 |
| 4907 | 561 |
| 4908 | 561 |
| 4909 | 561 |
| 4910 | 561 |
| 4911 | 561 |
| 4912 | 561 |
| 4913 | 561 |
| 4914 | 561 |
| 4915 | 668 |
| 4916 | 668 |
| 4917 | 668 |
| 4918 | 668 |
| 4919 | 669 |
| 4920 | 669 |
| 4921 | 669 |
| 4922 | 617 |
| 4923 | 615 |
| 4924 | 615 |
| 4930 | 513 |
| 4931 | 513 |
| 4932 | 513 |
| 4933 | 491 |
| 4934 | 491 |
| 4935 | 435 |
| 4946 | 343 |
| 4947 | 343 |
| 4950 | 343 |
| 4951 | 343 |
| 4952 | 515 |
| 4953 | 515 |
| 4954 | 517 |
| 4955 | 517 |
| 4956 | 292 |
| 4957 | 583 |
| 4958 | 583 |
| 4959 | 583 |
| 4960 | 583 |
| 4961 | 583 |
| 4962 | 583 |
| 4963 | 319 |
| 4964 | 319 |
| 4965 | 319 |
| 4966 | 319 |
| 4967 | 319 |
| 4968 | 319 |
| 4969 | 319 |
| 4970 | 319 |
| 4971 | 319 |
| 4972 | 319 |
| 4973 | 319 |
| 4974 | 319 |
| 4975 | 319 |
| 4976 | 319 |
| 4977 | 319 |
| 4978 | 319 |
| 4979 | 607 |
| 4981 | 607 |
| 4982 | 583 |
| 4983 | 583 |
| 4984 | 583 |
| 4987 | 441 |
| 4988 | 441 |
| 4989 | 585 |
| 4990 | 585 |
| 4991 | 585 |
| 4992 | 585 |
| 4993 | 585 |
| 4994 | 585 |
| 4995 | 555 |
| 4996 | 555 |
| 4997 | 555 |
| 4998 | 555 |
| 4999 | 555 |
| 5000 | 555 |
| 5001 | 555 |
| 5002 | 555 |
| 5003 | 555 |
| 5004 | 627 |
| 5005 | 627 |
| 5006 | 591 |
| 5007 | 591 |
| 5008 | 591 |
| 5009 | 591 |
| 5010 | 591 |
| 5011 | 591 |
| 5012 | 593 |
| 5013 | 593 |
| 5014 | 593 |
| 5015 | 593 |
| 5016 | 593 |
| 5017 | 593 |
| 5018 | 445 |
| 5019 | 439 |
| 5020 | 541 |
| 5021 | 541 |
| 5022 | 541 |
| 5023 | 541 |
| 5024 | 541 |
| 5025 | 541 |
| 5027 | 531 |
| 5028 | 545 |
| 5029 | 543 |
| 5030 | 441 |
| 5034 | 435 |
| 5035 | 435 |
| 5036 | 435 |
| 5037 | 387 |
| 5038 | 387 |
| 5039 | 387 |
| 5040 | 387 |
| 5041 | 473 |
| 5042 | 473 |
| 5043 | 473 |
| 5044 | 473 |
| 5045 | 475 |
| 5046 | 475 |
| 5047 | 475 |
| 5048 | 475 |
| 5049 | 476 |
| 5050 | 476 |
| 5051 | 476 |
| 5052 | 476 |
| 5053 | 477 |
| 5054 | 477 |
| 5055 | 477 |
| 5056 | 477 |
| 5057 | 417 |
| 5058 | 417 |
| 5059 | 417 |
| 5060 | 417 |
| 5061 | 421 |
| 5062 | 421 |
| 5063 | 423 |
| 5064 | 423 |
| 5065 | 423 |
| 5066 | 423 |
| 5067 | 423 |
| 5068 | 423 |
| 5069 | 471 |
| 5070 | 471 |
| 5071 | 469 |
| 5072 | 469 |
| 5073 | 579 |
| 5074 | 579 |
| 5075 | 579 |
| 5076 | 579 |
| 5084 | 501 |
| 5085 | 501 |
| 5086 | 501 |
| 5087 | 501 |
| 5088 | 503 |
| 5089 | 503 |
| 5090 | 503 |
| 5091 | 503 |
| 5092 | 505 |
| 5093 | 505 |
| 5094 | 505 |
| 5095 | 505 |
| 5096 | 499 |
| 5097 | 499 |
| 5098 | 499 |
| 5099 | 499 |
| 5106 | 507 |
| 5107 | 507 |
| 5108 | 421 |
| 5109 | 421 |
| 5110 | 417 |
| 5111 | 417 |
| 5112 | 579 |
| 5113 | 579 |
| 5114 | 499 |
| 5115 | 499 |
| 5116 | 499 |
| 5117 | 499 |
| 5118 | 501 |
| 5119 | 501 |
| 5120 | 501 |
| 5121 | 501 |
| 5122 | 501 |
| 5123 | 501 |

# Numerical Index (Code - Page)


| | |
|---|---|
| 5124 | 501 |
| 5125 | 501 |
| 5128 | 507 |
| 5129 | 507 |
| 5139 | 366 |
| 5140 | 366 |
| 5147 | 666 |
| 5148 | 666 |
| 5149 | 667 |
| 5150 | 667 |
| 5154 | 603 |
| 5155 | 551 |
| 5156 | 551 |
| 5157 | 553 |
| 5158 | 553 |
| 5159 | 549 |
| 5160 | 549 |
| 5178 | 651 |
| 5179 | 325 |
| 5180 | 325 |
| 5181 | 391 |
| 5182 | 391 |
| 5183 | 525 |
| 5184 | 525 |
| 5185 | 391 |
| 5186 | 391 |
| 5187 | 684 |
| 5188 | 684 |
| 5189 | 684 |
| 5190 | 684 |
| 5191 | 684 |
| 5192 | 684 |
| 5196 | 547 |
| 5197 | 547 |
| 5198 | 547 |
| 5199 | 547 |
| 5200 | 547 |
| 5201 | 547 |
| 5202 | 377 |
| 5203 | 377 |
| 5204 | 377 |
| 5205 | 545 |
| 5206 | 417 |
| 5207 | 417 |
| 5208 | 415 |
| 5209 | 415 |
| 5210 | 415 |
| 5211 | 415 |
| 5212 | 417 |
| 5213 | 417 |
| 5214 | 453 |
| 5215 | 453 |
| 5216 | 453 |
| 5217 | 453 |
| 5218 | 555 |
| 5219 | 555 |
| 5220 | 555 |
| 5221 | 337 |
| 5222 | 337 |
| 5224 | 483 |
| 5225 | 483 |
| 5226 | 555 |
| 5227 | 555 |
| 5228 | 555 |
| 5229 | 555 |
| 5230 | 555 |
| 5231 | 555 |
| 5232 | 555 |
| 5233 | 555 |
| 5234 | 555 |
| 5235 | 555 |
| 5236 | 555 |
| 5237 | 555 |
| 5238 | 379 |
| 5239 | 379 |
| 5246 | 409 |
| 5247 | 409 |
| 5248 | 409 |
| 5249 | 409 |
| 5250 | 409 |
| 5251 | 409 |
| 5252 | 409 |
| 5253 | 409 |
| 5254 | 409 |
| 5255 | 409 |
| 5256 | 409 |
| 5257 | 409 |
| 5258 | 409 |
| 5259 | 409 |
| 5260 | 409 |
| 5261 | 409 |
| 5262 | 409 |
| 5263 | 409 |
| 5264 | 557 |
| 5265 | 557 |
| 5266 | 557 |
| 5267 | 411 |
| 5268 | 411 |
| 5269 | 411 |
| 5270 | 411 |
| 5271 | 411 |
| 5272 | 411 |
| 5274 | 413 |
| 5275 | 413 |
| 5276 | 413 |
| 5277 | 413 |
| 5278 | 413 |
| 5279 | 413 |
| 5280 | 413 |
| 5281 | 413 |
| 5282 | 413 |
| 5283 | 413 |
| 5284 | 413 |
| 5285 | 460 |
| 5286 | 460 |
| 5287 | 460 |
| 5288 | 460 |
| 5289 | 460 |
| 5290 | 460 |
| 5291 | 460 |
| 5292 | 460 |
| 5293 | 460 |
| 5294 | 460 |
| 5295 | 460 |
| 5296 | 460 |
| 5297 | 461 |
| 5298 | 461 |
| 5299 | 461 |
| 5300 | 461 |
| 5301 | 461 |
| 5302 | 461 |
| 5303 | 461 |
| 5304 | 461 |
| 5305 | 461 |
| 5306 | 461 |
| 5307 | 461 |
| 5308 | 461 |
| 5309 | 375 |
| 5310 | 375 |
| 5311 | 375 |
| 5312 | 375 |
| 5313 | 377 |
| 5314 | 377 |
| 5315 | 377 |
| 5316 | 377 |
| 5317 | 367 |
| 5319 | 367 |
| 5325 | 599 |
| 5326 | 599 |
| 5327 | 599 |
| 5328 | 599 |
| 5329 | 597 |
| 5330 | 597 |
| 5331 | 597 |
| 5332 | 597 |
| 5333 | 575 |
| 5334 | 575 |
| 5336 | 575 |
| 5337 | 575 |
| 5339 | 575 |
| 5340 | 575 |
| 5342 | 575 |
| 5343 | 575 |
| 5345 | 521 |
| 5346 | 521 |
| 5348 | 521 |
| 5349 | 521 |
| 5351 | 521 |
| 5352 | 521 |
| 5354 | 521 |
| 5355 | 521 |
| 5357 | 465 |
| 5358 | 465 |
| 5360 | 465 |
| 5361 | 465 |
| 5363 | 383 |
| 5364 | 383 |
| 5366 | 383 |
| 5367 | 383 |
| 5369 | 385 |
| 5370 | 385 |
| 5372 | 385 |
| 5373 | 385 |
| 5373 | 413 |
| 5375 | 385 |
| 5376 | 385 |
| 5378 | 385 |
| 5379 | 385 |
| 5381 | 571 |
| 5382 | 571 |
| 5383 | 571 |
| 5384 | 405 |
| 5385 | 405 |
| 5386 | 405 |
| 5387 | 405 |
| 5388 | 405 |
| 5389 | 405 |
| 5390 | 405 |
| 5391 | 405 |
| 5392 | 401 |

| | |
|---|---|
| 5393 | 401 |
| 5394 | 401 |
| 5395 | 401 |
| 5396 | 403 |
| 5397 | 403 |
| 5398 | 403 |
| 5399 | 403 |
| 5400 | 399 |
| 5401 | 399 |
| 5402 | 399 |
| 5403 | 399 |
| 5404 | 399 |
| 5405 | 399 |
| 5406 | 397 |
| 5407 | 397 |
| 5408 | 397 |
| 5409 | 397 |
| 5410 | 397 |
| 5411 | 397 |
| 5412 | 397 |
| 5413 | 397 |
| 5414 | 397 |
| 5415 | 397 |
| 5416 | 397 |
| 5417 | 397 |
| 5418 | 397 |
| 5419 | 587 |
| 5420 | 587 |
| 5421 | 587 |
| 5422 | 587 |
| 5423 | 587 |
| 5424 | 587 |
| 5425 | 397 |
| 5426 | 397 |
| 5431 | 393 |
| 5432 | 393 |
| 5441 | 393 |
| 5442 | 393 |
| 5558 | 366 |
| 5559 | 366 |
| 5572 | 663 |
| 5573 | 663 |
| 5574 | 443 |
| 5575 | 443 |
| 5576 | 613 |
| 5577 | 613 |
| 5578 | 349 |
| 5579 | 349 |
| 5580 | 349 |
| 5581 | 349 |
| 5582 | 349 |
| 5583 | 349 |
| 5584 | 349 |
| 5585 | 349 |
| 5586 | 349 |
| 5587 | 349 |
| 5588 | 349 |
| 5589 | 349 |
| 5590 | 349 |
| 5591 | 349 |
| 5592 | 349 |
| 5593 | 349 |
| 5594 | 349 |
| 5595 | 349 |
| 5596 | 349 |
| 5597 | 349 |
| 5598 | 349 |
| 5599 | 349 |
| 5600 | 349 |
| 5601 | 349 |
| 5602 | 349 |
| 5603 | 349 |
| 5604 | 349 |
| 5605 | 349 |
| 5606 | 349 |
| 5607 | 349 |
| 5608 | 349 |
| 5609 | 349 |
| 5610 | 349 |
| 5611 | 349 |
| 5612 | 349 |
| 5613 | 349 |
| 5614 | 349 |
| 5615 | 349 |
| 5616 | 361 |
| 5617 | 361 |
| 5618 | 361 |
| 5619 | 361 |
| 5620 | 361 |
| 5621 | 361 |
| 5622 | 361 |
| 5623 | 361 |
| 5624 | 361 |
| 5625 | 361 |
| 5626 | 361 |
| 5627 | 361 |
| 5628 | 351 |
| 5629 | 351 |
| 5630 | 351 |
| 5631 | 351 |
| 5632 | 351 |
| 5633 | 351 |
| 5634 | 351 |
| 5635 | 351 |
| 5636 | 353 |
| 5637 | 353 |
| 5638 | 353 |
| 5639 | 353 |
| 5640 | 355 |
| 5641 | 355 |
| 5642 | 355 |
| 5643 | 355 |
| 5644 | 355 |
| 5645 | 355 |
| 5646 | 355 |
| 5647 | 355 |
| 5648 | 359 |
| 5649 | 359 |
| 5650 | 359 |
| 5651 | 359 |
| 5652 | 359 |
| 5653 | 359 |
| 5654 | 359 |
| 5655 | 359 |
| 5656 | 357 |
| 5657 | 357 |
| 5658 | 357 |
| 5659 | 357 |
| 5660 | 357 |
| 5661 | 357 |
| 5662 | 357 |
| 5663 | 357 |
| 5666 | 559 |
| 5667 | 559 |
| 5668 | 559 |
| 5671 | 537 |
| 5672 | 537 |
| 5673 | 537 |
| 5674 | 623 |
| 5675 | 623 |
| 5676 | 623 |
| 5677 | 623 |
| 5678 | 615 |
| 5679 | 615 |
| 5680 | 615 |
| 5681 | 615 |
| 5682 | 617 |
| 5683 | 617 |
| 5684 | 589 |
| 5685 | 589 |
| 5686 | 589 |
| 5687 | 589 |
| 5688 | 589 |
| 5689 | 589 |
| 5690 | 589 |
| 5691 | 589 |
| 5692 | 589 |
| 5693 | 617 |
| 5694 | 617 |
| 5701 | 649 |
| 5706 | 521 |
| 5707 | 521 |
| 5708 | 521 |
| 5709 | 521 |
| 5710 | 521 |
| 5711 | 521 |
| 5712 | 521 |
| 5713 | 521 |
| 5714 | 383 |
| 5715 | 383 |
| 5716 | 383 |
| 5717 | 383 |
| 6023 | 366 |
| 6025 | 366 |
| 6721 | 369 |
| 6722 | 369 |
| 10119 | 186 |
| 10121 | 186 |
| 10122 | 186 |
| 11119 | 184 |
| 12119 | 184 |
| 13113 | 185 |
| 14119 | 180 |
| 14121 | 180 |
| 14122 | 180 |
| 15119 | 171 |
| 15121 | 171 |
| 15122 | 171 |
| 16119 | 171 |
| 16121 | 171 |
| 16122 | 171 |
| 17119 | 172 |
| 17121 | 172 |
| 17122 | 172 |
| 18119 | 172 |
| 18121 | 172 |
| 18122 | 172 |
| 19119 | 186 |
| 19121 | 186 |
| 19122 | 186 |

# Numerical Index (Code - Page)


| | |
|---|---|
| 20049 | 311 |
| 20066 | 311 |
| 20120 | 310 |
| 20125 | 310 |
| 20130 | 310 |
| 20135 | 311 |
| 20140 | 311 |
| 20145 | 311 |
| 20150 | 311 |
| 20220 | 310 |
| 20225 | 310 |
| 20230 | 310 |
| 20235 | 311 |
| 20240 | 311 |
| 20245 | 311 |
| 20249 | 311 |
| 20250 | 311 |
| 20266 | 311 |
| 20625 | 310 |
| 20635 | 310 |
| 20915 | 311 |
| 20917 | 311 |
| 20925 | 311 |
| 20927 | 311 |
| 20991 | 310 |
| 20999 | 310 |
| 21119 | 198 |
| 21121 | 198 |
| 22119 | 194 |
| 22122 | 194 |
| 22410 | 308 |
| 22415 | 308 |
| 22420 | 308 |
| 22424 | 308 |
| 22430 | 308 |
| 22432 | 308 |
| 22435 | 308 |
| 22460 | 308 |
| 22490 | 304 |
| 22499 | 304 |
| 22570 | 295 |
| 22726 | 302 |
| 22799 | 302 |
| 22821 | 295 |
| 22856 | 295 |
| 22911 | 305 |
| 22948 | 303 |
| 22974 | 305 |
| 23119 | 173 |
| 23121 | 173 |
| 23122 | 173 |
| 24108 | 309 |
| 24109 | 309 |
| 24119 | 189 |
| 24121 | 189 |
| 24122 | 189 |
| 24159 | 309 |
| 24208 | 309 |
| 24308 | 309 |
| 24309 | 309 |
| 24609 | 309 |
| 24758 | 309 |
| 25247 | 279 |
| 25277 | 279 |
| 25307 | 279 |
| 25367 | 279 |
| 25407 | 279 |
| 25467 | 279 |
| 27119 | 199 |
| 27121 | 199 |
| 27122 | 199 |
| 28119 | 205 |
| 29119 | 207 |
| 29187 | 303 |
| 29735 | 303 |
| 29777 | 303 |
| 30129 | 209 |
| 30209 | 209 |
| 30270 | 235 |
| 30300 | 235 |
| 30400 | 235 |
| 31220 | 223 |
| 31227 | 223 |
| 31270 | 223 |
| 31277 | 223 |
| 31300 | 223 |
| 31307 | 223 |
| 31400 | 223 |
| 31407 | 223 |
| 31709 | 310 |
| 31809 | 310 |
| 31909 | 310 |
| 32121 | 193 |
| 32299 | 310 |
| 32499 | 310 |
| 32625 | 310 |
| 32635 | 310 |
| 32699 | 310 |
| 32899 | 310 |
| 32900 | 310 |
| 33119 | 195 |
| 33121 | 195 |
| 33122 | 195 |
| 34277 | 281 |
| 34307 | 281 |
| 34407 | 281 |
| 34720 | 127 |
| 34720 | 163 |
| 34721 | 127 |
| 34721 | 163 |
| 34722 | 127 |
| 34722 | 163 |
| 35119 | 179 |
| 35121 | 179 |
| 35122 | 179 |
| 35311 | 163 |
| 35312 | 163 |
| 35331 | 163 |
| 35332 | 163 |
| 35351 | 163 |
| 35352 | 163 |
| 35361 | 163 |
| 35362 | 163 |
| 35711 | 163 |
| 35712 | 163 |
| 35731 | 163 |
| 35732 | 163 |
| 35751 | 163 |
| 35752 | 163 |
| 35761 | 163 |
| 35762 | 163 |
| 37121 | 187 |
| 37270 | 243 |
| 37300 | 243 |
| 37400 | 243 |
| 38119 | 179 |
| 38121 | 179 |
| 38122 | 179 |
| 38360 | 248 |
| 39122 | 204 |
| 40111 | 335 |
| 40220 | 162 |
| 40339 | 162 |
| 40410 | 162 |
| 40430 | 127 |
| 40430 | 163 |
| 40481 | 162 |
| 40482 | 162 |
| 40483 | 162 |
| 40490 | 127 |
| 40490 | 163 |
| 40491 | 127 |
| 40491 | 163 |
| 40492 | 127 |
| 40492 | 163 |
| 40541 | 162 |
| 40542 | 162 |
| 40543 | 162 |
| 40550 | 162 |
| 40581 | 162 |
| 40582 | 162 |
| 40583 | 162 |
| 40591 | 162 |
| 40592 | 162 |
| 40593 | 162 |
| 40610 | 162 |
| 40631 | 127 |
| 40631 | 163 |
| 40632 | 127 |
| 40632 | 163 |
| 40634 | 127 |
| 40634 | 163 |
| 40635 | 127 |
| 40635 | 163 |
| 40666 | 162 |
| 40669 | 162 |
| 40721 | 162 |
| 40722 | 162 |
| 40723 | 162 |
| 40731 | 162 |
| 40732 | 162 |
| 40733 | 162 |
| 40741 | 162 |
| 40742 | 162 |
| 40743 | 162 |
| 40751 | 162 |
| 40752 | 162 |
| 40753 | 162 |
| 40770 | 162 |
| 40780 | 162 |
| 40790 | 162 |
| 40795 | 162 |
| 40831 | 162 |
| 40832 | 162 |
| 40833 | 162 |
| 40851 | 162 |
| 40852 | 162 |
| 40853 | 162 |
| 40881 | 162 |
| 40882 | 162 |

| | |
|---|---|
| 40883 | 162 |
| 40931 | 162 |
| 40932 | 162 |
| 40933 | 162 |
| 40990 | 162 |
| 40991 | 162 |
| 40992 | 162 |
| 40993 | 162 |
| 40999 | 162 |
| 41270 | 222 |
| 41275 | 222 |
| 41300 | 222 |
| 41305 | 222 |
| 41400 | 222 |
| 41405 | 222 |
| 41600 | 222 |
| 41605 | 222 |
| 42360 | 249 |
| 42365 | 249 |
| 43119 | 176 |
| 43121 | 176 |
| 43122 | 176 |
| 43430 | 254 |
| 44110 | 245 |
| 44270 | 245 |
| 44370 | 245 |
| 44500 | 245 |
| 45220 | 263 |
| 45227 | 263 |
| 45310 | 263 |
| 45317 | 263 |
| 45520 | 263 |
| 45527 | 263 |
| 46460 | 253 |
| 46465 | 253 |
| 47430 | 262 |
| 47437 | 262 |
| 47440 | 262 |
| 47447 | 262 |
| 48220 | 217 |
| 48225 | 217 |
| 48270 | 217 |
| 48275 | 217 |
| 48300 | 217 |
| 48305 | 217 |
| 48400 | 217 |
| 48405 | 217 |
| 49270 | 241 |
| 49300 | 241 |
| 49400 | 241 |
| 49600 | 241 |
| 50460 | 255 |
| 51270 | 237 |
| 51277 | 237 |
| 51300 | 237 |
| 51307 | 237 |
| 51400 | 237 |
| 51407 | 237 |
| 51600 | 237 |
| 51607 | 237 |
| 52270 | 231 |
| 52277 | 231 |
| 52300 | 231 |
| 52307 | 231 |
| 52400 | 231 |
| 52407 | 231 |
| 52600 | 231 |
| 52607 | 231 |
| 53119 | 173 |
| 53121 | 173 |
| 53122 | 173 |
| 54460 | 251 |
| 54467 | 251 |
| 55270 | 242 |
| 55300 | 242 |
| 55400 | 242 |
| 56270 | 234 |
| 56300 | 234 |
| 56360 | 234 |
| 56400 | 234 |
| 57001 | 299 |
| 57241 | 297 |
| 57242 | 297 |
| 57299 | 297 |
| 57400 | 299 |
| 57452 | 299 |
| 57588 | 298 |
| 57661 | 297 |
| 57662 | 299 |
| 57666 | 299 |
| 57881 | 299 |
| 57882 | 299 |
| 57924 | 298 |
| 59112 | 297 |
| 59121 | 297 |
| 59122 | 297 |
| 59141 | 297 |
| 59142 | 297 |
| 59182 | 296 |
| 59189 | 296 |
| 59249 | 298 |
| 59289 | 299 |
| 59519 | 298 |
| 59549 | 298 |
| 59629 | 298 |
| 59682 | 296 |
| 59689 | 296 |
| 59733 | 298 |
| 59739 | 298 |
| 59769 | 298 |
| 59777 | 298 |
| 59789 | 298 |
| 59847 | 297 |
| 60119 | 181 |
| 60121 | 181 |
| 60122 | 181 |
| 60460 | 257 |
| 61270 | 228 |
| 61275 | 228 |
| 61300 | 228 |
| 61305 | 228 |
| 61400 | 228 |
| 61405 | 228 |
| 61600 | 228 |
| 61605 | 228 |
| 62412 | 308 |
| 62415 | 308 |
| 62430 | 308 |
| 62460 | 308 |
| 62475 | 308 |
| 63360 | 247 |
| 63367 | 247 |
| 64153 | 309 |
| 64158 | 309 |
| 64270 | 216 |
| 64300 | 216 |
| 64400 | 216 |
| 64453 | 309 |
| 64458 | 309 |
| 64803 | 309 |
| 64808 | 309 |
| 65119 | 201 |
| 65121 | 201 |
| 65122 | 201 |
| 67122 | 203 |
| 68121 | 193 |
| 68122 | 193 |
| 68270 | 226 |
| 68300 | 226 |
| 68400 | 226 |
| 69119 | 191 |
| 69220 | 221 |
| 69225 | 221 |
| 69270 | 221 |
| 69275 | 221 |
| 69300 | 221 |
| 69305 | 221 |
| 69400 | 221 |
| 69405 | 221 |
| 69600 | 221 |
| 69605 | 221 |
| 70277 | 285 |
| 70307 | 285 |
| 70407 | 285 |
| 70437 | 285 |
| 71119 | 180 |
| 71121 | 180 |
| 71122 | 180 |
| 71470 | 261 |
| 71477 | 261 |
| 72277 | 287 |
| 72307 | 287 |
| 72407 | 287 |
| 72437 | 287 |
| 73119 | 208 |
| 73121 | 208 |
| 73122 | 208 |
| 74119 | 176 |
| 74121 | 176 |
| 74122 | 176 |
| 74277 | 289 |
| 74307 | 289 |
| 74407 | 289 |
| 74437 | 289 |
| 75119 | 177 |
| 75121 | 177 |
| 75122 | 177 |
| 75275 | 238 |
| 75305 | 238 |
| 75405 | 238 |
| 76300 | 229 |
| 76400 | 229 |
| 77019 | 300 |
| 77277 | 283 |
| 77307 | 283 |
| 77407 | 283 |
| 77437 | 283 |
| 79270 | 227 |
| 79275 | 227 |
| 79300 | 227 |

# Numerical Index (Code - Page)


| | |
|---|---|
| 79305 | 227 |
| 79400 | 227 |
| 79405 | 227 |
| 79430 | 300 |
| 80260 | 300 |
| 81990 | 300 |
| 82270 | 225 |
| 82300 | 225 |
| 82400 | 225 |
| 82415 | 295 |
| 82440 | 295 |
| 82475 | 295 |
| 82995 | 300 |
| 83475 | 300 |
| 84270 | 220 |
| 84275 | 220 |
| 84300 | 220 |
| 84305 | 220 |
| 84400 | 220 |
| 84405 | 220 |
| 84431 | 302 |
| 84432 | 302 |
| 84600 | 220 |
| 84605 | 220 |
| 85120 | 307 |
| 85144 | 294 |
| 85183 | 307 |
| 85190 | 307 |
| 85220 | 307 |
| 85244 | 294 |
| 85263 | 307 |
| 85290 | 307 |
| 85330 | 307 |
| 85332 | 307 |
| 85336 | 307 |
| 85360 | 294 |
| 85396 | 307 |
| 85420 | 307 |
| 85444 | 294 |
| 85460 | 294 |
| 85470 | 294 |
| 85475 | 294 |
| 85544 | 294 |
| 85626 | 307 |
| 85634 | 294 |
| 85696 | 307 |
| 85876 | 302 |
| 85884 | 302 |
| 85890 | 294 |
| 85890 | 302 |
| 85894 | 294 |
| 85894 | 302 |
| 85990 | 294 |
| 85993 | 307 |
| 85995 | 294 |
| 85999 | 307 |
| 86019 | 300 |
| 87029 | 300 |
| 87119 | 175 |
| 87122 | 175 |
| 88220 | 240 |
| 88270 | 240 |
| 88300 | 240 |
| 88400 | 240 |
| 88460 | 300 |
| 89260 | 300 |
| 90990 | 300 |
| 91430 | 300 |
| 92119 | 175 |
| 92270 | 224 |
| 92300 | 224 |
| 92353 | 301 |
| 92400 | 224 |
| 92473 | 301 |
| 92553 | 301 |
| 92699 | 301 |
| 92853 | 301 |
| 93470 | 301 |
| 93579 | 301 |
| 95119 | 177 |
| 95121 | 177 |
| 95122 | 177 |
| 95153 | 301 |
| 95179 | 301 |
| 95479 | 301 |
| 96009 | 301 |
| 96307 | 233 |
| 96407 | 233 |
| 96477 | 233 |
| 97220 | 219 |
| 97415 | 295 |
| 98121 | 197 |
| 98122 | 197 |
| 99121 | 183 |
| 99122 | 183 |
| 205280 | 449 |
| 205284 | 449 |
| 205285 | 449 |
| 206280 | 449 |
| 206284 | 449 |
| 206285 | 449 |
| 222230 | 449 |
| 222238 | 449 |
| 223232 | 455 |
| 223233 | 455 |
| 301182 | 449 |
| 12XXXX | 113 |
| 130L006 | 705 |
| 130L006-2 | 706 |
| 130L006-2F | 706 |
| 130L184-5 | 707 |
| 130L184-5F | 707 |
| 130L195-A | 707 |
| 130L195-B | 707 |
| 130L195-C | 706 |
| 130L195-D | 706 |
| 13XXXX | 123 |
| 140026-C3T | 710 |
| 140026-F4T | 710 |
| 140L0261L | 711 |
| 140L026L | 711 |
| 141123-TC3 | 710 |
| 141123-TC3D | 710 |
| 141123-TF4 | 710 |
| 141123-TF4D | 710 |
| 14XXXX | 115 |
| 171160P30-C | 697 |
| 171160P38(N)-C | 697 |
| 17XXXX | 125 |
| 18XXXX | 131 |
| 1XXXXX | 119 |
| 20C90 | 310 |
| 20T90 | 310 |
| 257226C | 451 |
| 258226C | 451 |
| 2XXX1X | 137 |
| 2XXXXX | 37 |
| 2XXXXX | 67 |
| 2XXXXX | 99 |
| 32275-N | 239 |
| 32305-N | 239 |
| 32405-N | 239 |
| 32605-N | 239 |
| 3371-V2 | 317 |
| 33XXXX | 107 |
| 3432-N | 680 |
| 3433-N | 680 |
| 3434-N | 680 |
| 3435-N | 680 |
| 3436-N | 680 |
| 3437-N | 680 |
| 3474-M | 686 |
| 3479(N) | 690 |
| 3480(N) | 690 |
| 3481(N) | 690 |
| 3482(N) | 690 |
| 3483(N) | 690 |
| 3484(N) | 690 |
| 3492-N | 680 |
| 3493-N | 680 |
| 3494-N | 680 |
| 3537(N) | 688 |
| 3538(N) | 688 |
| 3539(N) | 689 |
| 3624-V2 | 317 |
| 3654-N | 677 |
| 3655-N | 677 |
| 3656-N | 677 |
| 3916-N | 601 |
| 3989-V3 | 323 |
| 3990-V3 | 323 |
| 39XX1X | 139 |
| 3X9XXX | 335 |
| 3XXXXX | 55 |
| 4015-V2 | 678 |
| 4016-V2 | 678 |
| 4017-V2 | 678 |
| 4018-V2 | 678 |
| 4019-V2 | 678 |
| 4020-V2 | 678 |
| 4021-V2 | 678 |
| 4022-V2 | 678 |
| 4027-N | 630 |
| 4241-N | 489 |
| 4242-N | 489 |
| 4332-N | 471 |
| 4333-N | 471 |
| 4334-N | 469 |
| 4335-N | 469 |
| 4336-N | 333 |
| 4338-N | 333 |
| 4449-V2 | 341 |
| 4450-V2 | 341 |
| 4457-D | 425 |
| 4458-D | 425 |
| 4459-D | 425 |
| 4460-D | 425 |
| 4499-V2 | 487 |
| 44X9XX | 77 |
| 4500-V2 | 485 |

| | |
|---|---|
| 4649-N | 367 |
| 4650-N | 367 |
| 46XXXX | 143 |
| 4733-V2 | 429 |
| 4734-V2 | 429 |
| 48XXXX | 69 |
| 4985-N | 329 |
| 4986-N | 329 |
| 49XXX2 | 141 |
| 4XXXX8 | 81 |
| 4XXXXX | 39 |
| 505119DIM-C | 692 |
| 505143E-C | 692 |
| 582L015-C3 | 709 |
| 582L015-C3B | 709 |
| 582L015-F4 | 709 |
| 582L015-F4B | 709 |
| 582L016T40E-C3 | 696 |
| 582L016T40E-F | 696 |
| 58XXXX | 103 |
| 592063-G12/3 | 712 |
| 592063-G12/4 | 712 |
| 592063-TC | 712 |
| 592063-TF | 712 |
| 592072-1 | 694 |
| 5920731-(N2) | 694 |
| 592074-C(N) | 695 |
| 592076-C3(N) | 695 |
| 592122-FL2 | 687 |
| 592122-FL2E | 687 |
| 592122-FL3 | 687 |
| 592122-FL3E | 687 |
| 592122R39-2 | 694 |
| 592122R-C3 | 687 |
| 592125R2-C | 691 |
| 592125R2-C3 | 691 |
| 592125R2-F | 691 |
| 592125R-C | 691 |
| 592125R-C3 | 691 |
| 592125R-F | 691 |
| 592125S-6(N) | 689 |
| 592125S-6C(N) | 689 |
| 592125S-6F(N) | 689 |
| 592125SC-2(N) | 689 |
| 592125SC-3(N) | 689 |
| 592125SC-4(N) | 689 |
| 592141-C3E2 | 703 |
| 592141-E4C3 | 703 |
| 592165SIL-C | 698 |
| 592165SIL-F | 698 |
| 592563(N)-4C(N2) | 688 |
| 592563(N)-4F(N2) | 688 |
| 5925631(N)-4C(N2) | 688 |
| 5925631(N)-4F(N2) | 688 |
| 5925631-4C2(N) | 688 |
| 592563-4C2(N) | 688 |
| 592563R1-C2 | 688 |
| 592563R1-C3 | 688 |
| 592563R1-F4 | 688 |
| 592563R-C2 | 688 |
| 592563R-C3 | 688 |
| 592563R-F4 | 688 |
| 5XXXXX | 41 |
| 5XXXXX | 45 |
| 5XXXXX | 79 |
| 61XX0X | 64 |
| 66470/N | 259 |
| 66477/N | 259 |
| 6XXX8X | 53 |
| 6XXXXX | 47 |
| 6XXXXX | 52 |
| 6XXXXX | 53 |
| 6XXXXX | 65 |
| 6XXXXX | 71 |
| 71XXXX | 95 |
| 72XXXX | 91 |
| 74XXXX | 135 |
| 76XXXX | 133 |
| 78XXXX | 89 |
| 79XXXX | 97 |
| 81XX0X | 83 |
| 86XXXX | 121 |
| 88XXXX | 101 |
| 8XXXXX | 85 |
| 8XXXXX | 147 |
| 91XXXX | 109 |
| 92XXXX | 111 |
| 97XX4X | 573 |
| 9XXX1X | 49 |
| 9XXXXX | 117 |
| AXX7X | 159 |
| AXX9X | 159 |
| B9XXXX | 149 |
| BCXX2X | 152 |
| BRXX2X | 151 |
| BTXX2X | 161 |
| BXXXXX | 151 |
| CCT-10DA | 304 |
| CCT-10TR | 305 |
| CCT-20DA | 304 |
| CCT-20TR | 305 |
| CCT-40DA | 304 |
| CCT-40TR | 305 |
| CCT-60DA | 304 |
| CCT-60TR | 305 |
| CXXXX | 153 |
| D-3626 | 317 |
| D-3627 | 317 |
| D-3628 | 317 |
| DM4430 | 273 |
| DM4437 | 273 |
| DM5470 | 275 |
| DM5477 | 275 |
| F1XXXX | 509 |
| F2XXXX | 509 |
| F3XXXX | 509 |
| MCXXXX | 157 |
| NXXXXX | 155 |
| S1XXXX | 507 |
| S2XXXX | 507 |
| S2XXXX | 507 |
| S3XXXX | 507 |
| SP1300 | 265 |
| SP1400 | 265 |
| SP2430 | 267 |
| SP2435 | 267 |
| SP3470 | 269 |
| SP3475 | 269 |
| SP4437 | 271 |
| TR10024 | 308 |
| TR10024DA | 309 |
| TR10024TR | 309 |
| TR15024DA | 309 |
| TR15024TR | 309 |
| TR16024 | 308 |
| TR3024 | 308 |
| TR3024DA | 309 |
| TR6024 | 308 |
| TR6024DA | 309 |
| TXXXXX | 161 |
| VXXXXX | 73 |
| X3XXXX | 61 |
| X5XXXX | 87 |
| X7XXXX | 93 |
| X8XXXX | 63 |
| X9XXXX | 59 |
| XXXXXX | 43 |
| XXXXXX | 57 |
| XXXXXX | 75 |
| XXXXXX | 105 |
| XXXXXX | 153 |
| Z11011 | 163 |
| Z11012 | 163 |
| Z11021 | 163 |
| Z11022 | 163 |
| Z11031 | 163 |
| Z11032 | 163 |
| Z11051 | 163 |
| Z11052 | 163 |
| Z11071 | 163 |
| Z11072 | 163 |
| Z11511 | 163 |
| Z11512 | 163 |
| Z11521 | 163 |
| Z11522 | 163 |
| Z11531 | 163 |
| Z11532 | 163 |
| Z11551 | 163 |
| Z11552 | 163 |
| Z11571 | 163 |
| Z11572 | 163 |
| Z12411 | 163 |
| Z12412 | 163 |
| Z12421 | 163 |
| Z12422 | 163 |
| Z12432 | 163 |
| Z12451 | 163 |
| Z12452 | 163 |
| Z12471 | 163 |
| Z12472 | 163 |
| Z1XX0X | 126 |
| ZXXXXX | 155 |

BENEITO FAURE®

## Headquarters 1




## Headquarters 2



**Headquarters 1**

C/ Thomas Edison, 4-6
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

**Headquarters 2**

C/ Nòria, 10
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)

**Headquarters 3**

C/ Nòria, 15
Polig. Valldoriolf
08430 La Roca del Vallès
Barcelona (Spain)




## Headquarters 3



BENEITO FAURE®

FSC
www.fsc.org
MIX
Paper | Supporting
responsible forestry
FSC® C104592

BENEITO FAURE®